

P-Cap Panel Mount LCD Front side IP65



21.5" (16:9) P-Cap LCD


Specifications

**RoHS
COMPLIANT
2011/65/EU**

Model Name	W22L100-PPA3HB
Viewable Size Image	21.5" (16:9)
Active Display Area (mm)	476.64 (H) x 268.11 (V)
Pixel Pitch (mm)	0.248 (H) x 0.248 (V)
Number of Pixels	1920 x 1080
Contrast Ratio	500:1 (typ.)
Display Color	16.7M (8bit/color)
Brightness (cd/m ²)	1000 (typ.)
Viewing Angle (CR>=10)	-89~89 (H); -89~89 (V)
Synchronization Range Horizontal/Vertical	31.5~80.0KHz / 60~75Hz
Recommended Resolution	1920 x 1080 @ 60Hz
Signal Connector	15 pin D-sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	30W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Touch Screen	Projective Capacitive multi-touch
Operating Temperature	0 deg. C to 50 deg. C

Remarks: W22L100 series= VGA input only
W22L110 series= VGA+Video Input

Mechanical Drawing

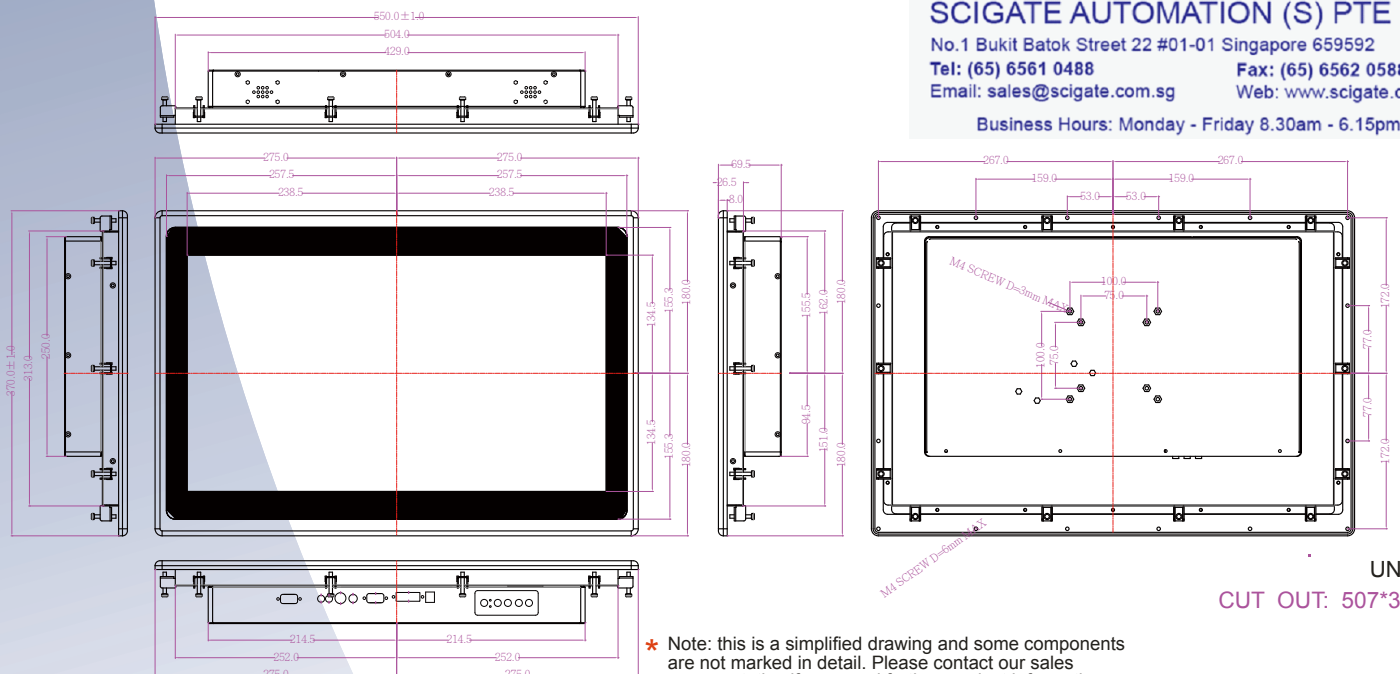

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Revised date: 08-Feb-2017 V1.2

**SCIENCE
GATE**
Your Automation Partner



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm