


## Chassis Monitor

21.5"

### Specifications

**RoHS**  
COMPLIANT  
2011/65/EU

Model Name	W22L100-SDA3
Viewable Size Image	21.5"
Active Display Area(mm)	476.62(H) x 268.11(V)
Pixel Pitch(mm)	0.2485(H) x 0.2485(V)
Number of Pixels	1920 x 1080
Contrast Ratio	3000:1 (typ.)
Display Color	16.7M (8bits/color)
Brightness(cd/m <sup>2</sup> )	250
Viewing Angle(CR>= 10)	-89~89(H); -89~89(V)
Synchronization Range	
Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1920 x 1080 @60Hz
Signal Connector	1 x HDMI 1.3 1 x VGA 2 x CVBS (BNC) 1 x 3G-SDI in 1 x 3G-SDI out (loop out)
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	30W typical, normal operation
Touch Screen	P-CAP, Support 10 point




1. USB for Touch
2. 3G-SDI output
3. 3G-SDI input
4. 2 x CVBS
5. VGA
6. HDMI 1.3
7. Power input

### Mechanical Drawing



**SCIGATE AUTOMATION (S) PTE LTD**  
 No.1 Bukit Batok Street 22 #01-01 Singapore 659592  
 Tel: (65) 6561 0488 Fax: (65) 6562 0588  
 Email: sales@scigate.com.sg Web: www.scigate.com.sg  
 Business Hours: Monday - Friday 8.30am - 6.15pm

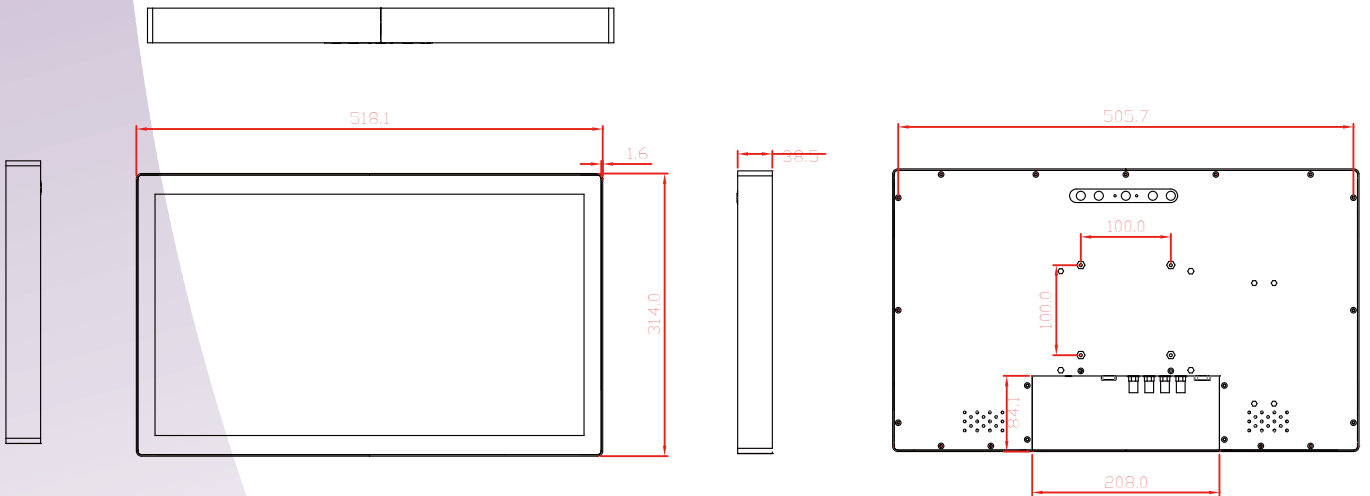

UNIT:mm

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.