STAINLESS LCD

21.5"(16:9)

RoHS COMPLIANT 2002/95/EC

Specifications

Model Name	W22L100-STA3
Viewable Size Image	21.5"(16:9)
Active Display Area(mm)	476.64(H)x268.11(V)
Pixel Pitch(mm)	0.24825(H)x0.24825(V)
Number of Pixels	1920x1080
Contrast Ratio	3000:1
Display Color	16.7M
Brightness(cd/m²)	250
Viewing Angle(CR>=10)	-85~85(H);-80~80(V)
Synchronization Range Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1920x1080@ 60Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	25W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive

Remarks:W22L100 series= VGA input only
W22L110 series= VGA+Video Input

SCIENCE GATE Your Automation Partner

SCIGATE AUTOMATION (S) PTE LTD
No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm

Mechanical Drawing

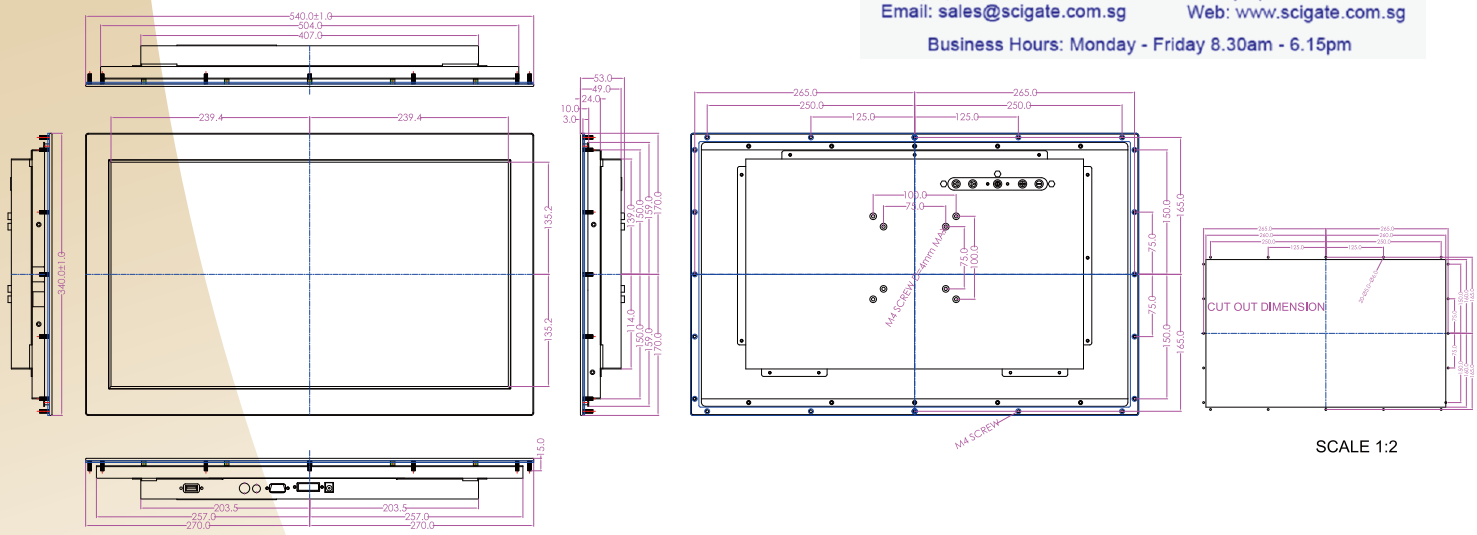

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales repre entative if you need further product information.