

Panel Mount LCD




24"(16:10)

Specifications



Model Name	W24L100-PMS1(Standard) W24L100-PMS1-S(with SAW Touch)
Viewable Size Image	24" (16:10)
Active Display Area(mm)	518.4 (H) x 324.0 (V)
Pixel Pitch(mm)	0.270 (H) x 0.270 (V)
Number of Pixels	1920 x 1200
Contrast Ratio	1000:1(typ.)
Display Color	16.7M (8bit/colors)
Brightness(cd/m)	300
Viewing Angle(CR>=10)	-89~89 (H); -89~89(V)
Synchronization Range	31.5~80.0KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1920x1200@60Hz
Standard Input Signal	1 x VGA (D-sub 15) 1 x HDMI (Type-A)
Touch Screen(Optional-1)	Resistive Touch Protective Glass
Touch Screen(Optional-2)*	SAW Touch (Surface Acoustic Wave)
Touch Interface	USB / RS232
Audio / Speakers (Optional)*	Audio line in (3.5mm) + Speaker x 2
OSD	5 Keys: -, +, Power, Esc, Enter
Power Input	12V DC input (2.5ψ) with external AC-DC Adapter (100V~240V)
Power Consumption	40W typical, Normal operation
Operating temperature	0~50°C
Storage Temperature	-10~60°C
Accessories	Power AC-DC Adapter (100V~240V) VGA cable (1.8m) HDMI cable (2m)

Remarks: W24L100series= VGA Input only
W24L110 series= VGA+Video Input

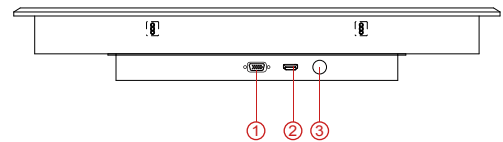

1. VGA
2. HDMI
3. 12V DC-in

I/O Optional	
Optional 1*	1 x VGA (D-sub 15) 1 x HDMI (Type-A) 1 x DVI-D
Optional 2*	1 x VGA (D-sub 15) 1 x DVI-D 1 x S-Video 1 x Composite




SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

Mechanical Drawing (with Resistive Touch)

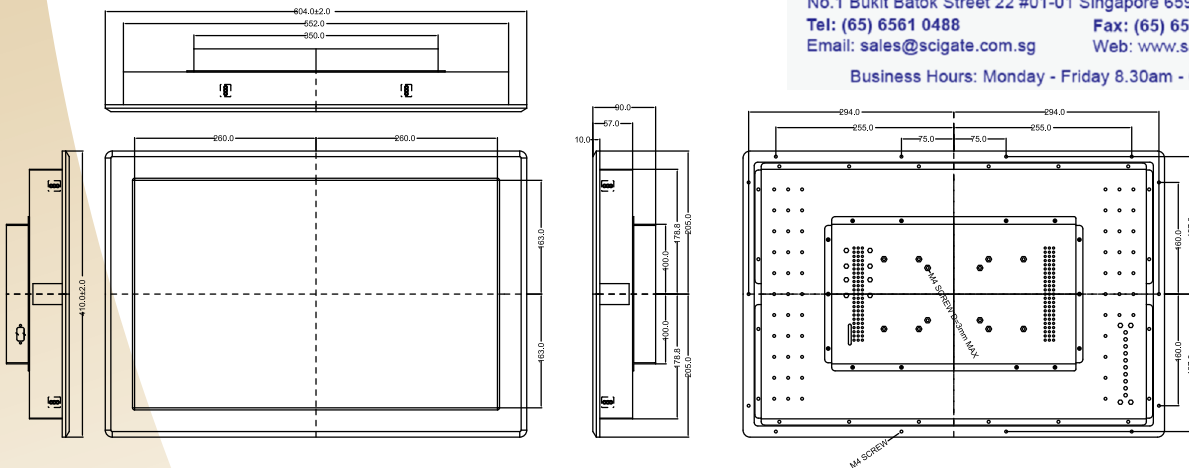

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.