

# Chassis Monitor

## Chassis Monitor




27" (16:9)

### Specifications



Model Name	W27L100-CHA1
Panel Size	27"
Active Display Area(mm)	596.7 (H) x 336.15 (V)
Resolution	1920 x 1080
Brightness(cd/m <sup>2</sup> )	300 (Typical)
Contrast Ratio	3000:1 (Typical)
Viewing Angles(CR>=10 L/R/U/D)	-89~89(H) ; -89~89(V)
Display Colors	16.7M (8 bits/color)
Standard Input Signal	1 x VGA (D-sub 15) 1 x HDMI (Type-A)
Touch Screen(Optional-1)	Protective Glass
Touch Screen(Optional-2)*	SAW Touch (Surface Acoustic Wave)
Touch Interface	USB / RS232
Audio / Speakers (Optional)*	Audio line in (3.5mm) + Speaker x2
OSD	5 Keys: -, +, Power, Esc, Enter
Power Input	12V DC input (2.5ψ) with external AC-DC Adapter (100V~240V)
Power Consumption	40W typical, Normal operation
Operating temperature	0~50°C
Storage Temperature	-10~60°C
Accessories	Power AC-DC Adapter(100V~240V) VGA cable (1.8m) HDMI cable (2m)

\*Outside dimension and I/O will be different from standard



- ① VGA
- ② HDMI
- ③ 12V DC-in

#### I/O Optional


Optional 1*	1 x VGA (D-sub 15) 1 x HDMI (Type-A) 1 x DVI-D
Optional 2*	1 x VGA (D-sub 15) 1 x DVI-D 1 x S-Video 1 x Composite



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592  
Tel: (65) 6561 0488 Fax: (65) 6562 0588  
Email: sales@scigate.com.sg Web: www.scigate.com.sg  
Business Hours: Monday - Friday 8.30am - 6.15pm

### Mechanical Drawing (without touch)

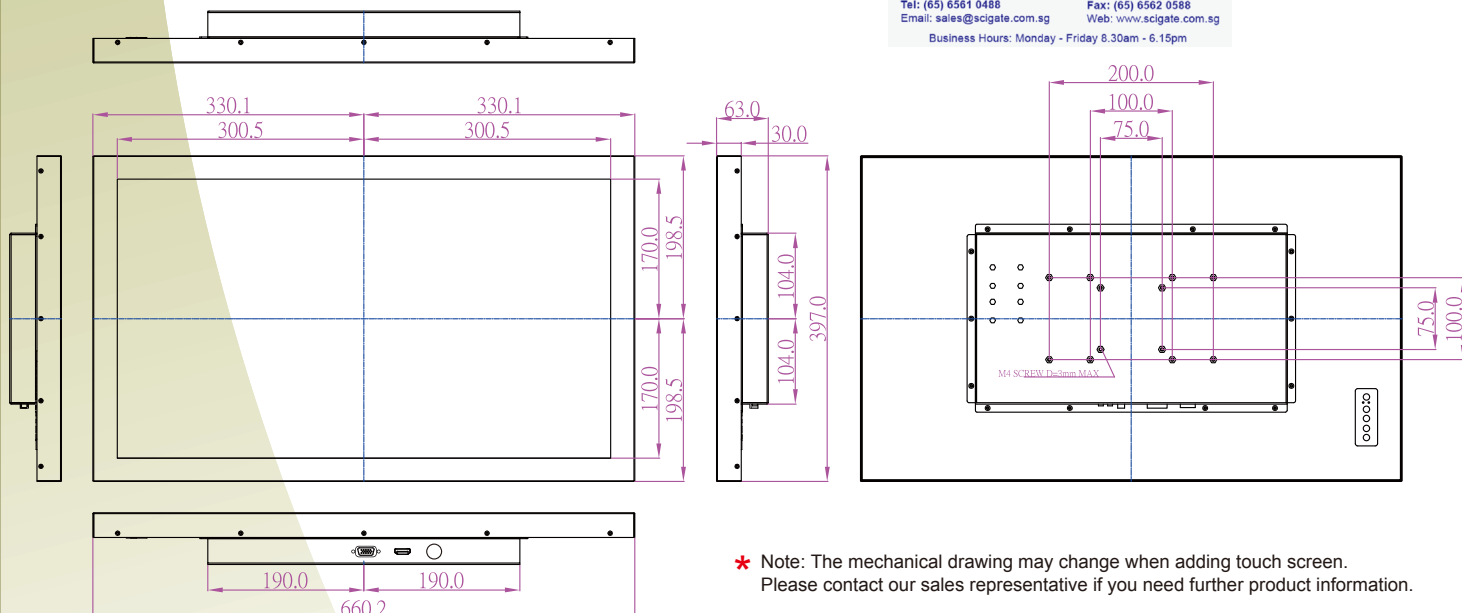

\* Note: The mechanical drawing may change when adding touch screen. Please contact our sales representative if you need further product information.

Revised date: 11-Oct-2017 V2.0