


# Chassis Monitor

## Bar-Type Chassis Monitor

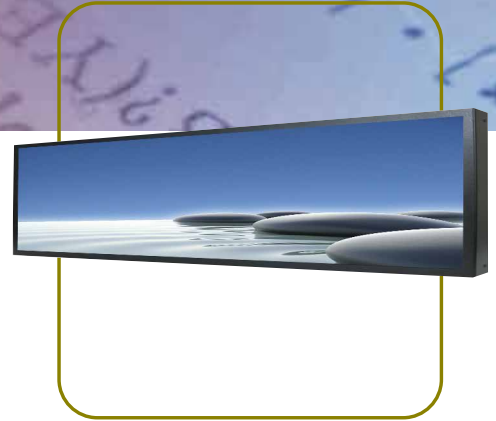

28.6"

### Specifications




|  |   |
|--|---|
| Model Name                                   | W28L100-CHA2  |
| Viewable Size                                | 28.6"   |
| Active Display Area(mm)                      | 698.4(H) x 196.4(V)                                     |
| Pixel Pitch(mm)                              | 0.363(H) x 0.363(V)                                     |
| Number of Pixels                             | 1920x540  |
| Contrast Ratio                               | 1000:1(typ.)  |
| Number of Colors                             | 16.7M   |
| Brightness(cd/m <sup>2</sup> )               | 1000(typ.)  |
| Viewing Angle(CR>=10)                        | -89~89 (H);-89~89 (V)                                   |
| Synchronization Range<br>Horizontal/Vertical | 31.5~60.0KHz/60~75Hz                                    |
| Recommended Resolution                       | 1920x540@ 60Hz  |
| Power Source                                 | 12V DC in, with External AC to DC Adapter (100~240V AC) |
| Power Consumption                            | 40W typical,normal operation                            |
| Power Management                             | VESA DPMS Compliant                                     |
| Plug & Play                                  | VESA DDC 1/2B   |
| VGA Input                                    | Yes   |
| DVI Input                                    | Yes (DVI-D Single link)                                 |
| HDMI Input                                   | Yes   |

### Accessories

|              |                           |   |
|--------------|---------------------------|---|
| VGA cable    | D-sub 15 pin male to male | ✓ |
| DVI cable    | 24 pin male to male       | ✓ |
| HDMI cable   | 19 pin male to male       | ✓ |
| User Manual  | User guide                | ✓ |
| User adapter | 12V power adapter         | ✓ |

### Mechanical Drawing:W28L100-CHA2

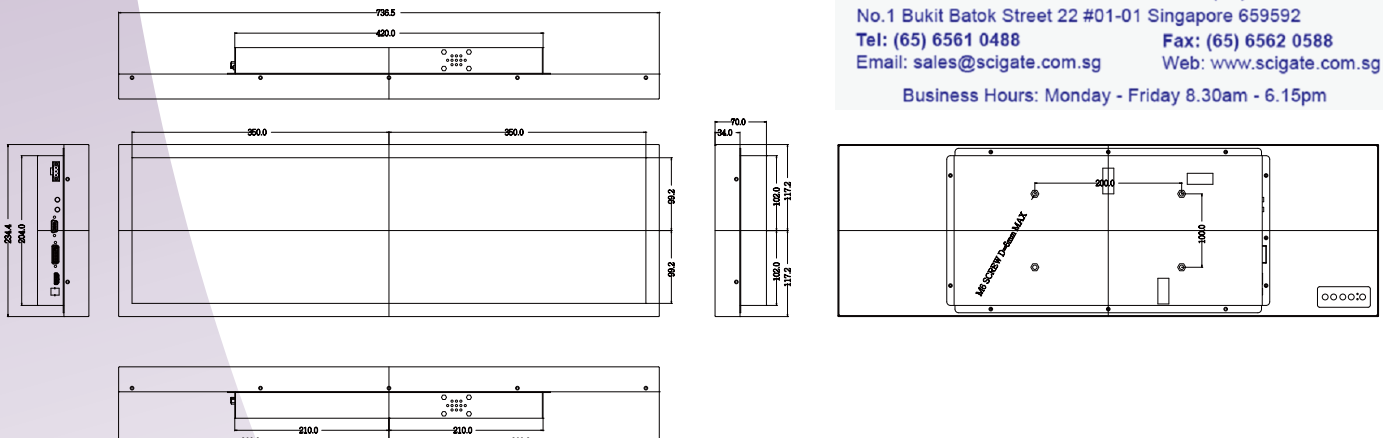

UNIT:mm

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.



### SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592  
 Tel: (65) 6561 0488 Fax: (65) 6562 0588  
 Email: sales@scigate.com.sg Web: www.scigate.com.sg  
 Business Hours: Monday - Friday 8.30am - 6.15pm