

Chassis Monitor

Chassis Monitor



30" (16:10)

Specifications




Model Name	W30L100-CHL1
Viewable Size Image	30"(16:10)
Active Display Area(mm)	641.28 (H) x 335.6 (V)
Pixel Pitch(mm)	0.2505x0.2505
Number of Pixels	2560x1600
Contrast Ratio	1000:1(typ.)
Display Color	1.07Billion Color
Brightness(cd/m ²)	350(typ.)
Viewing Angle(CR>=10)	-89~89(H);-89~89(V)
Recommended Resolution	2560x1600@ 60Hz
Signal Connector	<ul style="list-style-type: none"> • HDMI x 1, with HDMI 1.4 Cable, support to WQHD (2560x1600) • Display Port x 1, support to WQHD (2560x1600) • DVI x 1, with dual link cable, support to WQHD (2560x1600) • D-Sub x 1, support to FHD(1920x1080)
Power Source	12VDC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	86W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Touch Screen	SAW
Operating Temp	0~50
Storage Temp	-20~60
Operating Humidity	30%~90%
Storage Humidity	10%~90%
Anti-Vibration	Random vibration: 5~ 500Hz Impact acceleration: 1G (follow IEC- 60068-2-64)




SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592
 Tel: (65) 6561 0488 Fax: (65) 6562 0588
 Email: sales@scigate.com.sg Web: www.scigate.com.sg
 Business Hours: Monday - Friday 8.30am - 6.15pm

Mechanical Drawing

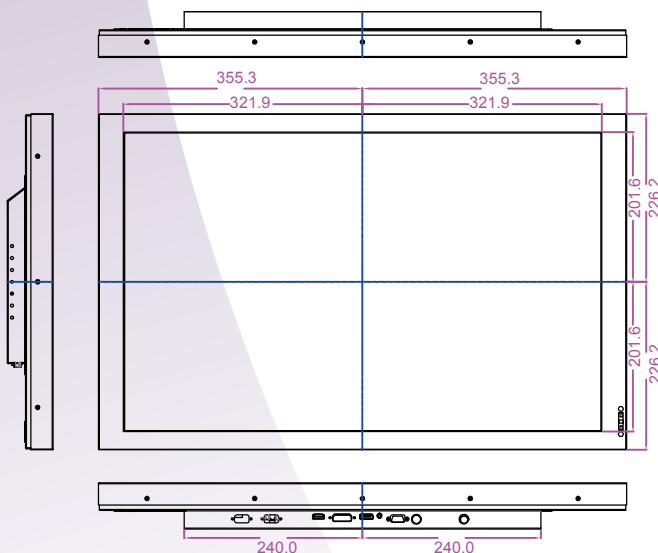

UNIT:mm

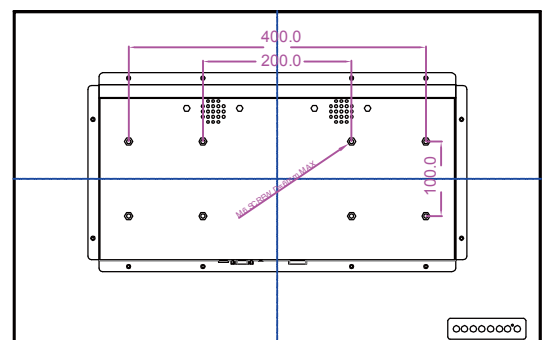

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Revised date: 24-Jun-2016 V1.6