
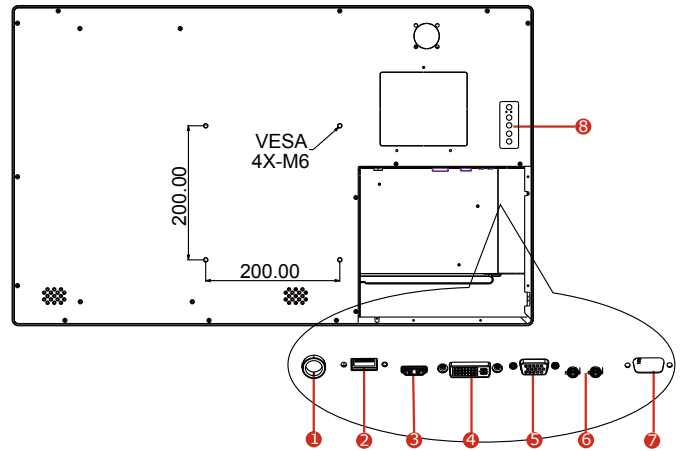


32" P-Cap Chassis Display - W32L100-PCA3

Features

- 32" 1920 x 1080 Resolution
- Projected Capacitive Multi-Touch (P-Cap)
- Front IP65 Water and Dust Proof
- VGA input and variety of optional connectors
- USB port for touch
- Stylish and elegant design

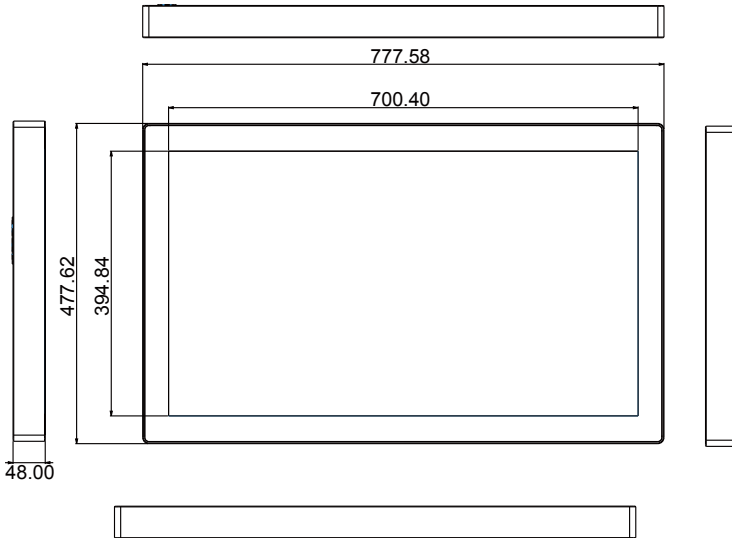

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

1. 1 x 24V DC Power Jack
2. 1 x USB for Touch (Optional)
3. 1 x HDMI
4. 1 x DVI-D
5. 1 x VGA
6. 2 x Audio (Optional)
7. 1 x RS232 (Optional)
8. OSD Control Panel

Specifications

Display Spec :

- Size/Type : 32" TFT
- Resolutions : 1920 x 1080
- Brightness : 350cd/m² (typ.)
- Contrast Ratio : 300 : 1 (typ.)
- Viewing Angle : -89~89(H); -89~89(V)
- Max Colors : 16.7M
- Touch : Projective-Capacitive Touch (Optional)

Power Specification :

- Power Input : 24V DC, with External AC to DC Adapter (100~240V AC)
- Power Consumption : 75 W typical, normal operation

Environment Considerations :

- Operating Temperature : 0 °C to 50 °C
- Operating Humidity : 10% to 90% (non-condensing)
- IP Rating : Front IP65

Input Specifications :

- Input Ports : 1 x VGA
1 x DVI-D
1 x HDMI
2 x Audio (Optional)
- USB Port (Touch) : 1 x USB
- Remote Control : 1 x RS232 (Optional)
- Speaker : 2 x speaker

Mechanical Specification :

- Mounting : VESA Mount (200x200mm)
- Dimensions (W x H x D) : 777.58 x 477.62 x 48 (mm)



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

