

55" Panel PC (W55OMIS-CHL2)

Intel® Core i3 Processor

Features

- Combination of 55" display and pluggable PC module
- Embedded Intel® Core i3 Processor
- Built-in OPS (Open Pluggable Specification)
- 1920x 1080 resolution
- Optional touch



Specifications


Model Name:W55OMIS-CHL2

Display	Resolution	1920x 1080		
	Contrast Ratio	4000:1		
	Viewing Angles	-89~89 (H); -89~89 (V)		
	Maximum Colors	16.7M		
	Brightness	450 nit		
Touch(Optional)	Technology	SAW / Optical Touch		
System Specification	CPU	Intel® Core i3 Processor		
	BIOS	AMI UEFI BIOS / iAMT		
	System Chipset	Intel® QM67 Chipset		
	System Memory	SO-DIMM DDR3-1333MT/s, up to 4GB		
	Operating System (Optional)	Windows Embedded Standard 7		
	Storage	2.5" SATA HDD 500GB		
	Graphic Chipset	Integrated Graphics		
	Ethernet	Intel® 82579 LM Gigabit Ethernet		
I/O Interface	Display Side	1 x Mini D-sub 15pin In	1 x RCA L/R In	
		1 x DVI-D In	1 x RCA L/R Out	
		1 x DVI-I Out	1 x Audio Jack In	
		1 x Component In (YPbPr)	1 x RS232 In (for control usage)	
		1 x HDMI In	1 x RS232 Out (for control usage)	
		1 x Display port In	1 x LAN (for control usage)	
	OPS Module Side	1 x HDMI		
		1 x RJ-45		
		2x USB (USB 2.0 compliant)		
		2x RS232 (using Display Port Connector)		
Power Requirement	Power Input	110~240V AC in		
	Power Consumption	140W(Typ.)		
Physical Characteristics	Dimensions (Wx Hx D)	1244.4 x 715.2x 69 mm		
Environment	Operating Temperature	0°C~45°C		
	Operating Humidity	20%~ 80% (non-condensing, RH)		
	Mounting	VESA mounting		
Certification	Electromagnetic	CE, FCC		
Wireless Communication (Optional, Either one)	Wi-Fi	via half mini PCIe Card		
	3G	On board sim slot		

55" Panel PC (W55OMIS-CHL2)

Intel® Core i3 Processor


Dimension

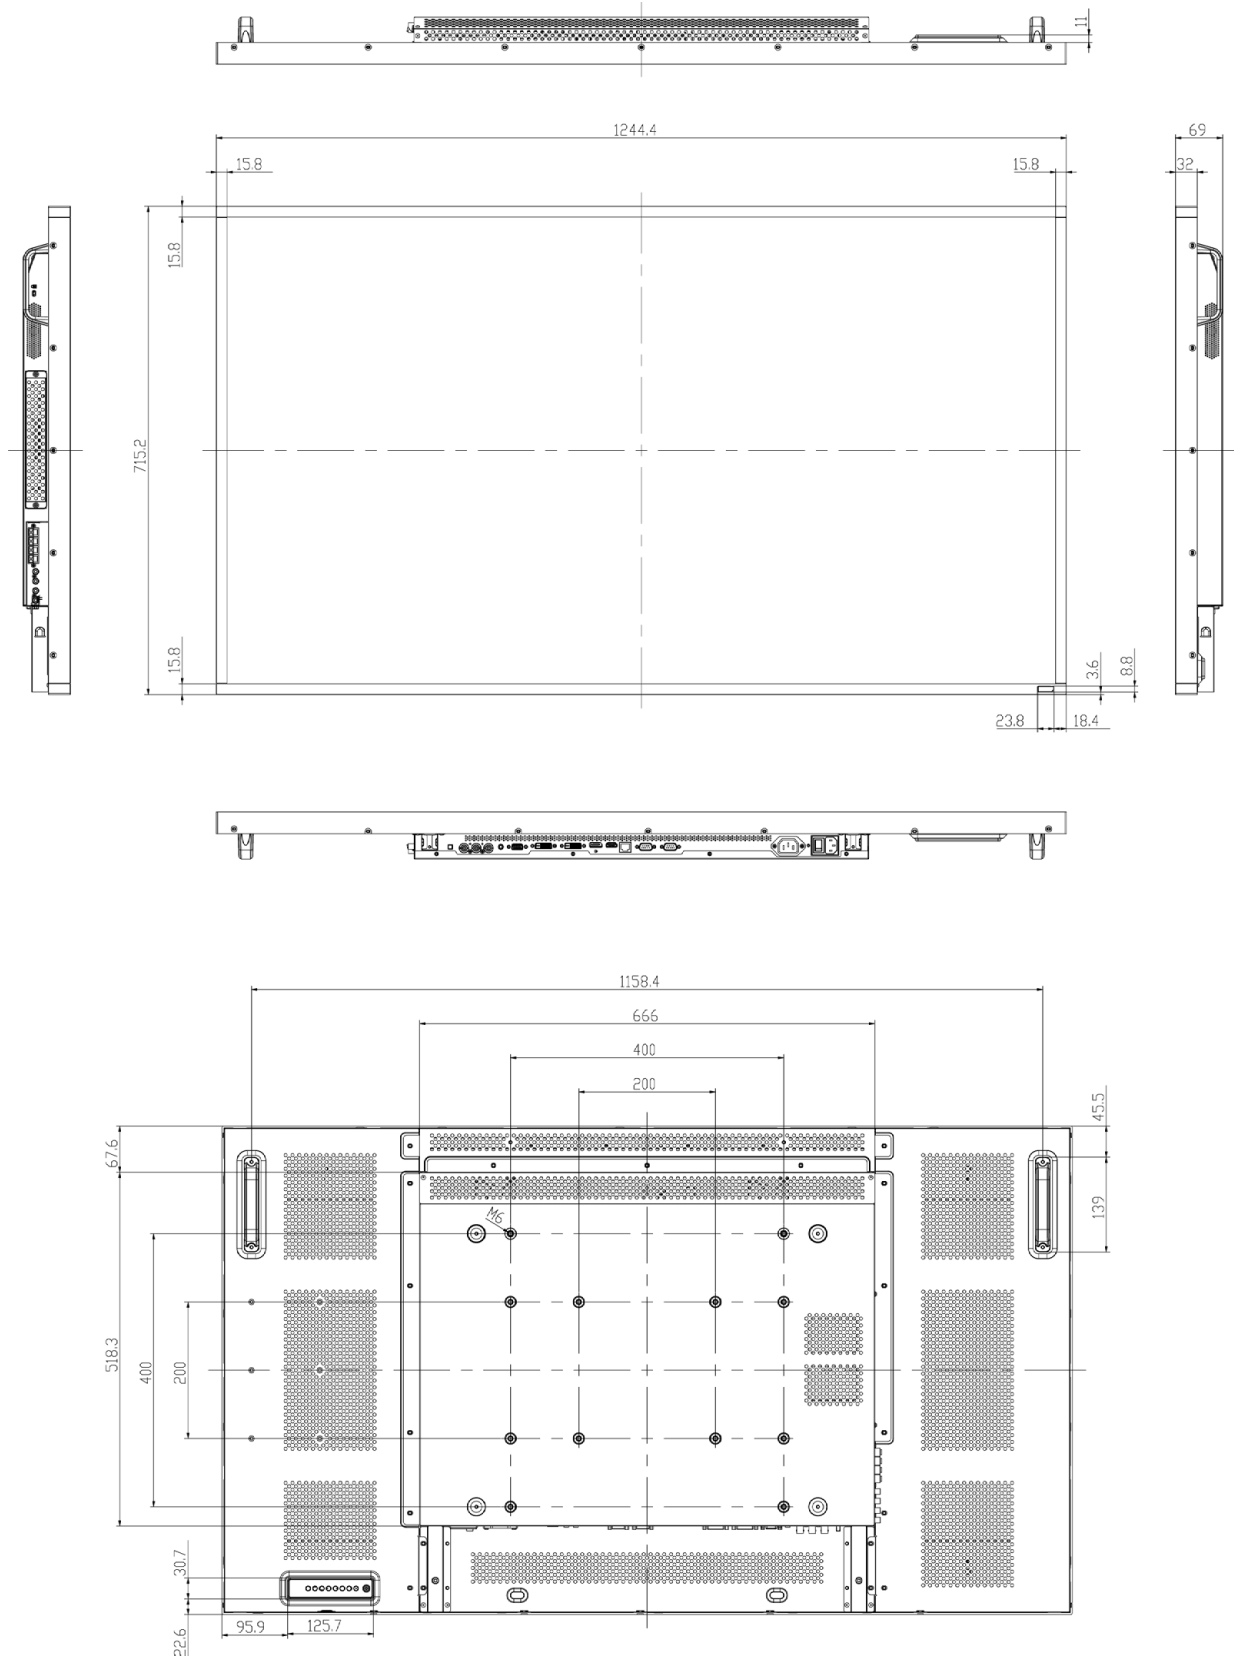

55" Panel PC (W550MIS-CHL2)


Intel® Core i3 Processor

I/O Placement

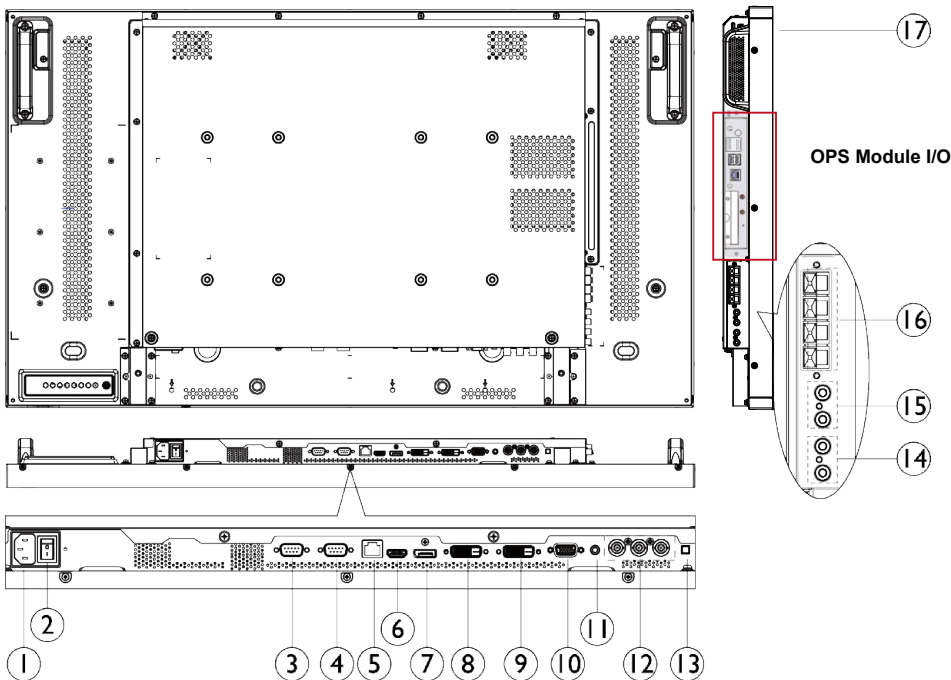

- | | | |
|--|---|--|
| <p>1 AC IN
AC power input from the wall outlet.</p> <p>2 MAIN POWER SWITCH
Switch the main power on/off.</p> <p>3 RS232C OUT
RS232C network output for the loop-through function.</p> <p>4 RS232C IN
RS232C network input for the loop-through function.</p> <p>5 RJ-45
LAN port connection from your OPS device.</p> <p>6 HDMI IN
HDMI video/audio input.</p> | <p>7 DisplayPort
DisplayPort video input.</p> <p>8 DVI IN
DVI-D video input.</p> <p>9 DVI OUT / VGA OUT
DVI or VGA video output.</p> <p>10 VGA IN (D-Sub)
VGA video input.</p> <p>11 VGA AUDIO IN
Audio input for VGA source (3.5mm stereo phone).</p> <p>12 COMPONENT IN (BNC)
Component YPbPr video source input.</p> | <p>13 SPEAKER SWITCH
Internal speaker on/off switch.</p> <p>14 AUDIO IN
Audio input from external AV device (RCA).</p> <p>15 AUDIO OUT (RCA)
Audio output from the AUDIO IN jack to an external AV device.</p> <p>16 SPEAKERS OUT
External speakers output.</p> <p>17 KENSINGTON LOCK
Used for security and theft prevention.</p> |
|--|---|--|

Module side

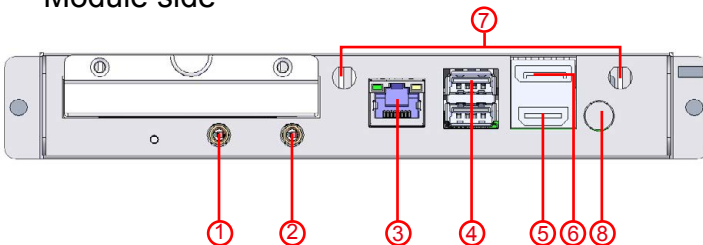

- | | |
|--|---|
| <p>1. Line Out</p> <p>2. Line In</p> <p>3. RJ45</p> <p>4.2 x USB</p> | <p>5. HDMI</p> <p>6.2 x RS-232 (Via DP Connector)</p> <p>7. Antenna (Optional)</p> <p>8. Power Switch</p> |
|--|---|



SCIGATE AUTOMATION (S) PTE LTD

No. 1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm