

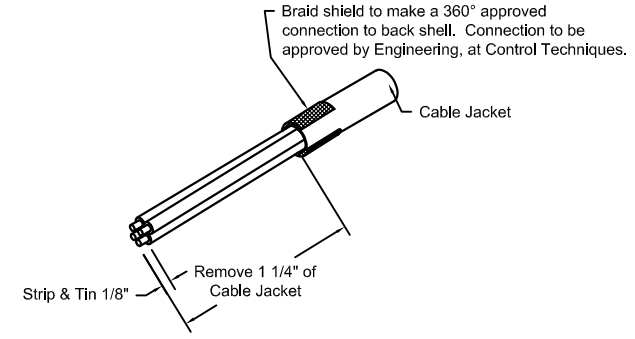


Note: Inner foil shields are already mechanical connected to outer braid shield by raw cable manufacture.

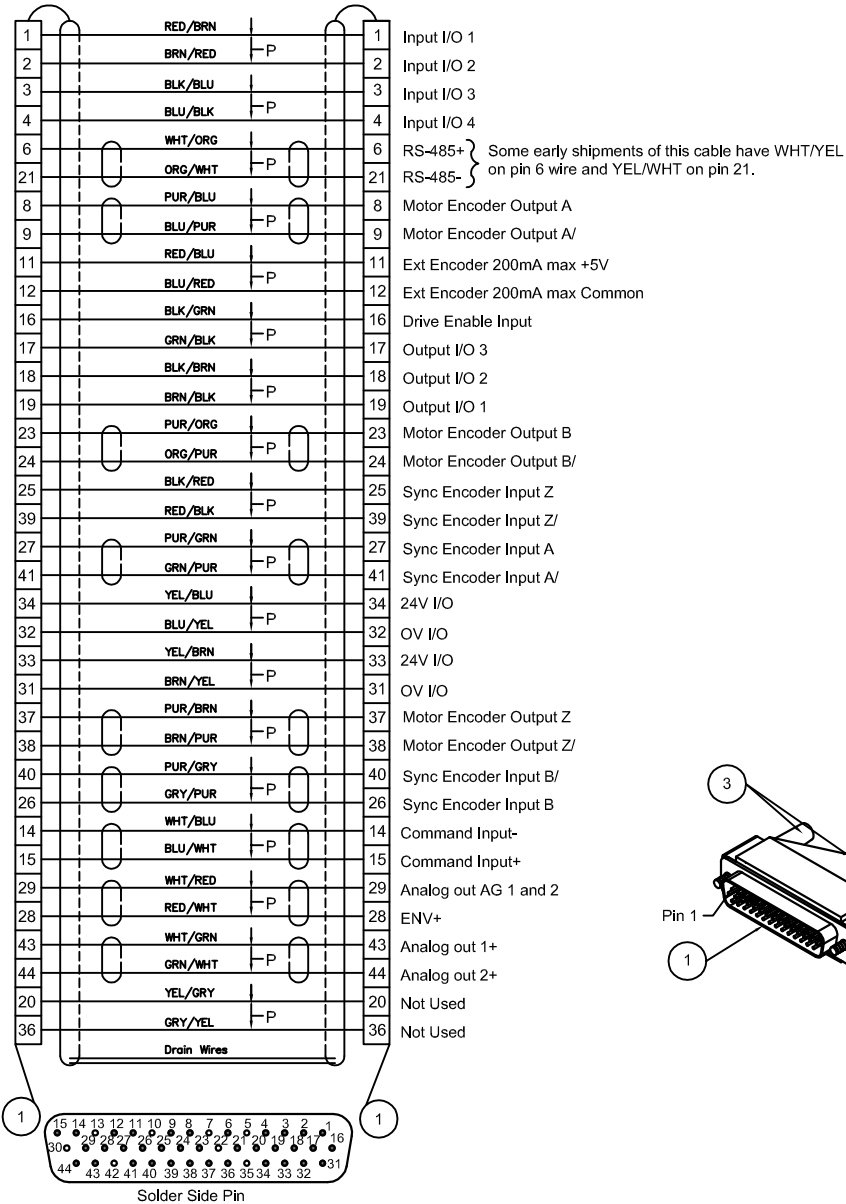

DETAIL "A"

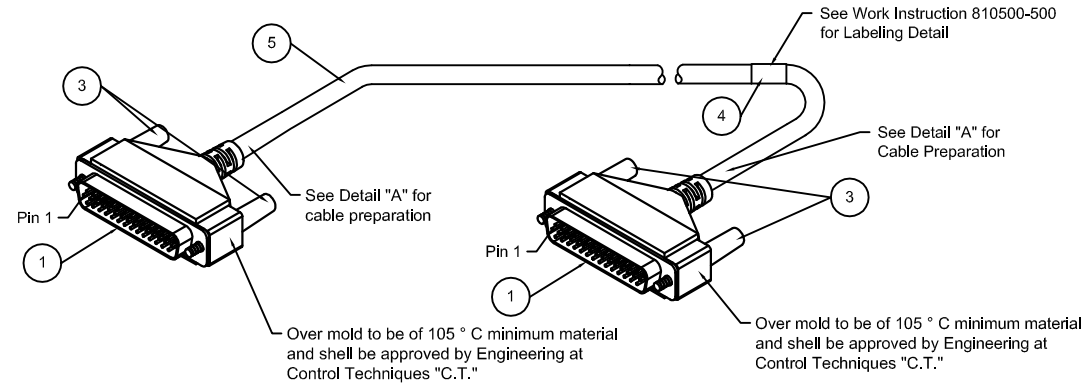

Note:
1. Test Continuity and 100 VDC Hipot test per schematic.

REV	ECO NUMBER	DATE	BY	APPROVED	ENG. APPD/CHK DATE	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS ON	CONTROL TECHNIQUES			12005 TECHNOLOGY DR. EDEN PRAIRIE, MN 55344	
A5	4067	08/07/03	Gene S	<i>Gene S</i>		± .01	± .005	± .50°	DRAWING, CABLE ASSY, CMDX		
A4	3418	03/28/00	BJD	<i>BJD</i>		MATERIAL: SEE BOM			DESCRIPTION:		
A3	3019	02/24/98	BMA	<i>BMA</i>	03/09/98	FINISH: SEE NOTES			SCALE: N/A		
A2	2936	10/20/97	BMA	<i>BMA</i>	10/31/97	DWG BY DATE: Beth A 06/19/97			DWG NO. 810708-000		
A1	2907	06/23/97	BMA			ENG. APPD/CHK DATE			REV A5		
									SHEET SHT 1 OF 1		