


HANDHELD DIGITAL MANOMETER PG-100

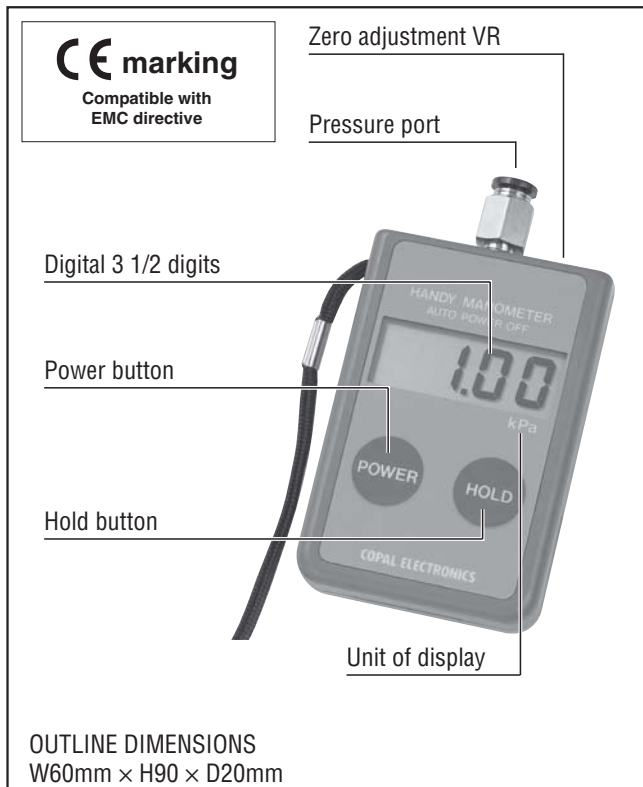

FEATURES

- **Excellent stability**
Pressure-sensitive element of semiconductor chip and circuit technology guarantees excellent temperature compensation.
- **Super long battery life**
A 3.6 V lithium battery incorporated has the long life to last over 3000 hours.
- **Automatic power off**
Automatic power off function works in approximately 3 minutes, which minimizes battery waste.
- **Handy size and easy one hand operation**
- **Easy reading with a large LCD display**
No reading error because of digital display with the holding function.
- **Meet EMC standard**
EN 55011 (EMI)
EN 50082-1 (EMS)

MODEL NUMBER DESIGNATION

P G - 1 0 0 - 1 0 2 G P		
Series name	1 0 0	Pressure reference
Rated pressure range	1 0 2	G : Gauge
101 : 0 ~ 9.81 kPa (0 ~ 0.1 kgf/cm ²)	0 ~ 10 kPa (When displayed in the unit of Pa)	GH : Gauge
102 : 0 ~ 98.1 kPa (0 ~ 1 kgf/cm ²)	0 ~ 100 kPa (When displayed in the unit of Pa)	VH : Gauge (Vacuum)
103 : 0 ~ 981 kPa (0 ~ 10 kgf/cm ²)	0 ~ 1 MPa (When displayed in the unit of Pa)	AH : Absolute
		GP : Gauge Pa unit display
		GMP : Gauge (103 type only) Pa unit display
		RP : Gauge (Compound pressure) Pa unit display
		VP : Gauge (Vacuum) Pa unit display
		AP : Absolute Pa unit display

※ Please refer to the LIST OF MODEL NUMBERS when placing orders.

PG-100

HANDHELD DIGITAL MANOMETER

LIST OF MODEL NUMBERS

<Pa version>

Pressure reference	Gauge				Absolute
Rated pressure range kPa	0 ~ 10	0 ~ 100	0 ~ 1000	0 ~ - 100	100 kPa abs
Unit of display	kPa				
Part number	PG-100-101GP	PG-100-102GP	PG-100-103GP	PG-100-102VP	PG-100-102AP
Unit of display	MPa				
Part number			↻ PG-100-103GMP		

The GMP version, marked ↻ is manufactured upon receipt of order basis.

<Compound pressure version>

Pressure reference	Gauge		
Rated pressure range kPa	- 10 ~ 10	- 100 ~ 100	- 100 ~ 1000
Unit of display	kPa		
Model number	PG-100-101RP	PG-100-102RP	PG-100-103RP

<Non SI unit version>

Pressure reference	Gauge					Absolute
kPa (kgf/cm ²) Rated pressure range	0 ~ 9.81 {0 ~ 1000 mmH ₂ O}	0 ~ 98.1 {0 ~ 1}	0 ~ 981 {0 ~ 10}	0 ~ - 98.1 {0 ~ - 735 mmHg}	0 ~ 98.1 {0 ~ 735 mmHg}	0 ~ 98.1 kPa abs {0 ~ 735 mmHg abs}
Unit of display	mmH ₂ O	kgf/cm ²		mmHg		
Part number	↻ PG-100-101G	↻ PG-100-102G	↻ PG-100-103G	↻ PG-100-102VH	↻ PG-100-102GH	↻ PG-100-102AH

☐: Not available

※ Verify the above model numbers when placing orders.

Marked ↻ is manufactured upon receipt of order basis.

<Option>

- The soft carrying case for PG-100 – Order item: PG-100 soft carrying case (Useful for when carrying out and keeping.)
- DC3.6 V lithium battery – Order item: Lithium battery (The battery is an expendable item. The first one is provided with the unit.)



The soft carrying case for PG-100 (Option)

PG-100

HANDHELD DIGITAL MANOMETER

STANDARD SPECIFICATIONS

<Pa version>

● Unless otherwise specified, the specs are defined at an ambient temperature of 25 ± 5 °C.

Item		PG-100					
General specifications	Pressure reference	Gauge				Absolute	
	Model number	101GP	102GP	103GP 103GMP	102VP	102AP	
	Rated pressure range	kPa	10	100	1000	- 100	100 kPa abs
	Maximum pressure	kPa	20	200	1500	200	200 kPa abs
	Break-down pressure	kPa	50	500	2000	500	500 kPa abs
	Operating temp. range	°C	0 ~ 50				
	Compensated temp. range	°C	0 ~ 50				
	Operating humidity	% RH	35 ~ 85 (No condensation)				
	Storage temp.	°C	- 20 ~ 70 (Atmospheric pressure, humidity 65 %RH maximum)				
	Pressure medium		Non-corrosive gases				
	Pressure port		M 5 female				
	Net weight	g	Approx. 85				
	Power		Lithium battery DC3.6 V Battery life 3000 h minimum				
Display	No. of digits	3 1/2					
	Display element	LCD					
	Rated display range	※	0.00 ~ 10.00	00.0 ~ 100.0	000 ~ 1000 .000 ~ 1.000 (MPa)	00.0 ~ - 100.0	00.0 ~ 100.0 (kPa abs)
	Display cycle		Approx. 3 times/s				
	Display accuracy	maximum	± 0.5 %F.S. ± 2 counts (at 25 °C ± 5 °C)				
	Thermal error	ZERO maximum	± 0.1 %F.S./°C ± 2 counts	± 0.05 %F.S./°C ± 2 counts			± 0.1 %F.S./°C ± 2 counts
		SPAN	± 0.05 % Reading/°C ± 2 counts				
Resolution		1 count					
Additional function		Auto power off (3 min), Display hold, Battery replacement display					
Accessories		Attachments : Half union (for a tube of $\varphi 6$ O.D.), and Barb fitting (for a tube of $\varphi 4$ I.D.), one piece each.					

※ The value out of rated pressure range can be displayed, but the accuracy is not guaranteed.

PG-100

HANDHELD DIGITAL MANOMETER

STANDARD SPECIFICATIONS

<Compound pressure version>

● Unless otherwise specified, the specs are defined at an ambient temperature of 25 ± 5 °C.

Item		PG-100			
General specifications	Pressure reference	Gauge			
	Model number	101RP	102RP	103RP	
	Rated pressure range	kPa – 10 ~ 10	– 100 ~ 100	– 100 ~ 1000	
	Maximum pressure	kPa 20	200	1500	
	Break-down pressure	kPa 50	500	2000	
	Operating temp. range	°C	0 ~ 50		
	Compensated temp. range	°C	0 ~ 50		
	Operating humidity	% RH	35 ~ 85 (No condensation)		
	Storage temp.	°C	– 20 ~ 70 (Atmospheric pressure, humidity 65 %RH maximum)		
	Pressure medium		Non-corrosive gases		
	Pressure port		M 5 female		
	Net weight	g	Approx. 100		
	Power		Lithium batteryDC3.6 V Battery life 3000 h minimum		
Display	No. of digits	3 1/2			
	Display element	LCD			
	Rated display range	– 10.00 ~ 10.00	– 100.0 ~ 100.0	– 100 ~ 1000	
	Display cycle	Approx. 3 times/s			
	Display accuracy (at 25 °C ± 5 °C)	± 1 %F.S. ± 2 counts	± 0.5 %F.S. ± 2 counts		
	Thermal error	ZERO maximum	± 0.1 %F.S./°C ± 2 counts	± 0.05 %F.S./°C ± 2 counts	
		SPAN	± 0.05 % Reading/°C ± 2 counts		
Resolution		1 count			
Additional function		Auto power off (3 min), Display hold, Battery replacement display			
Accessories		Attachments : Half union (for a tube of φ 6 O.D.), and, Barb fitting (for a tube of φ 4 I.D.), one piece each.			

PG-100

HANDHELD DIGITAL MANOMETER

STANDARD SPECIFICATIONS

<Non SI unit version>

● Unless otherwise specified, the specs are defined at an ambient temperature of 25 ± 5 °C.

Item		PG-100					
General specifications	Pressure reference	Gauge					Absolute
	Model number	101G	102G	103G	102VH	102GH	102AH
	Rated pressure range	kPa {kgf/cm ² } 9.81 {1000 mmH ₂ O}	98.1 {1}	981 {10}	- 98.1 {- 735 mmHg}	98.1 {735 mmHg}	98.1 kPa abs {735 mmHg abs}
	Maximum pressure	kPa {kgf/cm ² } 19.6 {2000 mmH ₂ O}	196 {2}	1471 {15}	196 {1471 mmHg}		196 kPa abs {1471 mmHg abs}
	Break-down pressure	kPa {kgf/cm ² } 49.0 {5000 mmH ₂ O}	490 {5}	1961 {20}	490 {3678 mmHg}		490 kPa abs {3678 mmHg abs}
	Operating temp. range	°C	0 ~ 50				
	Compensated temp. range	°C	0 ~ 50				
	Operating humidity	% RH	35 ~ 85 (No condensation)				
	Storage temp.	°C	- 20 ~ 70 (Atmospheric pressure, humidity 65 %RH maximum)				
	Pressure medium		Non-corrosive gases				
	Pressure port		M 5 female				
	Net weight	g	Approx. 100				
	Power		Lithium battery DC3.6 V Battery life 3000 h minimum				
Display	No. of digits	3 1/2					
	Display element	LCD					
	Rated display range	000 ~ 1000 mmH ₂ O	.000 ~ 1.000 kgf/cm ²	0.00 ~ 10.00 kgf/cm ²	000 ~ - 735 ※1 mmHg	000 ~ 735 ※1 mmHg	000 ~ 735 ※1 mmHg
	Display cycle	Approx. 3 times/s					
	Display accuracy	maximum	± 0.5 %F.S. ± 2 counts (at 25 °C ± 5 °C)				
	Thermal error	ZERO maximum	± 0.1 %F.S./°C ± 2 counts	± 0.05 %F.S./°C ± 2 counts			± 0.1 %F.S./°C ± 2 counts
		SPAN	± 0.05 % Reading/°C ± 2 counts				
Resolution		1 count					
Additional function		Auto power off (3 min), Display hold, Battery replacement display					
	Accessories	Attachments : Half union (for a tube of φ 6 O.D.), and Barb fitting (for a tube of φ 4 I.D.), one piece each.					

※1 Measurement can be made up to “- 760 mmHg” for 102VH and up to “760 mmHg” for 102GH and 102AH (Accuracy not guaranteed beyond the rated pressure).


PG-100 HANDHELD DIGITAL MANOMETER

ENVIRONMENTAL CHARACTERISTICS


Test item	Test conditions (At 25 ± 5 °C)	Permissible change
Vibration	Amplitude 1.5 mm P-P, 10 ~ 55 Hz, 3 directions for 2 hours each (packed)	Indicating accuracy: ± 1 %F.S. maximum
Shock	98.1 m/s ² , 3 directions for 3 times each (packed)	
Pressure cycling	0 ~ Rated pressure, 10 ⁶ cycles	
Moisture resistance	40 °C, 90 ~ 95 %RH, 240 hrs.	
EMC	EMI: EN 55011 Group 1, class B EMS: EN 50082-1 (1992)	

OUTLINE DIMENSIONS

Unless otherwise specified, tolerance : ± 0.5 (Unit: mm)

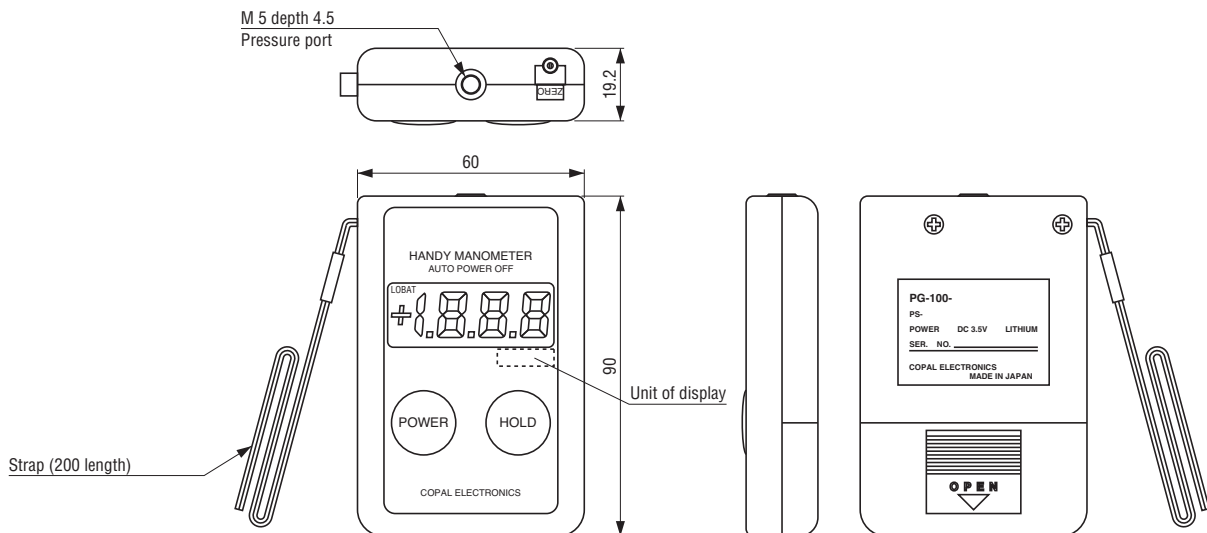

EXAMPLE OF APPLICATIONS

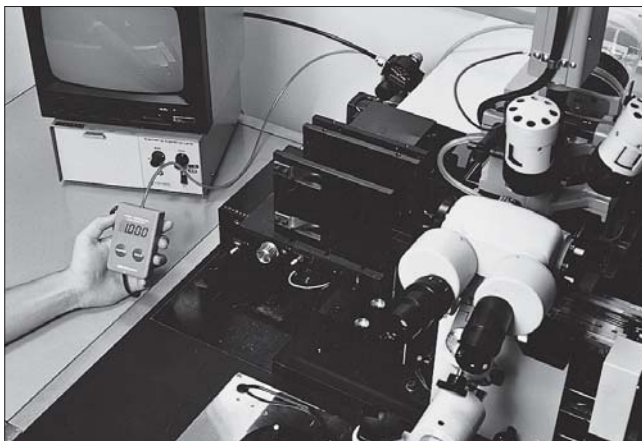

▲ Measurement of air pressure for a automatic machinery.



▲ Measurement of source pressure from a compressor.



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm