




ACCESSORIES

USB TO RS485 CONVERTER

- USB Connector Direct to Cable Data+ (A) and Data- (B) RS485
- Electronically controlled USB protocol on the cable.
- Communication Interface EIA/TIA-485 from low consumption.
- UART supports 7 or 8 data bits, 1 or 2 stop bits and parity even/impar/marca/space and without parity.
- Visual indication of Tx and Rx by means of LEDs in transparent connector.
- Transfer speed between 300 baud 3 MBPS.
- It has 2 cables to connect resistance of termination.
- X-On / X-Off software handshaking
- USB 2. compatible
- Operating Temperature -40°C to +85°C.
- Cable de 1.80m
- FCC and CE compliant
- RoHS Compliant



CODE: **USB-485-1800**

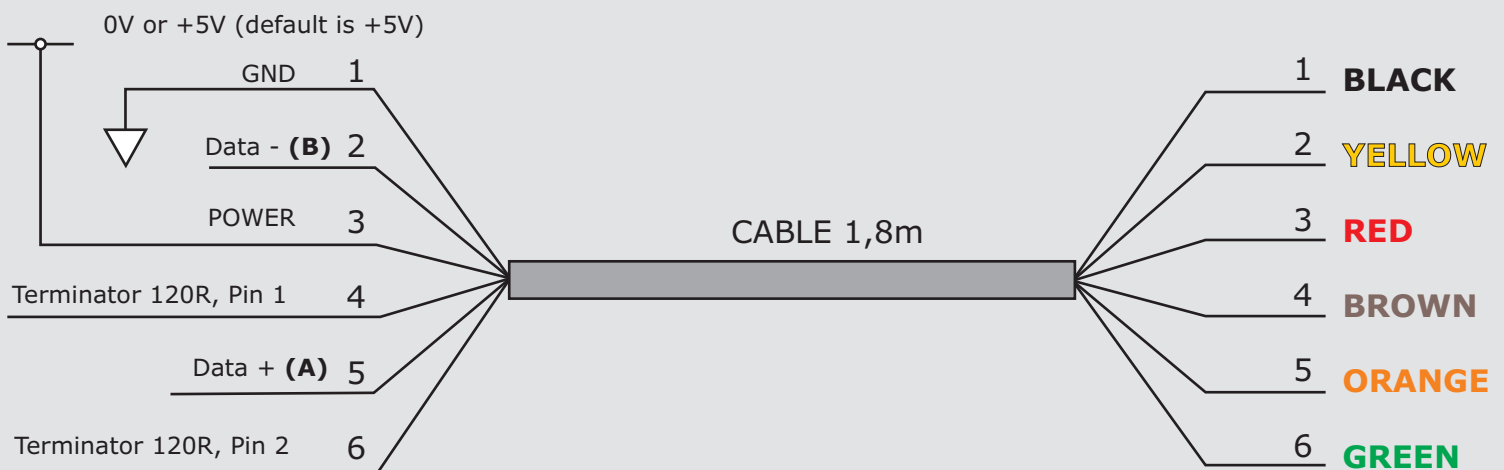

SISTEMA DE GESTIÓN ISO 9001:2015



GESTION DE LA CALIDAD
RI-9000-6174
Acreditado por OAA

SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

www.exemys.com