

Analog Acquisition Modules

RME2-PT



With RME2-PT, you can acquire temperatures from PT100 sensor. This variables can be read in five different ways simultaneously (Modbus TCP, Web Page HTTP, SNMP, CSV and XML).

★ FEATURES

8 analog differential inputs

- PT100 sensor temperature.

5 Protocols

- Modbus TCP (up to 8 simultaneous connections)
- WEB page (HTTP)
- SNMP (V1)
- CSV (HTTP)
- XML (HTTP)


✓ EXAMPLES OF USE

- Analog sensors general systems.
- Remote systems monitoring.
- SCADA and PLC systems.

📄 ORDERING INFORMATION

PART NUMBER	INPUTS	PROTOCOLS	SERIAL PORT
RME2-PT-100-00-80-IA3	8	See specifications	1 RS232

Analog Acquisition Module with multiple communication Protocols.

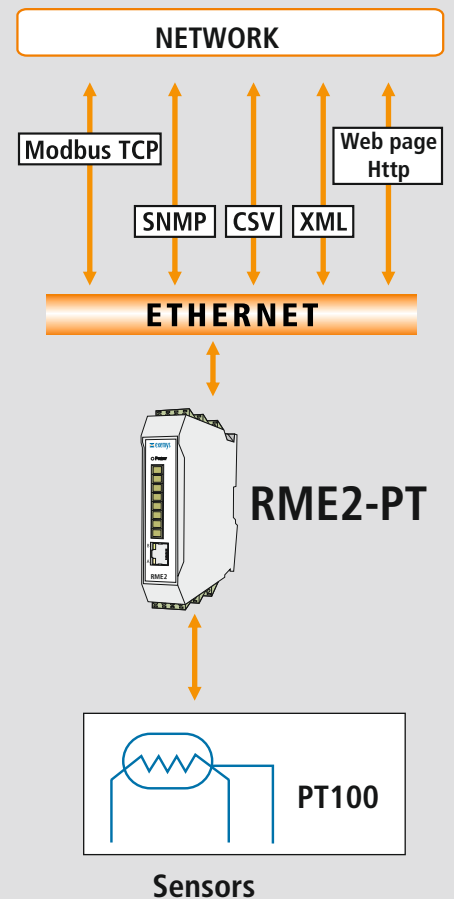

TECHNICAL FEATURES

- **Network Protocols** Modbus TCP, HTTP, DHCP, ICMP, ARP, SNMP.
Modbus RTU/ASCII (Gateway mode)

- **Network Interface** Ethernet 10BaseT, Connector RJ45

- **Serial port** 1 RS-232 in pluggable terminal blocks

- **Management** HTTP server, password protected.
Telnet Console, password protected.
RS-232 Serial console


- **Indicators** Power LED
Data LED
Alarm LED

- **Power Supply** 10 to 30 Vdc.
power consumption: 110mA max. with power supply of 12Vdc
60mA max. with power supply of 24Vdc

- **Dimensions** 100 mm x 22,5 mm x 112 mm (height x width x length).

- **Temperature** Operating temperature: -15 to 65 °C.
Storage Temperature: -40 to 75 °C.

- **Warranty / Support** 1 year.
Technical support included

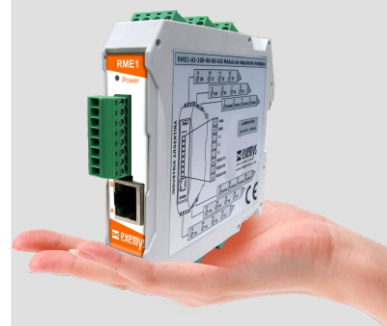

IEC 60950-1:2005+A1

Certificate of registration ISO 9001:2015

GESTION
DE LA CALIDAD

RI-9000-6174

Acreditado por OAA


www.exemys.com

For Technical support
support@exemys.com

For Sales
sales@exemys.com