

Analog Acquisition Modules

RME2-TC



With RME2-TC, you can acquire Temperatures from thermocouples. This variables can be read in five different ways simultaneously (Modbus TCP, Web Page HTTP, SNMP, CSV and XML).

★ FEATURES

8 analog differential inputs

- Thermocouple J,K,T,R,N,E,S.

5 Protocols

- Modbus TCP (up to 8 simultaneous connections)
- WEB page (HTTP)
- SNMP (V1)
- CSV (HTTP)
- XML (HTTP)

Gateway


- Includes Modbus TCP to Modbus Serial GATEWAY mode on RS232 port

✓ EXAMPLES OF USE


- Analog sensors general systems.
- Remote systems monitoring.
- SCADA and PLC systems.

📋 ORDERING INFORMATION

PART NUMBER	INPUTS	PROTOCOLS	SERIAL PORT
RME2-TC-100-00-80-IA3	8	See specifications	1 RS232

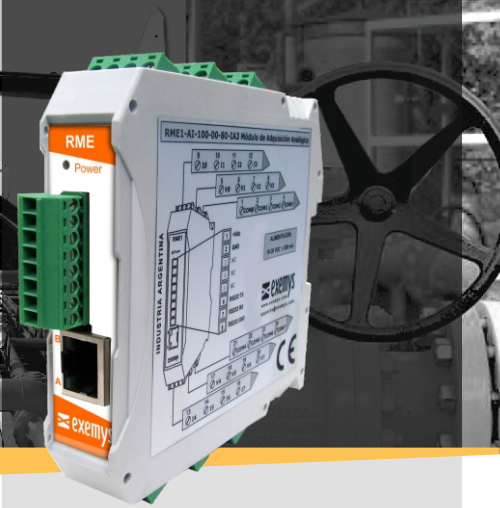


Analog Acquisition Module with multiple communication Protocols.

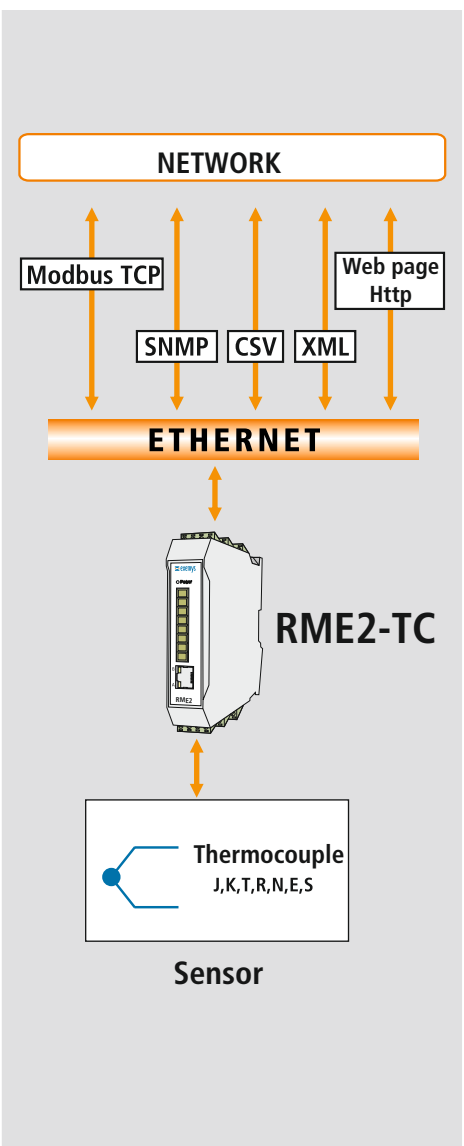

TECHNICAL FEATURES

• Network Protocols	Modbus TCP, HTTP, DHCP, ICMP, ARP, SNMP.
• Network Interface	Ethernet 10BaseT, Connector Rj45
• Serial port	Rs232 for Modbus TCP to Modbus Serial Gateway
• Managment	HTTP server, password protected. Telnet Console, password protected. RS-232 Serial console
• Indicators	Power LED Data LED Alarm LED
• Power Supply	10 to 30 Vdc. power consuption: 110mA max. with power supply of 10Vdc 60mA max. with power supply of 30Vdc
• Dimensions	100 mm x 22,5 mm x 112 mm (height x width x length).
• Temperature	Operating temperature: -15 to 65 °C. Storage Temperature: -40 to 75 °C.
• Warranty / Support	1 year. Technical support included

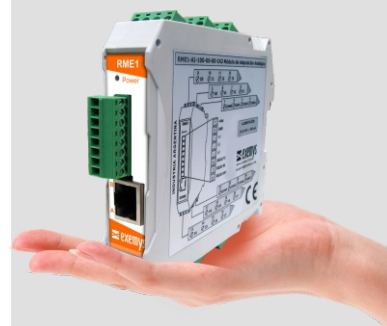

IEC 60950-1:2005+A1

certification ISO 9001:2015

GESTION
DE LA CALIDAD

RI-9000-6174

Acreditado por OAA


www.exemys.com

 For Technical support
support@exemys.com

 For Sales
sales@exemys.com