


# Float-Point™ AVX6

With Compact Junction Box



## Application

The general purpose level float switch package provides reliable, multi-point liquid level detection of relatively clean liquids such as water, diluted chemicals and light weight oils up to 8' (2.44m) with 1-5 reed switch outputs and a compact junction box for integral wiring termination. The stainless steel level float switch is selected for high temperature or pressure process tank level applications.

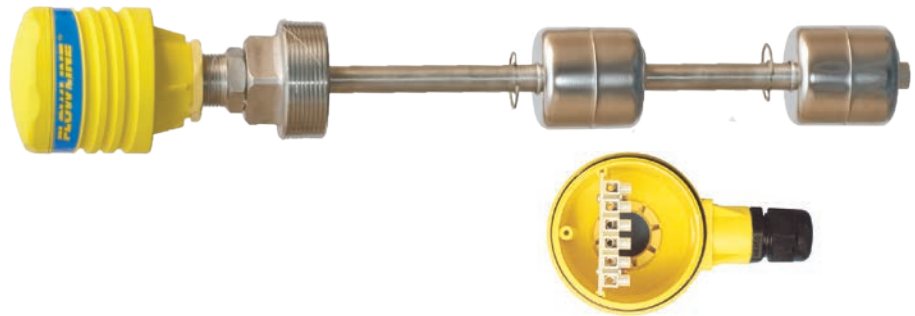

## Features

- Multi-point float level switch package for high temp and pressure
- 60VA dry contacts
- Rugged 316 stainless steel float, guide and process mounting plug
- Polypropylene enclosure rated NEMA 4X with swivel base for conduit alignment
- Assembled to your guide length and switch set point dimensions

## Key Benefits

- Mounts on the top of tank or sump
- Select from 1 to 5 switch points
- Each switch point connects directly to PLC/SCADA
- Ideal for high temperature, vapor and pressure applications

## Compatible Products



LC4X

### SWITCH-PRO™

Remote Level Controller

Available in general purpose classification, the level controller is offered in three configurations for pump and valve control. The LC40 accepts one level sensor input and provides one 10A relay. The LC41 accepts two level sensor inputs and provides one latching 10A relay for automatic fill or empty control. The LC42 accepts three level sensor inputs with one latching 10A relay output for automatic fill or empty control, and a second non-latching 10A relay for high level alarm or low level alarm. For field mount installation, add a single or dual indicator NEMA box.



### SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

# Float-Point™ AVX6


With Compact Junction Box



## Specifications

<b>Length:</b>	3" to 8' (7.6cm to 2.4m)
<b>Accuracy:</b>	± 3mm in water
<b>Repeatability:</b>	± 1 mm in water
<b>Specific gravity:</b>	0.55 minimum
<b>Orientation:</b>	± 20° vertical
<b>Switch points:</b>	1-5 (factory set)
<b>Contact type:</b>	SPST reed(s)
<b>Contact rating:</b>	240 VAC / VDC @ 60 VA
<b>Contact output:</b>	Normally open
<b>Process temp.:</b>	F: -40° to 392° C: -40° to 200°
<b>Ambient temp.:</b>	F: -40° to 140° C: -40° to 60°
<b>Installed height:</b>	6" (15.2 cm)
<b>Pressure:</b>	200 psi (13.8 bar)
<b>Enclosure rating:</b>	NEMA 4X (IP65)
<b>Enclosure mat.:</b>	PP, UL94VO
<b>Terminal strip:</b>	12-pole, socket
<b>Wire type:</b>	3-12 wire, #18 AWG
<b>Conduit entrance:</b>	1/2" NPT
<b>Wetted material:</b>	316 SS
<b>Process mount:</b>	2" NPT
<b>Classification:</b>	General purpose
<b>Compliance:</b>	CE, RoHS
<b>Approvals:</b>	UL

## Dimensions

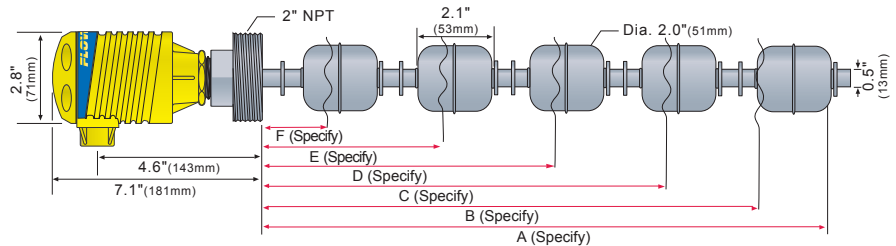

## Fittings

For optimum performance, install the level sensor using the below recommended or direct equivalent fittings.

	P/N	DESCRIPTION
	<b>LM52-2400</b>	3" NPT x 2" NPT (Sch. 40)
	<b>LM52-2800</b>	3" NPT x 2" NPT (Sch. 80)
	<b>LM52-3800</b>	4" NPT x 2" NPT (Sch. 80)
	<b>LM52-2410</b>	3" Socket x 2" NPT (Sch. 40)
	<b>LM52-3410</b>	4" Socket x 2" NPT (Sch. 40)
	<b>LM52-2810</b>	3" Socket x 2" NPT (Sch. 80)
	<b>LM52-3810</b>	4" Socket x 2" NPT (Sch. 80)
	<b>LM52-2890</b>	2" NPT Bulkhead Fitting, PVC
	<b>LM52-2850</b>	2" NPT Flange - 150# (Sch. 80)
	<b>LM50-1001</b>	2" NPT Bracket, Polypropylene

## Ordering

AV  6-5243  -  -  -  -  -

### NUMBER OF FLOATS

- 1 One Float
- 2 Two Floats
- 3 Three Floats
- 4 Four Floats
- 5 Five Floats

### DIMENSIONS (1) (2)

- A Specify
- B Specify
- C Specify (if applicable)
- D Specify (if applicable)
- E Specify (if applicable)
- F Specify (if applicable)

### NOTES

- Specify the applicable A, B, C, D, E dimensions at the end of the part number (ie: AV26-S243-70"-68"-10").
- The dimensions may be specified in 1/2" (1.3 cm) increments. The guide length or A-dimension may be specified from 4" to 96" (10cm to 2.4m). The float or B, C, D, E dimensions may be specified from 1.5" to 94.5" (3.8cm to 2.40m) with a minimum distance of 2.5" (6.3cm) between each dimension. To calculate the guide length adder, round up the A-dimension to the next inch (2.5cm), multiply it by \$10 per inch (2.5cm), and add that sum to the price.