
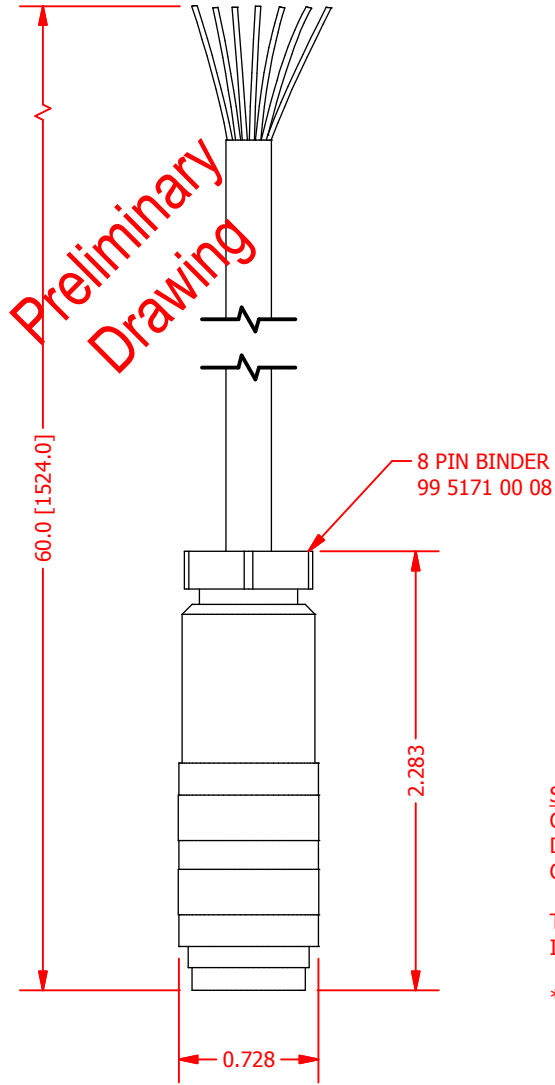


FUTEK MODEL ZCC992

8 Pin Binder w/ Cable Assembly For FUTEK Model IHH500

DRAWING NUMBER: F11359

INCH [mm] | R.O.= Rated Output

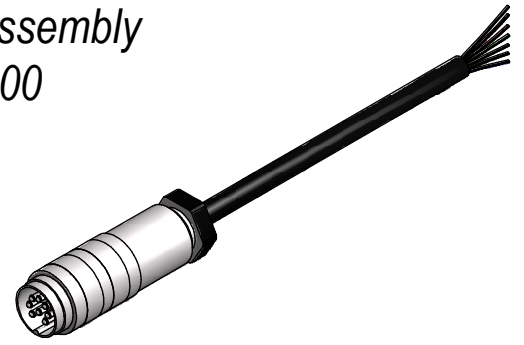


SPECIFICATIONS:

CABLE: 30 AWG, 10 CONDUCTOR BRAIDED SHIELDED POLYURETHANE
DIAMETER: 0.174 [4.4]
CABLE MINIMUM BEND RADIUS: 1.74 [44.2]

TEMPERATURE: -40° TO 176°F [-40° TO 80°C]
IP RATING: IP67*

*WHEN MATED WITH CONNECTOR

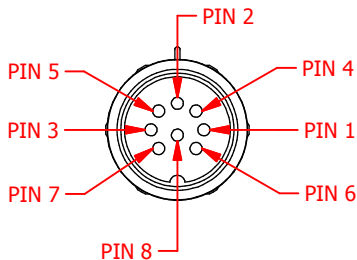

Pin	Color	Description
1	WHITE	ANALOG CURRENT OUTPUT
2	RED	ANALOG VOLTAGE OUTPUT RETURN
3	ORANGE	(+) SOLID STATE RELAY 1
4	GREEN	ANALOG VOLTAGE OUTPUT
5	YELLOW	(+) SOLID STATE RELAY 2
6	BLACK	ANALOG CURRENT OUTPUT RETURN
7	BLUE	(-) SOLID STATE RELAY 1
8	GRAY	(-) SOLID STATE RELAY 2



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from FUTEK

10 THOMAS
IRVINE, CA 92618 USA
1-800-23-FUTEK (38835)

INTERNET:
<http://www.futek.com>
SHEET 1 OF 1