

- Excitation


+ Excitation

+ Signal

- Signal

DONUT LOAD CELL w/ TEDS (IEEE1451.4) RECOGNITION AND DB9 MAIF

+OUTPUT

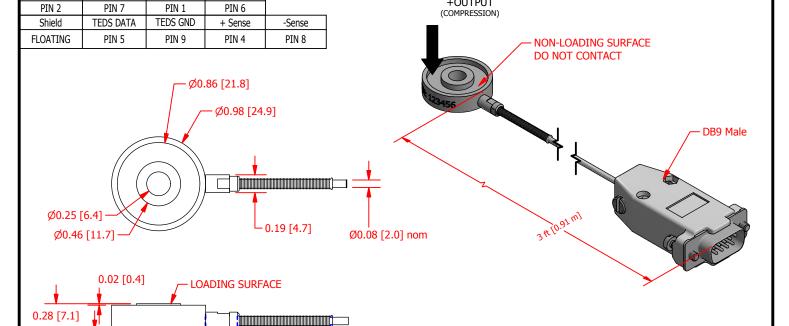

SPECIFICATIONS

0.01 [0.3]

SUPPORT OUTER RING

0.2 mV/V Nom. RATED OUTPUT CAPACITY 5 lb [22.2 N] SAFE OVERLOAD 150% of R.O. ZERO BALANCE ±30 % of R.O. EXCITATION (VDC OR VAC) 10 MAX **BRIDGE RESISTANCE** $700~\Omega$ nom **NONLINEARITY** ±1.0% of R.O. **HYSTERESIS** ±1% of R.O. **NONREPEATABILITY** ±0.5% of R.O.

0.89 [22.6]

±0.2% of R.O./°F (±0.36 of R.O./°C) TEMP. SHIFT ZERO $\pm 0.1\%$ of LOAD/°F (± 0.18 of LOAD/°C) TEMP. SHIFT SPAN


COMPENSATED TEMP. 60 to 90 °F (16 to 32 °C) -40 to 185 °F (-40 to 85 °C) OPERATING TEMP

WEIGHT (approx) 0.1 lb MATERIAL 17-4 PH S.S

CABLE Spiral Shielded Cable, 3 ft Long

CONNECTOR DB9 MALE

REVISIONS: (Refer to dwg # revision sheet)



DB9 FRONT SIDE VIEW SEE WIRING CODE TABLE FOR PIN OUTS





SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592 Tel: (65) 6561 0488 Fax: (65) 6562 0588 Email: sales@scigate.com.sg Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm

CUSTOMER APPROVAL- COMPANY:	OUTLINE DRAWING
CUSTOMER APPROVAL- NAME / DATE:	CTANDADD MOTEC: (Uplace Otherwise Specified)

STANDARD NOTES: (Unless Otherwise Specified)

ALL DIMENSIONS ARE IN INCHES DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M

DIMENSIONS ARE SHOWN AFTER PLATING

REMOVE BURRS AND BREAK SHARP EDGES .005 - .015 THREADS PER HANDBOOK H-28

3rd ANGLE PROJ



firm or individual without written permission from ANGLE: MODEL: + 1/2 CHAMFER:

±5°

TOLERANCE:

 $.X \pm 0.1'$ $.XX \pm 0.01"$

 $.XXX \pm 0.005'$

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be

divulged in whole or in part, by any

ADVANCED SENSOR TECHNOLOGY, INC. 10 THOMAS, IRVINE, CA 92618 USA Phone: (949) 465-0900 Fax: (949) 465-0905

DWG No.: DRAWN BY: 🗐 . CREATED DATE: 6 APPROVED BY: J. Vargas APPROVED DATE: 7/9/2014 CHECKED BY: CAGE: 1X8M6 SHEET: 1 OF 1