




APPLICATION SUMMARY

Brake pads and scratch resistant coatings require an understanding of their friction coefficient and useful life. This requires a tribometer to characterize these material properties. By incorporating a multi-axis load cell into the tribometer, high accuracy measurements of friction and material life can be achieved.

PRODUCTS IN USE

1 MBA500 Torque and Thrust Biaxial Sensor paired with Instrumentation (USB220, IDC305, IAA Series Amplifiers)

All FUTEK application illustrations are strictly conceptual. Please contact us with questions.

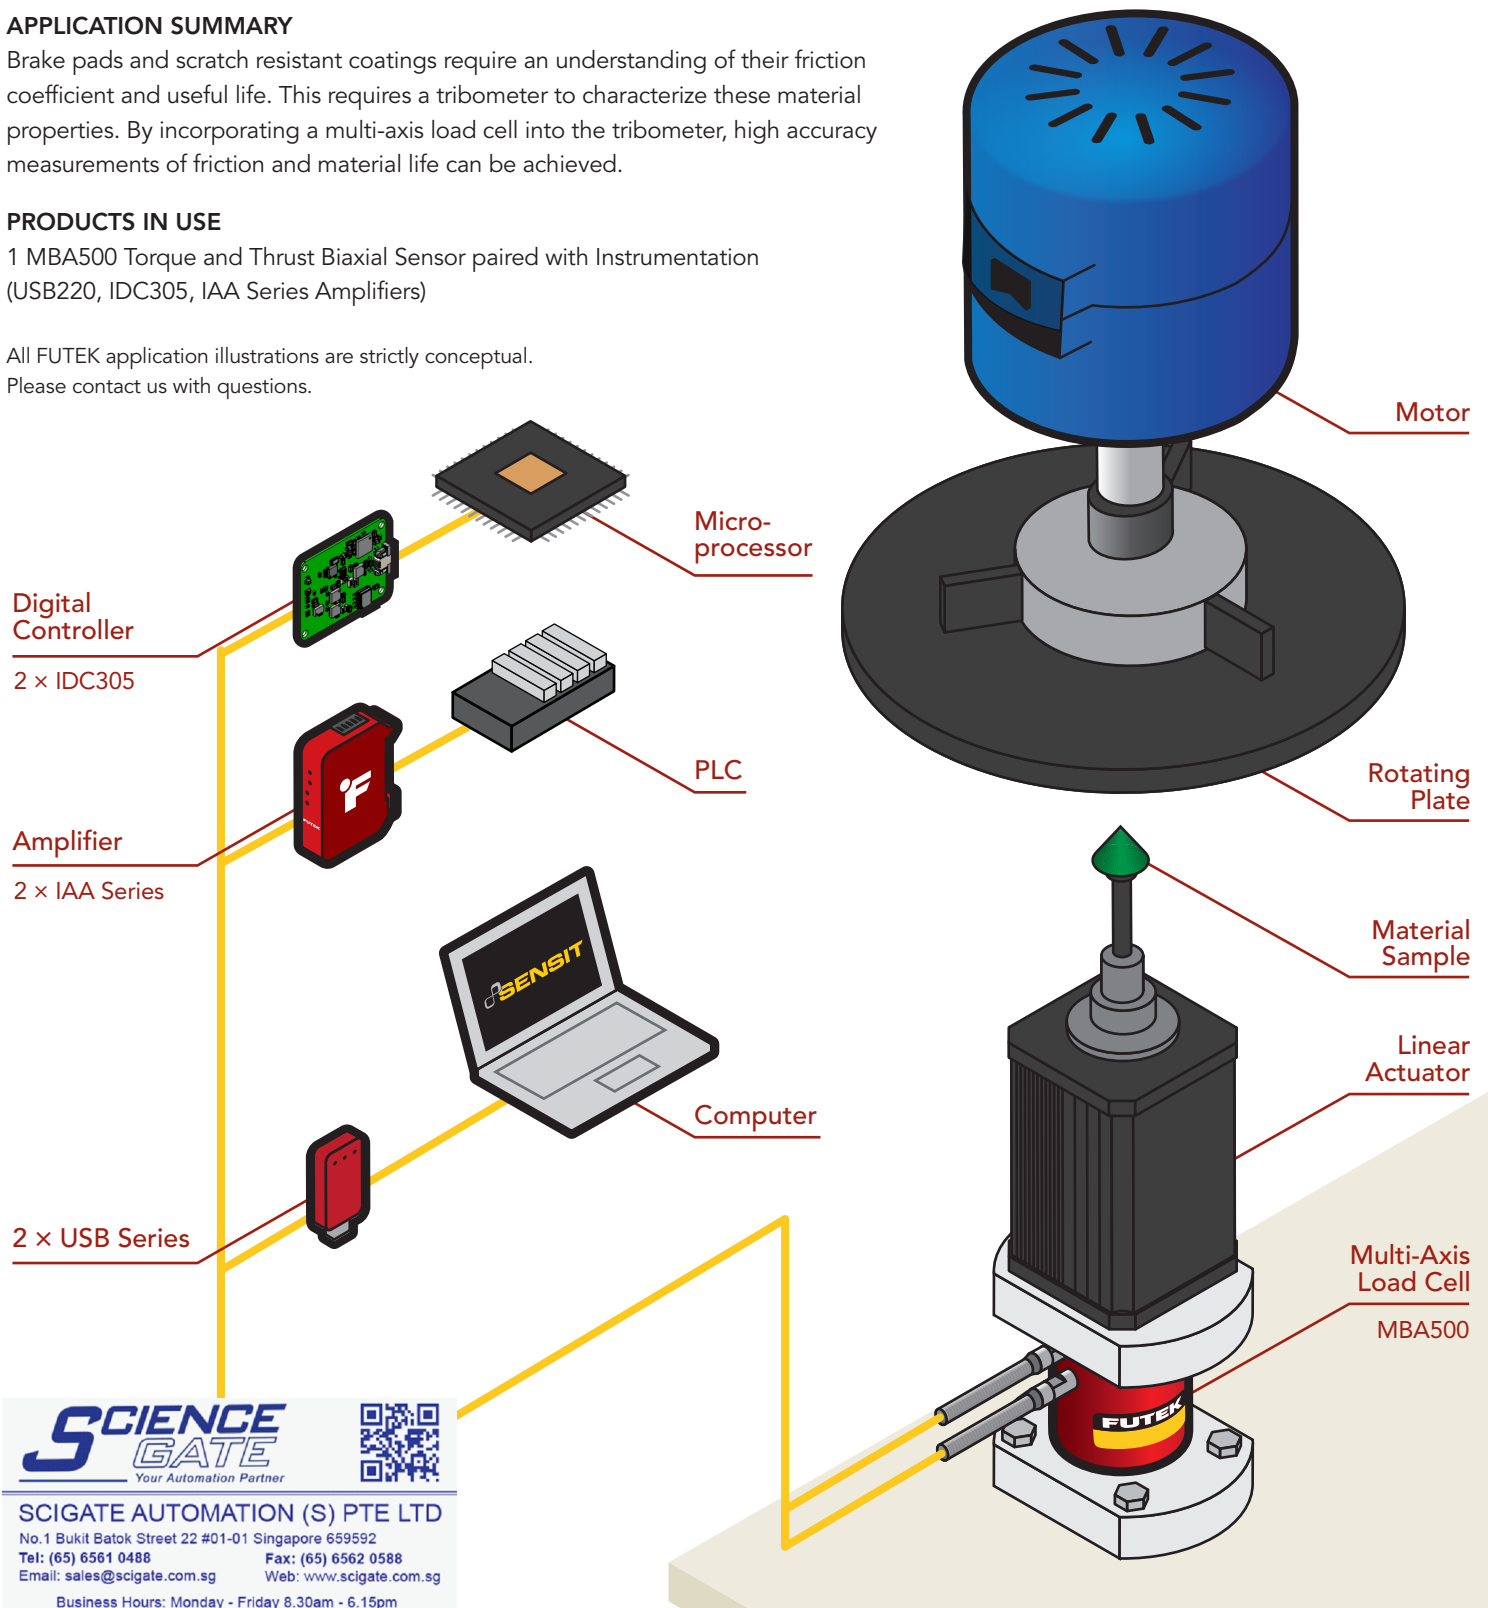

SCIENCE GATE
Your Automation Partner

SCIGATE AUTOMATION (S) PTE LTD
No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm

Sensor Solution Source
Load · Torque · Pressure · Multi Axis · Calibration · Instruments · Software

www.futek.com

