


# FUTEK MODEL QLA383-TPS

## Low Profile Portable Calibration Tripod

ITEM NUMBER: TPS01020

INCH [mm] | R.O.= Rated Output

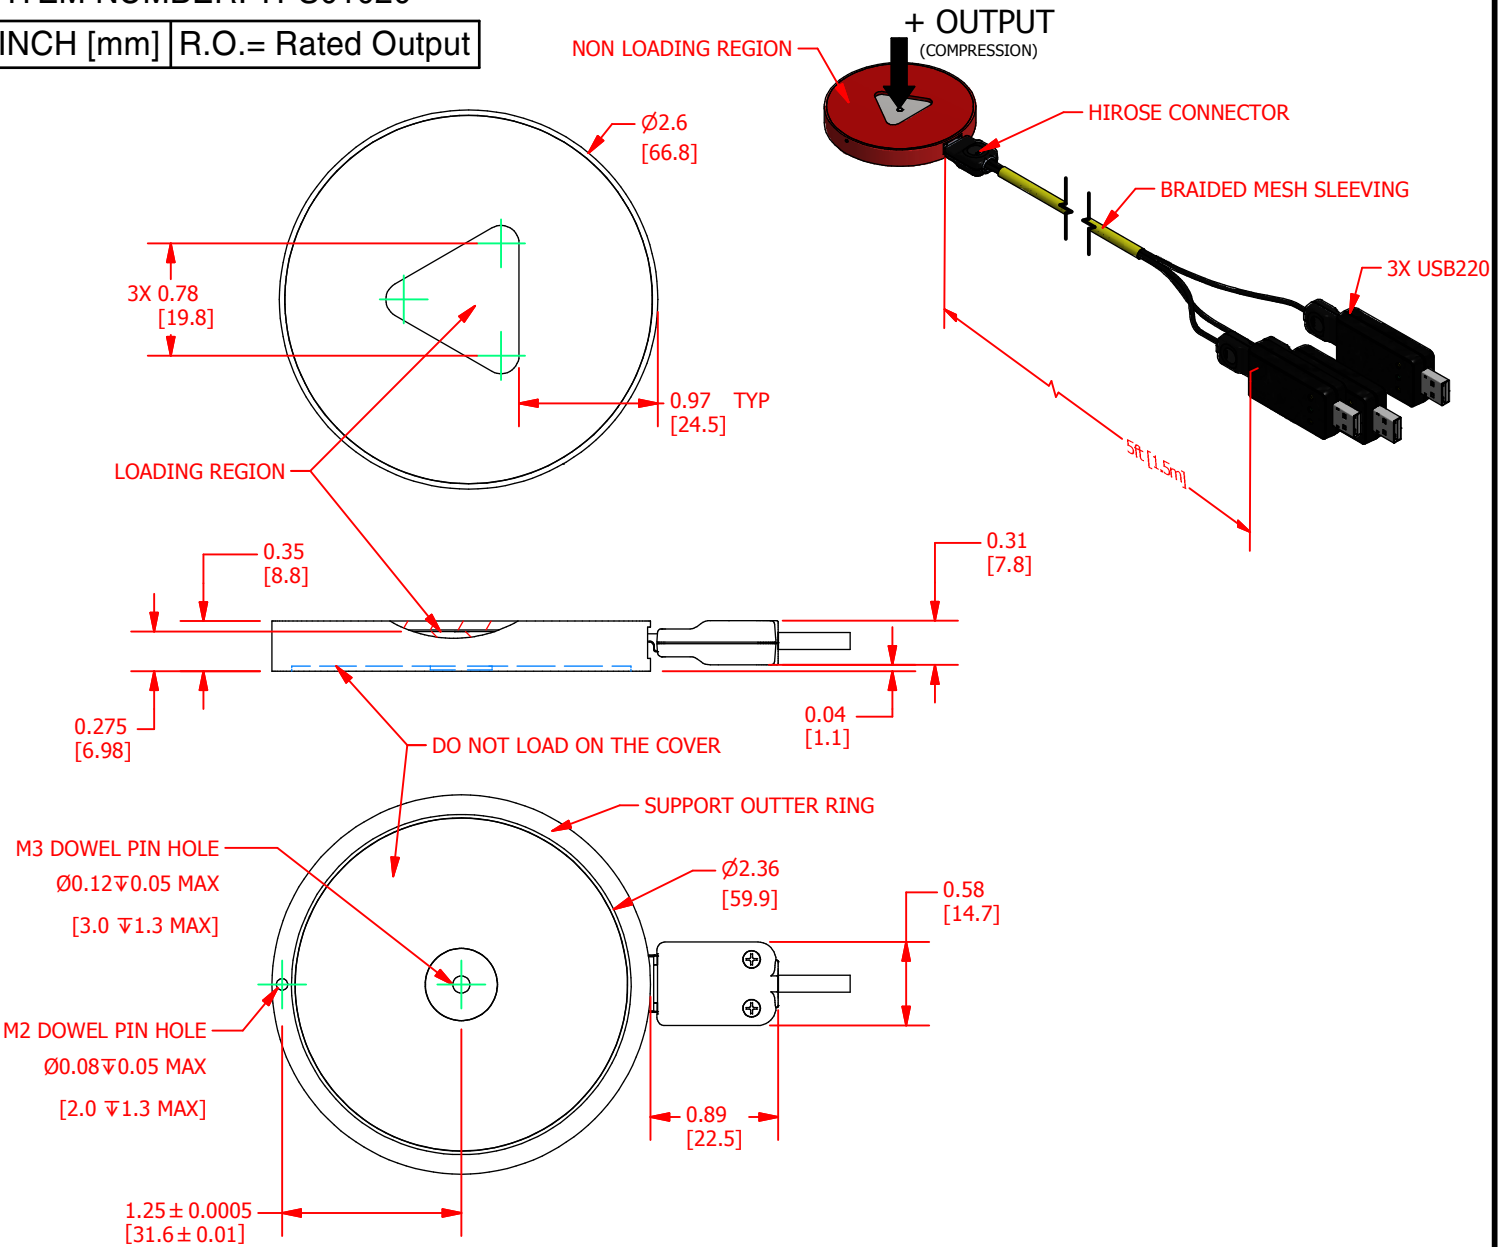

### SPECIFICATIONS:

OUTPUT	USB2.0
CAPACITY	1000 g
RESOLUTION	0.01 g
MAXIMUM LOAD	2000 g
WEIGHT (approx)	90 g
MATERIAL	Aluminum

CABLE: 3x 29 AWG Spiral Shielded Silicone, 5 ft [1.5 m] Long



**SCIGATE AUTOMATION (S) PTE LTD**  
 No.1 Bukit Batok Street 22 #01-01 Singapore 659592  
 Tel: (65) 6561 0488 Fax: (65) 6562 0588  
 Email: sales@scigate.com.sg Web: www.scigate.com.sg  
 Business Hours: Monday - Friday 8.30am - 6.15pm

CUSTOMER APPROVAL- COMPANY:
CUSTOMER APPROVAL- NAME / DATE:
REVISIONS: (Refer to dwg # revision sheet)

## OUTLINE DRAWING

STANDARD NOTES: (Unless Otherwise Specified)  
 ALL DIMENSIONS ARE IN INCHES  
 DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M  
 REMOVE BURRS AND BREAK SHARP EDGES .005 - .015  
 THREADS PER HANDBOOK H-28  
 DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE: ± 1/2°  
 CHAMFER: ± 5°  
 TOLERANCE:  
 .X ± 0.1"  
 .XX ± 0.01"  
 .XXX ± 0.005"

3rd ANGLE PROJ.

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:

**FUTEK**  
 ADVANCED SENSOR TECHNOLOGY, INC.  
 10 THOMAS, IRVINE, CA 92618 USA  
 Phone: (949) 465-0900  
 Fax: (949) 465-0905

MODEL: <b>QLA383-TPS</b>	DWG No.: <b>FO1385</b>
DRAWN BY: M. Lisiak	CREATED DATE: 2/2/2015
APPROVED BY: J. Vargas	APPROVED DATE: 2/2/2015
CHECKED BY: E. Pano	CAGE: 1X8M6 SHEET: 1 OF 1