




VARIATIONS			
ITEM #	LENGTH [FT]	CABLE	SPECIFICATIONS
FSH03678	5	28 AWG, 4 conductor braided shielded clear PVC  Diameter: 0.115 in [2.9 mm]  Cable Minimum Bend Radius: 1.15 in [29.2 mm]	Temperature: -40 to 176°F -40 to 80°C  IP RATING: IP50
FSH03679	10		
FSH03680	15		
FSH03681	20		
FSH03682	30		
FSH03683	50		
FSH03684	100		
FSH03685	200		

**FEATURES**

- Simplifies integration with USB220 and USB320
- High stranded, braided shielded, flexible PVC cable
- 12-pin cable assembly

WIRING CODE (WC1)		
COLOR	PIN #	CODE
GREEN	1	+ SIGNAL
WHITE	2	- SIGNAL
RED	11	+ EXCITATION
BLACK	12	- EXCITATION / SHIELD

**DIMENSIONS** inches [mm]

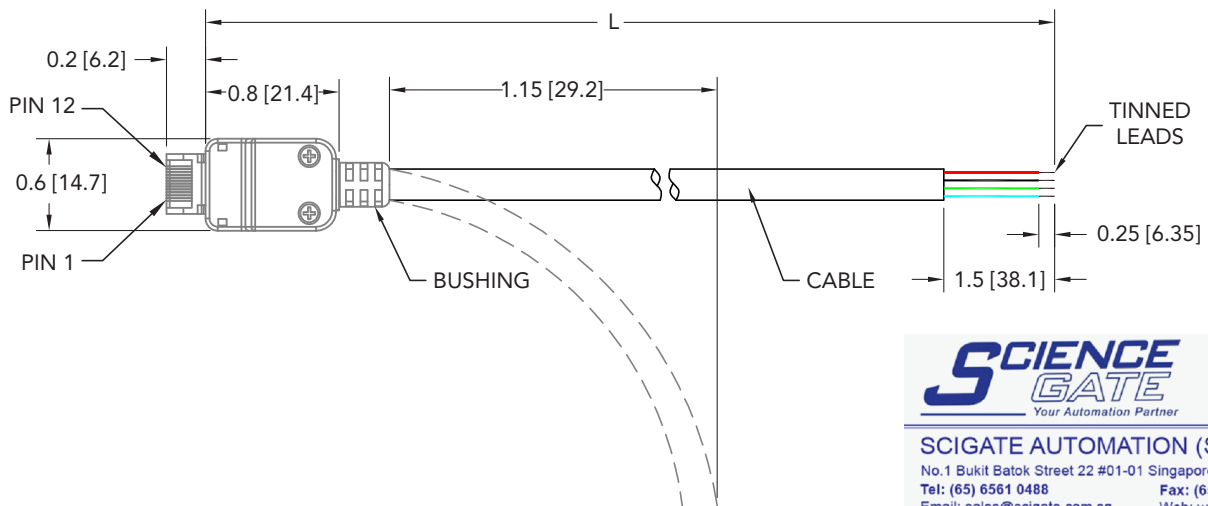

**SCIGATE**  
Your Automation Partner

**SCIGATE AUTOMATION (S) PTE LTD**  
No.1 Bukit Batok Street 22 #01-01 Singapore 659592  
Tel: (65) 6561 0488 Fax: (65) 6562 0588  
Email: sales@scigate.com.sg Web: www.scigate.com.sg  
Business Hours: Monday - Friday 8.30am - 6.15pm



Drawing Number: FI1346-B

FUTEK reserves the right to modify its design and specifications without notice. Please visit <http://www.futek.com/salesterms> for complete terms and conditions.

10 Thomas, Irvine, CA 92618 USA

Tel: (949) 465-0900  
Fax: (949) 465-0905

[www.futek.com](http://www.futek.com)



U.S. Manufacturer