

SMALL ROTARY PADDLE TYPE LEVEL SWITCH

LEMICON-S


Palm-size for small tank!



High quality and lightweight as well as
high performance and budget price!

LEMICON-S SMALL ROTARY PADDLE TYPE LEVEL SWITCH

Compact and low price with high performance and quality!!

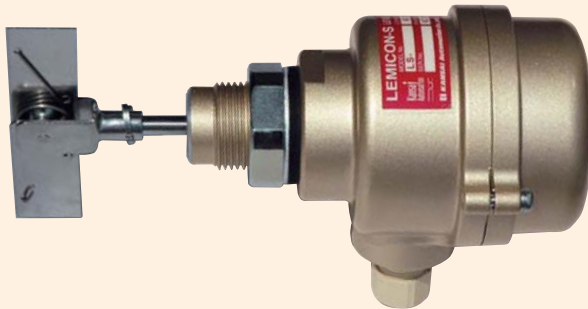

Working principle






A detection paddle inside the tank is turned by synchronous motor, the paddle is arrested to rotate by a load of the object to be measured. An actuator fixed on the motor activates a limit switch to stop the motor, providing a detection signal.

Specifications

- Power supply : 100 or 110 or 200 or 220VAC (50/60Hz)
- Contact rating : 250VAC 3A (Resistance Load, SPDT)
- Paddle revolution : 0.83rpm (50Hz) /1.00rpm (60Hz)
- Direction of rotation : Clockwise (Viewing From Paddle)
- Power consumption : 1.5W
- Temperature range : 0~50°C (Neither condensed nor frozen)
Heat resistant type 0~120°C
- Withstand voltage : 1500VAC for one minute
- Operation torque : 170~270N·m×10⁻⁴
- Color : Gold
- Set screw : G 3/4 (Material ADC)
- Locknut : Hexagonal nut (Material ADC)
- Cable length : 500mm (MAX)
- Enclosure Rating : IP67

*Wetted parts of stainless steel available


No removal of paddle, just folding the paddle makes installation easy.

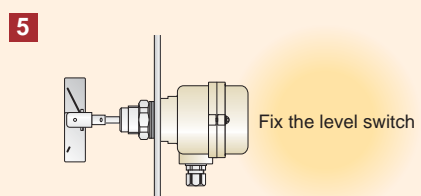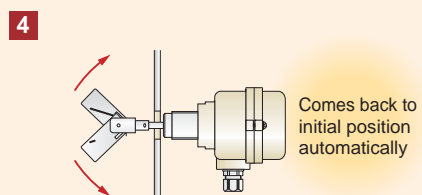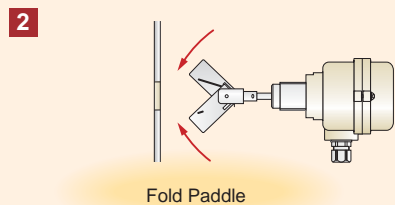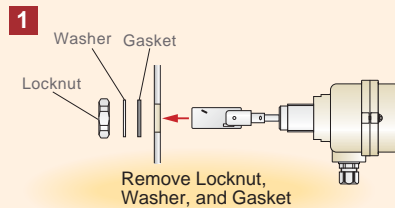

OUTLINE DRAWING

STANDARD TYPE


model LS

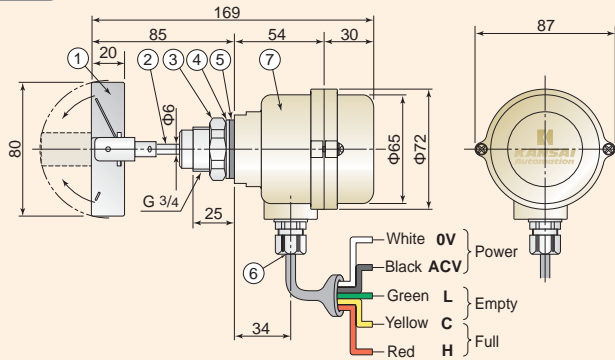

No.	Parts name	Material
1	Unfolding paddle	304SS
2	Shaft	304SS
3	Locknut	ADC
4	Washer	ALP
5	Gasket	NBR
6	Wire outlet	PVC
7	Case	ADC

SQUARE FLANGE TYPE *Wetted parts of stainless steel available


model LS-K

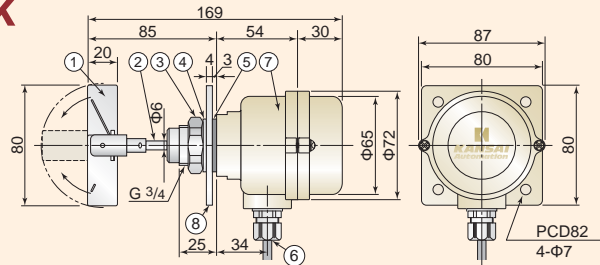

No.	Parts name	Material
1	Unfolding paddle	304SS
2	Shaft	304SS
3	Lock nut	ADC/304SS
4	Washer	ALP/304SS
5	Gasket	NBR
6	Wire outlet	PVC
7	Case	ADC
8	Flange	ALP/304SS

STANDARD TYPE (Wetted parts of stainless steel)


model LS

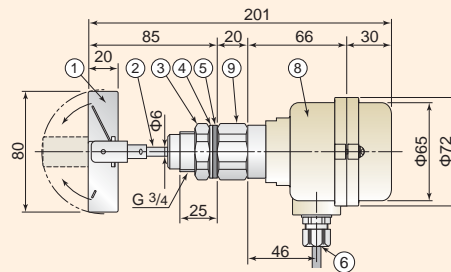

No.	Parts name	Material
1	Unfolding paddle	304SS
2	Shaft	304SS
3	Locknut	304SS
4	Washer	304SS
5	Gasket	NBR
6	Wire outlet	PVC
7	Case	ADC
8	Socket	304SS

EXTENSION PIPE TYPE *Wetted parts of stainless steel available

model LS-S

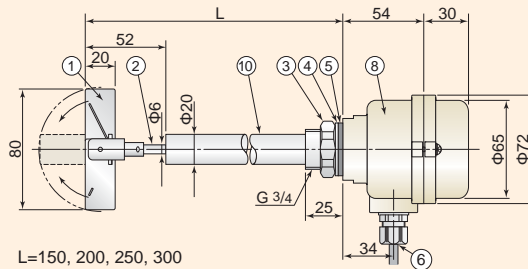


L=150, 200, 250, 300

No.	Parts name	Material
1	Unfolding paddle	304SS
2	Shaft	304SS
3	Locknut	ADC/304SS
4	Washer	ALP/304SS
5	Gasket	NBR
6	Wire outlet	PVC
7	Case	ADC
8	Extension pipe	AL/304SS

HEAT-RESISTANT TYPE *Wetted parts of stainless steel available

model LS-H

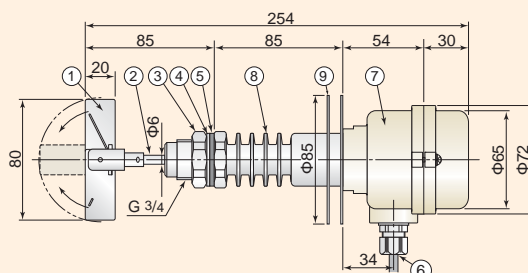

No.	Parts name	Material
1	Unfolding paddle	304SS
2	Shaft	304SS
3	Locknut	ADC/304SS
4	Washer	ALP/304
5	Gasket	Silicon
6	Wire outlet	PVC
7	Case	ADC
8	H joint	A C
9	Radiation fin	ALP

DESIGNATION OF MODEL

LS-□□-□

Power Supply

- 1 100~110V AC
- 2 200~220V AC

Shape of Detection Part

- Blank Standard
- S Extension Pipe Type
- H Heat-resistant

Process Connection

- Blank Set Screw
- K Flange


Small Rotary Paddle Type Level Switch



with OPERATION LAMP
(LED, option)

EXAMPLE OF MOUNTING METHOD

Select a Correct Type of Model and Process Connection

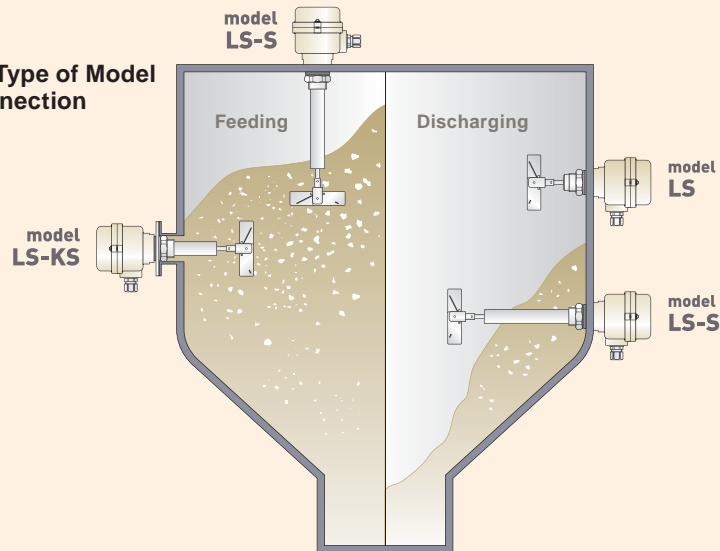

Line of business

- Rotary Paddle Type Level Switch
- Vibration Type Level Switch
- Swing Type Level Switch
- Acoustic Level Switch
- Capacitance Type Level Switch
- Capacitive Proximity Sensor
- Capacitance Type Level Indicator
- Diaphragm Type Level Switch
- Tiit Switch
- Leak Type Level Switch
- Microwave Switch
- Sounding Bob Type Level Indicator
- Flow Switch
- Conductance Type Level Switch
- Float Switch
- Float Type Level Indicator
- Ultrasonic Type Level Indicator
- Equipments For Conveyor Lines
- Dust Monitor System
- Zirconia Oxygen Analyzer
- Laser Type Level Indicator
- RADAR Type Level Indicator
- On-line Sensors for Accurate Liquid Analysis
- Ultrasonic Flow meter

*Please be sure to read USER'S GUIDE, Installation & Operation Instructions before using the instrument.

*The specifications herein may be subject to change without advance notice.

All-round Manufacturer of Level Controllers for Powder, Granules and Liquid

KANSAI Automation Co., Ltd.

Headquarters:

2-14, Togano-cho, Kita-ku, Osaka 530-0056, Japan
TEL.81-6-6312-2071 FAX.81-6-6314-0848
e-mail: infoe@kansai-automation.co.jp

<http://www.kansai-automation.co.jp>



official site



Tokyo Branch: 1-29-6, Hamamatsu-cho, Minato-ku, Tokyo 105-0013, Japan
TEL. 81-3-5777-6931 FAX. 81-3-5777-6933

Nagoya Office: 3-10-17, Uchiyama, Chigusa-ku, Nagoya464-0075, Japan
TEL. 81-52-741-2432 FAX. 81-52-741-1588

Kyushu Office: 1-1-21, Komemachi, Kokura Kita-ku, Kitakyushu802-0003, Japan
TEL. 81-93-511-4741 FAX. 81-93-511-4580

Agent

SCIENCE GATE
Your Automation Partner



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm