

Pro-face

by Schneider Electric

SP5000 Series

Wireless LAN Model

Easy Wireless in Tough Environments



Enhance data management and maintenance efficiency with just this display.

Easy to install wireless

Wireless device networking centralizes information management.

Reduce cable-wiring time


Easily add equipment to your existing lines, and change layouts without rewiring.

Improve debugging efficiency

Check device status without any cables, away from control panels located in rough environments.

Remote monitoring with a tablet

Use Pro-face Remote HMI without changing existing systems.

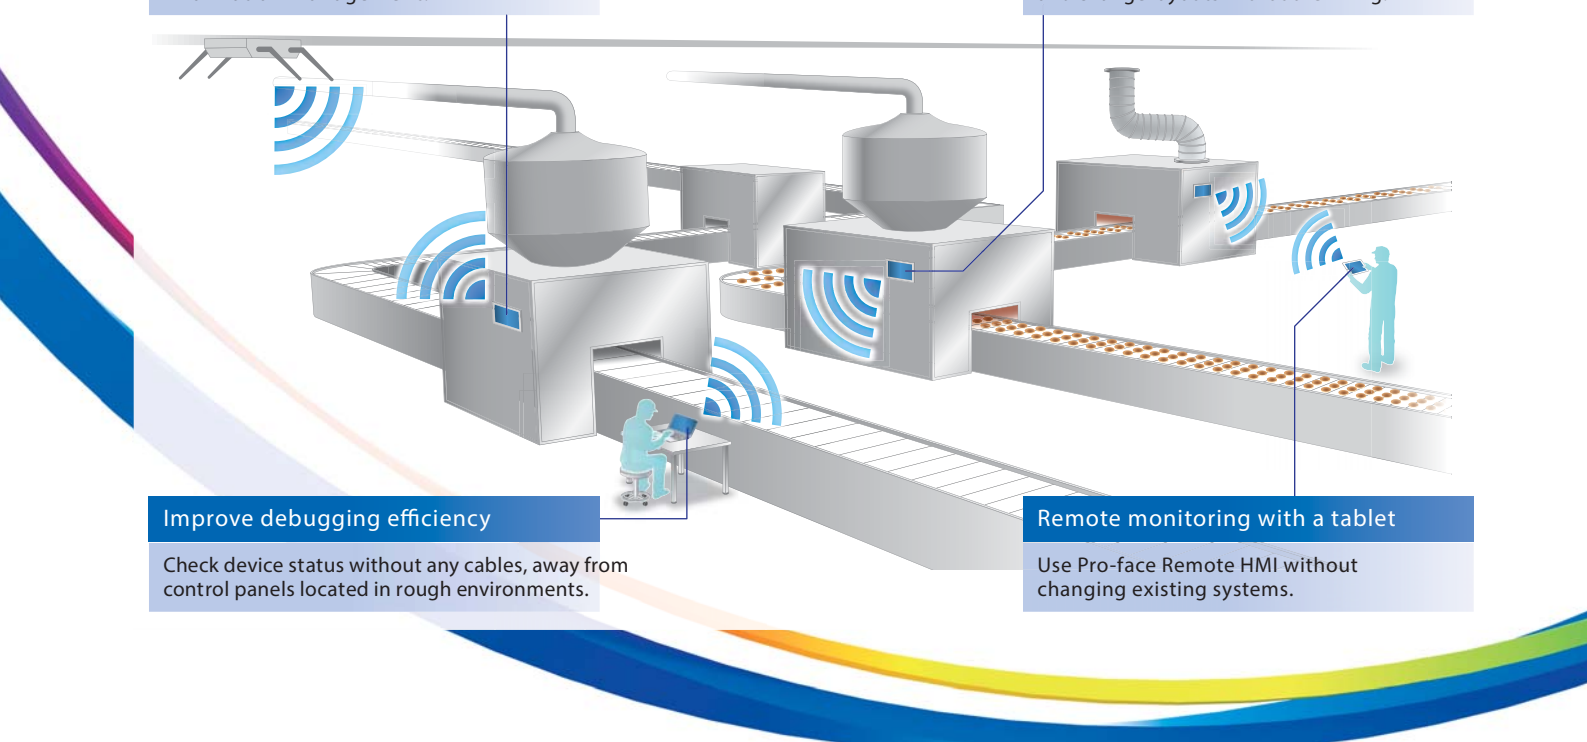

Portable SP5000 series

Using Pro-face Remote HMI allows you to check device information anywhere on your tablet or smartphone.

Improved debugging efficiency

Wireless debugging need not open the console. Able to debug programs of PLC compatible with the pass-through feature and transfer screens without cables.

Connect to your existing network

Selecting the client mode allows you to connect to your existing wireless network. You can easily modify line layout to improve production efficiency.

Pro-face Remote HMI
Remote Monitoring Software for mobile



Display Module + Box Module Combination and Specifications

Premium Display (Wireless LAN Model) SP-5660TP



Model No.
PFXSP5660TPD

Specifications Summary

Display Size	12" 1,024 x 768 pixels (XGA)
Display Colors	TFT 16 million colors
Touch Panel	Resistive Film (analog, multi-touch)
USB	USB Type A x 1, USB mini-B x 1
Auto Scaling	Yes
Brightness Sensor	Yes
Structure	IP65F, IP67F, Type 1,*1

Wireless LAN

Standards	IEEE802.11b/IEEE802.11g/IEEE802.11n
Frequency Bandwidth	2.4 GHz
Channel Bandwidth	20 MHz
Channel	In Access Point Mode (1...11 ch)*2 Client mode*3 •North America : 1...11 ch •Japan : 1...13 ch •Europe : 1...13 ch •Korea : 1...13 ch •China : 1...13 ch •Taiwan : 1...11 ch
Transmission Speed	IEEE802.11b : max 11 Mbps IEEE802.11g : max 54 Mbps IEEE802.11n : max 72.2 Mbps
Action Mode	Client mode / Access Point mode
Communication Mode	Infrastructure
Network Authentication	Open, WPA-Personal, WPA2-Personal
Data Encryption	WEP (128 bit) (Open)*4 AUTO/TKIP (WPA-Personal) AES (WPA2-Personal)
Maximum Client Connections	10
Connection angle and distance	Only the display side is connectable. The enabled connectivity angle and distance depend on your operating environment, applications to be used, and a communication target device. Be sure to conduct operation check including directionality in your operating environment before use.



Open Box SP-5B40



Model No.
PFXSP5B40

Specifications Summary

Serial	RS-232C / 422 / 485 x 2
Ethernet	10BASE-T / 100BASE-TX / 1000BASE-T x 2
Memory Card	CFast x 2, SD Card x 1
USB	USB Type A x 3, USB mini-B x 1
Video	DVI-D OUT x 1
Sound	Sound Input x 1, Sound Output x 1
AUX Output	Alarm Output / Buzzer Output x 1

Environmental Specifications

Surrounding Air Temperature	0...60 °C (32...140 °F)
-----------------------------	-------------------------

*1: For the IP66F and the Type 4X (indoor use only) /13, when using a front USB cover as an option.

*2: In Access Point mode, IEEE802.11d is not supported.

*3: If the surrounding access points do not support IEEE802.11d, channels are limited from 1 to 11ch.

*4: In Access Point mode, WEP is not supported.

⚠ WARNING

HAZARD OF OPERATOR INJURY, OR UNINTENDED EQUIPMENT DAMAGE

Before operating any of these products, be sure to read all related manuals thoroughly.

Failure to follow these instructions can result in death, serious injury or unintended equipment damage.

- For printing purposes, the colors in this catalog may differ from those of the actual unit.
- Actual user screens may differ from the screens shown here.
- Electric equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Digital for any consequences arising out of the use of this material.

- All product names used in this catalog are the registered trademarks or trademarks of their respective companies.
- All information contained in this catalog is subject to change without notice.



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm



Visit our website for more information.

www.proface.com

Global Headquarters
Digital Electronics Corporation
[JAPAN] Tel: +81-(0)6-6208-3133

North/South American Headquarters
Pro-face America, Inc.
[U.S.A.] Tel: +1-734-477-0600

European Headquarters
Pro-face Europe B.V.
[THE NETHERLANDS] Tel: +31 (0)23 55 44 099

[AUSTRALIA] Tel: +61 (0)3 9550 7396
[DENMARK] Tel: +45 70 22 01 22
[GERMANY] Tel: +49 (0)212 258 260
[ITALY] Tel: +39 0362 59 96 1
[SOUTH KOREA] Tel: +82 (0)2-2630-9850
[SWITZERLAND] Tel: +41 (0)43 343 7272
[SINGAPORE] Tel: +65-6832-5533

[AUSTRIA] Tel: +43 7236 3343 620
[ENGLAND] Tel: +44 (0)2476 511288
[INDIA] Tel: +91 80 4333 3540
[POLAND] Tel: +48 22 465 66 62
[SPAIN] Tel: +34 (0)93 846 07 45
[TAIWAN] Tel: +886-(0)2-2657-1121

[CHINA] Tel: +86-(0)21-6361-5175
[FRANCE] Tel: +33 (0)1 60 21 22 91
[INDONESIA] Tel: +62 21 750 4496
[RUSSIA] Tel: +7 (812)336 47 06
[SWEDEN] Tel: +46 46 540 90 70
[THAILAND] Tel: +66-(0)2-617-5678