

Industrial PC Flat Panel Monitor

Industrial Panel / Built-in PC

PS4000 Series

Industrial Built-in PC

PE4000B Series

Flat Panel Monitor

FP5000 Series



Industrial PC

■ PS4000 Series

The PS4000 Series offers extensive connectivity, high performance, energy efficient processor options, and quick and easy storage expansion.

Type	19", 15", 12" or Built-in
CPU	Core™ 2 Duo P8400 or Atom™ N270
RAM	2 to 8GB (Core™ 2 Duo) or 1 to 3GB
Supported OS	Windows XP, Windows 7, WES2009 or WES7
Storage	CF, HDD or SSD



■ PE4000B Series

The highly compact PE4000B is the entry level product to Pro-face Industrial PC quality and performance.

Type	Built-in
CPU	Atom™ N2600, N270
RAM	2GB or 4GB
Supported OS	WES2009, WES7



Industrial Flat Panel Monitor

■ FP5000 Series

Supporting the trend for more efficient operation, an analog resistive multi touch panel and automatic brightness adjustment has been added to the FP5000 Series thus supporting convenient operation in industrial environments.

Type	15" or 12"
Supported OS	Windows XP, Windows 7, Windows 8.1, WES2009 or WES7
Video Input	DVI-D



Software

Pro-face Remote HMI
Remote Monitoring Software for mobile

Monitors and controls HMI screens on a smartphone or a tablet. Pro-face Remote HMI Server is the software to operate Windows app. via the Pro-face Remote HMI.

Pro-ServerEX
Data Management Software

Provides data connectivity and reporting functionality.

WinGP
HMI Runtime Engine for PC

Runs screen data created for Pro-face HMI on GP-Pro EX software on a Windows PC.

Application

Enterprise Network



For detailed specifications, visit our website.
<http://www.pro-face.com/product/soft/index.html>



PS4000 Series

Choose the suitable CPU, OS & storage to meet your requirements.



Dependability

■ Disk-less System for Secure Operation

SSD, CFast** or CF Card with Embedded OS provides stable operation even in locations subject to vibration or shock.

** PS-4600 only



(Image of PS-4700 Embedded model)

■ Increased Parts Life Time

A large-size heat sink and intelligent fan control reduce load on the components.*

* Fan-less models with extended maintenance cycle and low energy consumption.



(Image of PS4800 or PS4700 Model)

■ For Sites Where Uninterrupted PC Operation is Required

All models can be used continuously for 24 hours including those equipped with a hard disk drive.

■ For Stable OS Shutdown Anywhere

UPS (Uninterruptible Power Supply) is available.



(Image of PS4800 or PS4700 Model)

Reassurance

■ Operating System with Long-Term Supply

A licensing agreement with Microsoft allows us to provide a long-term supply of the product. Windows® XP Professional embedded can be also supplied by 31 Dec. 2016.

■ Fan-less Model with Lower Operating Noise

The PS-4600 units without HDD do support fan-less operation. All PS4000 Series with Atom™ CPU don't require a fan as well.

Maintainability

■ Easily Replaceable HDD Drive

The cartridge type HDD/SSD allows easy replacement.




Sliding expansion Slot (Slide-in Slot)

HDD/SSD Slot (Slide-in Disk)

(Image of PS4800 or PS4700 Model)

■ Easily Replaceable Fan

A fan kit is provided as a maintenance product to enable easy replacement by the customer.




PE4000B Series

Highly compact IPC empowering your applications




■ Various interfaces for transparent production processes

COMx6 (max.), Ethernetx3 (max.), USBx5 (max.), 8 points (selectable I/O). Connect to multiple devices at a time.

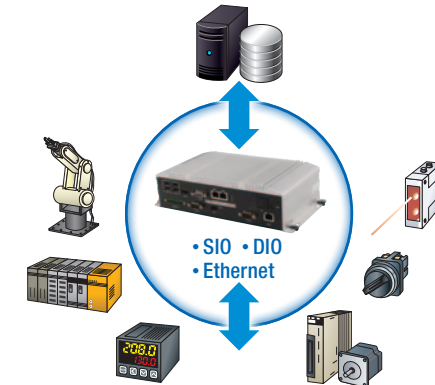

■ Compact size and low power consumption

Highly compact design and mountable via DIN rail or directly. Freedom of product placement and convenient installation.

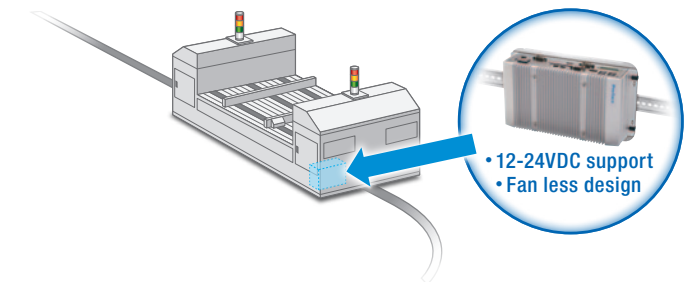

• 12-24VDC support
• Fan less design

FP5000 Series

Industrial display supporting latest operation concepts




■ Benefit from latest multi-touch operation support

The FP5000 series supports touchscreen gestures, so the operator can perform operations like changing screens and zooming in as if using a smartphone or tablet.



■ Improve operation efficiency by simply upgrading your displays

The FP5000 series shares the same panel cutout dimensions as the FP3000 series, making replacement simple.

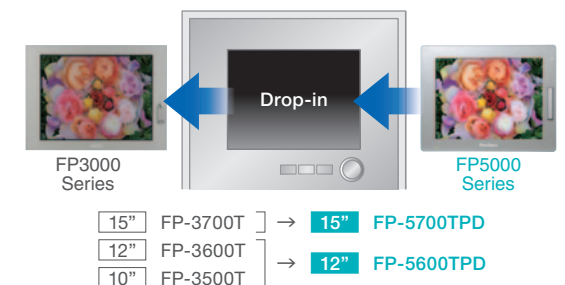


USB Solution: EZ Series

Expand functions with a single USB Cable



■ Supports the convenient EZ Series option, which allows simple expansion of functionality

The single cable architecture further reduces installation time and eases installation at any location.

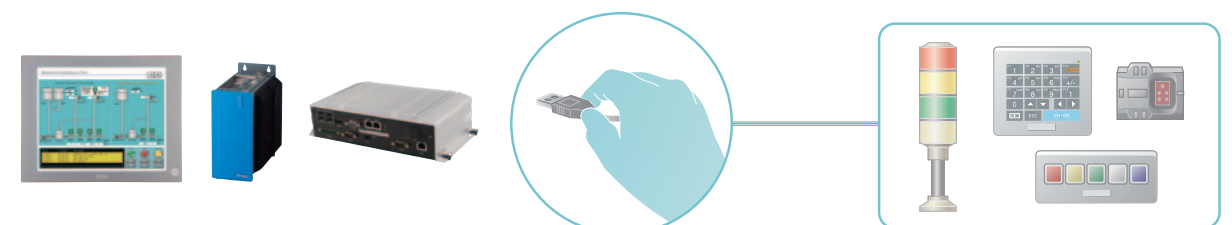

Industrial PC and Industrial Flat Panel Monitor
Line up

											
PS-4800		PS-4700		PS-4700 (Embedded model)		PS-4600		PS-4000B			
Aluminum Bezel		Aluminum Bezel Stainless Steel Bezel		Aluminum Bezel Stainless Steel Bezel		Aluminum Bezel No bezel (Rear-mount)					
Display	19" SXGA (1,280 × 1,024)		15" XGA (1,024 × 768)		15" XGA (1,024 × 768)		12" XGA (1,024 × 768)		—		
Expansion Slot	2 slots* ¹ 1 slot* ² 0 slot		0 slot		0 slot		2 slots* ³ 1 slot* ⁴ 0 slot		5 slots* ⁵ 2 slots* ¹ 1 slot* ²		
CPU	Core™ 2 Duo P8400 2.26GHz Atom™ N270 1.6GHz		Atom™ Z510 1.1GHz		Atom™ Z510 1.1GHz		Core™ i3-3217UE 1.60GHz Celeron™ 827E 1.40GHz		Core™ 2 Duo P8400 2.26GHz Atom™ N270 1.6GHz		
Power Supply	AC 100-240V DC 24V* ⁶		DC 24V* ⁶		DC 24V* ⁶		AC 100-240V DC 24V		DC 24V* ⁶		
RAM	2 to 8GB* ⁷ (Core™ 2 Duo P8400) 1 to 3GB (Atom™ N270)		1 to 2GB		1 to 2GB		1 to 16GB* ⁷		2 to 8GB* ⁷ (Core™ 2 Duo P8400) 1 to 3GB (Atom™ N270)		
Windows® OS	Embedded Standard 2009 (32bit), Embedded Standard 7 Premium (32bit), XP Professional (32bit) or 7 Ultimate (32/64bit)		Embedded Standard 2009 (32bit)		Embedded Standard 2009 (32bit)		Embedded Standard 2009 (32bit), Embedded Standard 7 Premium (32bit), XP Professional (32bit) or 7 Ultimate (32/64bit)		Embedded Standard 2009 (32bit), Embedded Standard 7 Premium (32bit), XP Professional (32bit) or 7 Ultimate (32/64bit)		
Storage	CF : 4GB or 8GB* ⁸ HDD : 500GB SSD : 60GB		CF : 4GB* ⁸		CF : 4GB* ⁸		CFast : 4GB or 8GB* ⁸ HDD : 500GB SSD : 60GB or 128GB		CF : 4GB or 8GB* ⁸ HDD : 500GB SSD : 60GB		
Interface	COM	2		1		2		2		2	
	LAN	2		1		2		2		2	
	CF	1		1		—		—		1	
	CFast	—		—		1		1		—	
	Video	DVI-I × 1		DVI-I × 1		DVI-I × 1		DVI-I × 1		DVI-I × 1	
	USB	5		5 (4)* ⁹		3 (2)* ⁹		5 (4)* ⁹		5	
	Others	—		—		—		—		—	
Expansion Option	Slide-in Slot	DVD Multi drive HDD SSD		—		DVD Multi drive HDD SSD		DVD Multi drive HDD SSD		DVD Multi drive HDD SSD	
	I/F Port	RS-232C/422/485 UPS		Ethernet		Ethernet		RS-232C/422/485 UPS		RS-232C/422/485 DVI-D UPS	
Surrounding Air Temperature	0 to 50°C (32 to 122°F)										

★: Expandable by adding option.

*¹: "PCI x1 and PCIe (x4) x1" or "PCI x2" *²: "PCI x1" *³: "PCI x1 and PCIe(x8) x1" or "PCI x2" *⁴: "PCI x1" or "PCIe(x8) x1" *⁵: 5 slots is available when choosing Core™ 2 Duo P8400 only.

*⁶: Special power supply is available for conformance to marine vessel standards or for the use of UPS. *⁷: More than 6GB memory is available when choosing 64-bit OS.

*⁸: CF Card and CFast are Embedded OS only. *⁹: Stainless Steel Bezel Models and Rear-mount Models have no front USB interface.

The BTO allows you to select your desired PC and customize it in detail.*

* Please note that some patterns cannot be selected depending on the model or combination. Confirm your selection with the BTO sheet on the Pro-face web site.

							
PE-4000B (Atom™ N2600 Model)		PE-4000B (Atom™ N270 Model)		FP-5700TPD		FP-5600TPD	
Display	—			Display	15" XGA (1,024 × 768)	12" XGA (1,024 × 768)	
Expansion Slot	1 slot* ¹⁰			Color Display	16 million Colors		
CPU	Atom™ Dual Core N2600 1.6GHz			Backlight	White LED* ¹²		
Power Supply	DC 12-24V			Power Supply	DC 12-24V		
RAM	2GB or 4GB (DDR3 800 MHz)			RAM	—		
Windows® OS	Embedded Standard 2009 (32bit) Embedded Standard 7 (32bit)			Supported OS	Windows®XP, Windows®7, WES7, Windows®8.1, WES8		
Storage	CFast : 16GB, 8GB CF : 8GB SSD : 80GB			Mounting	Panel mount or 75mm VESA mount		
Interface	COM	6		COM	—		
	LAN	3		LAN	—		
	CF	2		CF	—		
	CFast	1		CFast	—		
	Video	Analog RGB × 1, HDMI × 1		Video	DVI-D		
	USB	5		USB	1		
	Others	Digital I/O × 8		Others	—		
Expansion Option	Slide-in Slot			Slide-in Slot	—		
	I/F Port			I/F Port	—		
Surrounding Air Temperature	0 to 60°C (32 to 140°F) with airflow			Surrounding Air Temperature	0 to 60°C (32 to 140°F)		

*¹⁰: Mini PCIe (full size) *¹¹: Mini PCIe (half size) *¹²: Not user replaceable. When replacement is required, contact your local distributor.

Pro-face

for the best interface

We are always striving to bring you the high quality interface designed to provide a cohesive, evolving connection between customers and high quality products, service and support from around the world.

All eyes on the customer make us "the best interface"

*i*ntimacy

Connect intimately with our customers and stakeholders

*i*nteraction

Enhance customer experience through positive interaction

*i*nnovation

Provide benefits to our customers through innovation

⚠ WARNING

HAZARD OF OPERATOR INJURY, OR UNINTENDED EQUIPMENT DAMAGE

Before operating any of these products, be sure to read all related manuals thoroughly.

Failure to follow these instructions can result in death, serious injury, or equipment damage.

- For printing purposes, the colors in this catalog may differ from those of the actual unit.
- All product names used in this catalog are the registered trademarks or trademarks of their respective companies.
- Actual user screens may differ from the screens shown here.
- All information contained in this catalog is subject to change without notice.
- Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Digital for any consequences arising out of the use of this material.

Global Headquarters
Digital Electronics Corporation
Osaka, JAPAN
Tel: +81 (0)6 6208-3133
Fax: +81 (0)6 6208-3136
www.pro-face.com
info@pro-face.com

Indonesia
Pro-face Indonesia
Ventura Building - 7th Floor, Jl. RA Kartini Kav.26,
Cilandak, Jakarta Selatan 12430 Indonesia
Tel / Fax: +62 21 750 4496
www.proface.co.id
info@proface.co.id

South Korea
Pro-face Korea Co., Ltd.
Seoul, SOUTH KOREA
Tel: +82 (0)2 2630 9850
Fax: +82 (0)2 2630 9860
www.proface.co.kr
proface@proface.co.kr

European Headquarters
Pro-face Europe B.V.
Hoofddorp, THE NETHERLANDS
Tel: +31 (0)23 55 44 099
Fax: +31 (0)23 55 44 090
www.proface.eu
info@proface.eu

Italy
Pro-face Italia S.p.a.
Bovisio Masciago (Milano), ITALY
Tel: +39 (0)362 59 96 1
Fax: +39 (0)362 59 96 69
www.proface.it
info@proface.it

Spain and Portugal
Pro-face España
Cardedeu (Barcelona), SPAIN
Tel: +34 (0)93 846 07 45
Fax: +34 (0)93 845 48 68
www.proface.es
info@proface.es

Australia and New Zealand
Pro-face Australia
Mt. Waverley, AUSTRALIA
Tel: +61 (0)3 9550 7396
Fax: +61 (0)3 9550 7390
www.pro-face.com.au www.pro-face.co.nz
pfau@pro-face.com

North America
Pro-face America, Inc.
Ann Arbor, MI U.S.A
Tel: +1 734 477 0600
Fax: +1 734 864 7347
www.profaceamerica.com
info@profaceamerica.com

Taiwan
Pro-face Taiwan
Taipei, TAIWAN
Tel: +886 (0)2 2657 1121
Fax: +886 (0)2 2657 1021
www.proface.com.tw
proface@proface.com.tw

Austria
Pro-face Europe B.V.(Austria Office)
Hagenberg, AUSTRIA
Tel: +43 7236 3343 620
FAX: +43 7236 3343 629
www.proface.at
info@proface.at

Denmark
Pro-face Northern Europe ApS
Roskilde, DENMARK
Tel: +45 70 22 01 22
Fax: +45 70 22 01 33
www.proface.dk
info@proface.dk

Sweden
Pro-face Sweden AB
Löddeköpinge (Malmö), SWEDEN
Tel: +46 46 540 90 70
Fax: +46 46 71 27 90
www.proface.se
info@proface.se

China
Pro-face China International Trading Co., Ltd.
Shanghai, P. R. CHINA
Tel: +86 (0)21 6361 5175
Fax: +86 (0)21 6361 5176
www.proface.com.cn
proface@proface.com.cn

Singapore
Pro-face Singapore
TechPoint, Singapore
Tel: +65-6832-5533
Fax: +65-6415-1605
www.proface.sg
info@proface.sg

India
Pro-face India
Bangalore, INDIA
Tel: +91 80 4333 3540/3541
Fax: +91 80 4333 3222
www.proface.co.in
sales.proface@proface.co.in

South-East Asia Pacific
Pro-face South-East Asia Pacific Co.,Ltd.
Bangkok, THAILAND
Tel: +66 (0)2 617 5678
Fax: +66 (0)2 617 5688
www.proface.co.th
pfsales@proface.co.th

France
Pro-face France S.A.S.
Mitry-Mory, FRANCE
Tel: +33 (0)1 60 21 22 91
Fax: +33 (0)1 60 21 22 92
www.proface.fr
info@proface.fr

Poland
Pro-face Europe B.V.(Warsaw Office)
Warszawa, POLAND
Tel: +48 (22) 465 66 62
Fax: +48 (22) 465 66 67
www.proface.pl
info@proface.pl

Switzerland
Pro-face Schweiz GmbH
Regensdorf, SWITZERLAND
Tel: +41 (0)43 343 7272
Fax: +41 (0)43 343 7279
www.proface.ch
info@proface.ch

Germany
Pro-face Deutschland GmbH
Solingen, GERMANY
Tel: +49 (0)212 258 260
Fax: +49 (0)212 258 2640
www.proface.de
info@pro-face.de

Russia
Pro-face Europe B.V. (Russia Office)
Saint-Petersburg, RUSSIA
Tel: +7 (812) 336 47 06
Fax: +7 (812) 336 47 18
www.pro-face.ru
info@pro-face.ru

United Kingdom
Pro-face UK Ltd
Coventry, ENGLAND
Tel: +44 (0)2476 511288
Fax: +44 (0)2476 511499
www.proface.co.uk
info@proface.co.uk



SCIGATE AUTOMATION (S) PTE LTD

No 1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6561 0588

Email: sales@scigate.com.sg

Web: https://scigate.com.sg/

Business Hours: Monday - Friday 8:30AM - 6:15PM