

M1 SERIES




DESCRIPTION

Two ways and one valve manifolds **M1** series are used to isolate the instrument from the plant in order to put in place maintenance operations.


Some of the main characteristics of this product are:

- Working pressure up to 6000 psi (414 bar)
- Various materials to be used:
 - AISI 316 (Std)
 - AISI 316L
 - CARBON STEEL / ASTM A105
 - MONEL K-500
 - MONEL 400
 - HASTELLOY C276
- Various process connection:
 - NPT, BSP, Socket Weld
- Conformity to NACE MR-01-75 (Optional)
- Degreasing for Oxygen service (Optional)



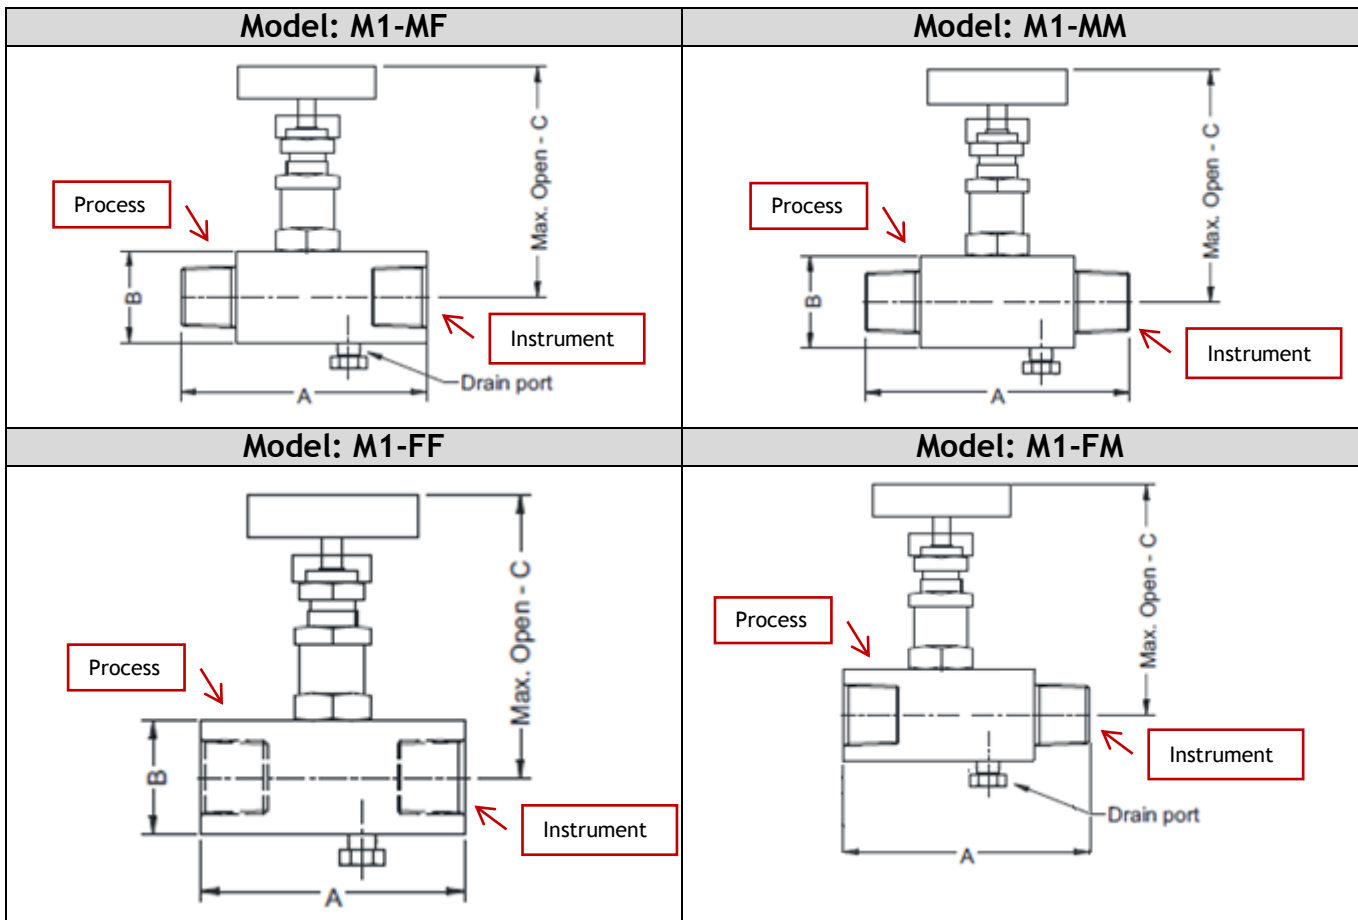

DN	Type	A	B	C (Maximum opening)
1/4" NPT	FxF	70	25	65
	MxF & FxM	70	25	65
	MxM	75	25	65
3/8" NPT	FxF	70	25	65
	MxF & FxM	70	25	65
	MxM	75	25	65
1/2" NPT	FxF	75	32	86.6
	MxF & FxM	83	32	86.6
	MxM	88	32	86.6
3/4" NPT	FxF	75	38	86.6
	MxF & FxM	83	38	86.6
	MxM	88	38	86.6

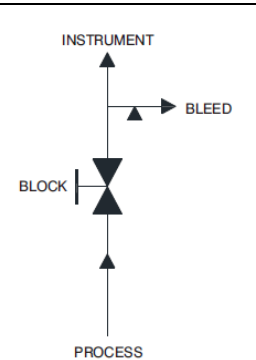




SCIGATE AUTOMATION (S) PTE LTD
 No.1 Bukit Batok Street 22 #01-01 Singapore 659592
 Tel: (65) 6561 0488 Fax: (65) 6562 0588
 Email: sales@scigate.com.sg Web: www.scigate.com.sg
 Business Hours: Monday - Friday 8.30am - 6.15pm