

PRODUCTS CATALOG 2023

Wilow

WIFI | WIRELESS IOT SENSORS

**2.4
GHZ**

2.4GHZ | WIRELESS IOT SENSORS

www.beanair.com

IOT

HEADQUARTER

BeanAir® Germany
Wolfener Straße 32-34
12681 Berlin - Germany

Recent developments in sensor technology, especially when wireless technology is considered, have opened up new gates in terms of health monitoring and preemptive fault detection.

MAIN WEBSITE

www.beanair.com

To meet these new challenges, BeanAir®, a leading German company in sensing technology, designs and manufactures smart, rugged and open-standard wireless IOT sensors.

PHONE NUMBER

+49 (0) 30 98366680

BeanAir® Wireless IOT sensors constitute an outstanding technology for various applications : Structural Health Monitoring, Test and Measurement, Land Surveying, Condition Monitoring, Environmental Monitoring ...

EMAIL

info@beanair.com

Furthermore, the high level of versatility, performance, and reliability of its wireless IOT sensors, in addition to a worldwide presence thanks to effective system integrators partners, Beanair® has acquired an international outreach and continues to maintain a strong reputation with major customers in numerous sectors.





www.facebook.com/BeanAir



WWW.BEANAIR.COM



www.youtube.com/user/BeanairSensors

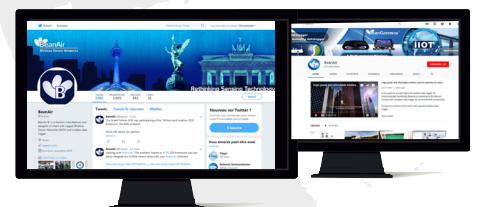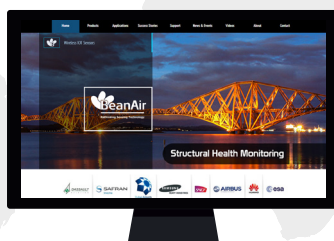

www.twitter.com/beanair



STRUCTURAL HEALTH MONITORING

The recent developments in sensor technology, especially when wireless technology is considered, have opened up new gates in terms of health monitoring and preemptive fault detection.

BeanAir®'s wireless sensor technology offers great reliability, versatility, maintainability and easy to deploy technology

GROUND VIBRATION MONITORING

Monitoring and control of ground and structural vibrations provide the rational to select measures for prevention or mitigation of vibration problems.

Discover how our wireless vibration sensors can provide a great flexibility in terms of deployment and performances.

CONDITION MONITORING

BeanAir® offers the ideal solution to your needs in terms of measurement and instrumentation to improve equipment energy efficiency and get better knowledge about equipment availability.

ENVIRONMENTAL MONITORING

Beanair provides a wireless IOT sensors system perfectly adapted to any environmental need:

- Autonomous wireless sensors (ultra low battery consumption with an autonomy than can go up to 7 years)
- Various information transmission protocols
- Data acquisition and storage device
- Wireless IOT sensors supervision and monitoring software

TEST AND MEASUREMENT

Offer a True Flexibility to your Testbench !



BeanAir technology offers solutions for rolling stock, naval and aeronautic manufacturer in terms of test and measurement, aiming at reducing costs related to test bench.

LAND SURVEYING







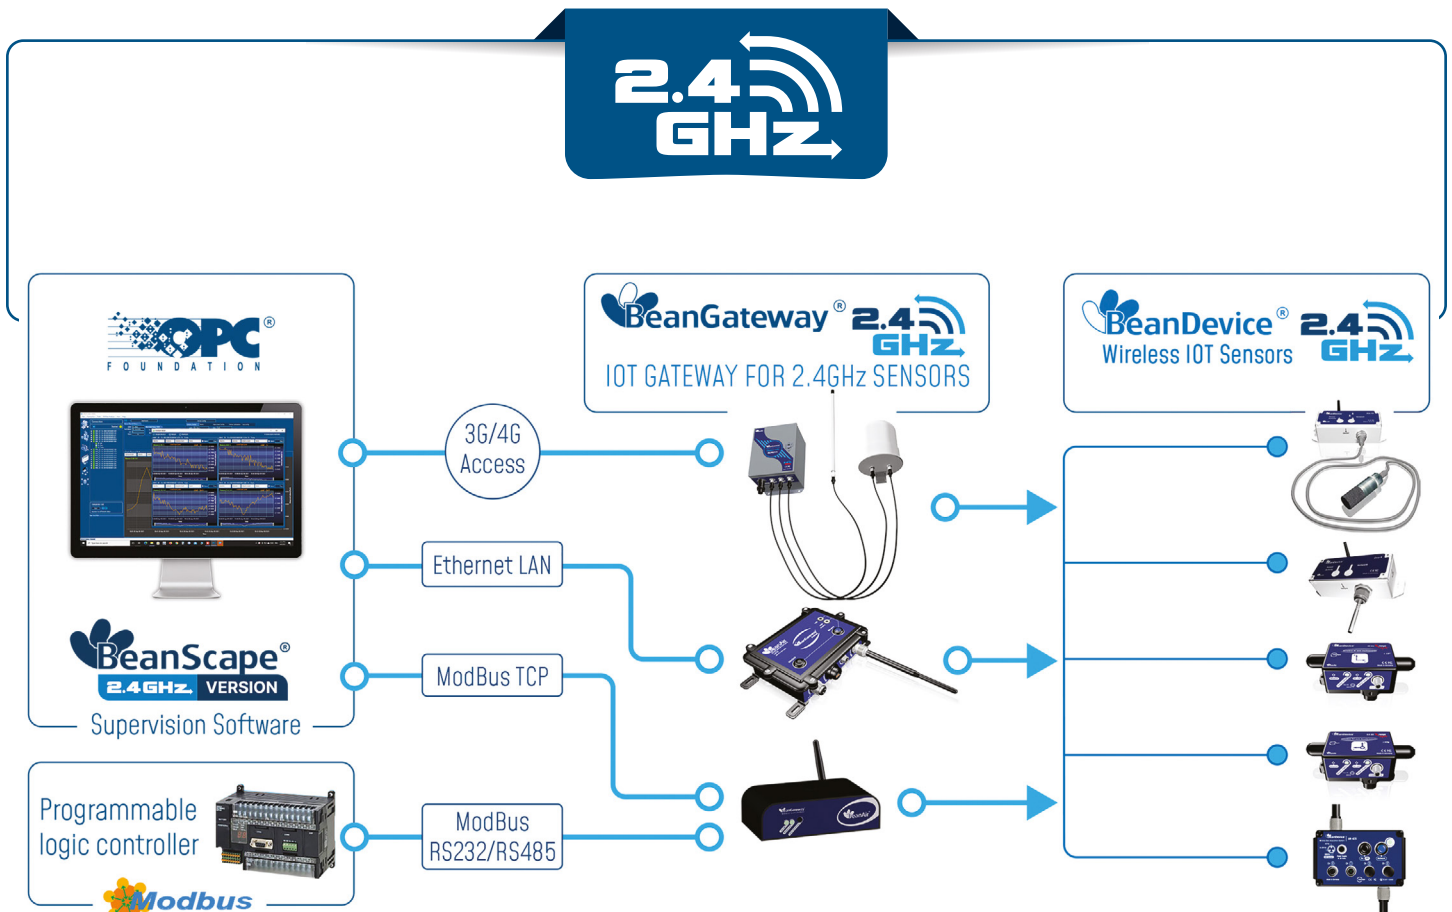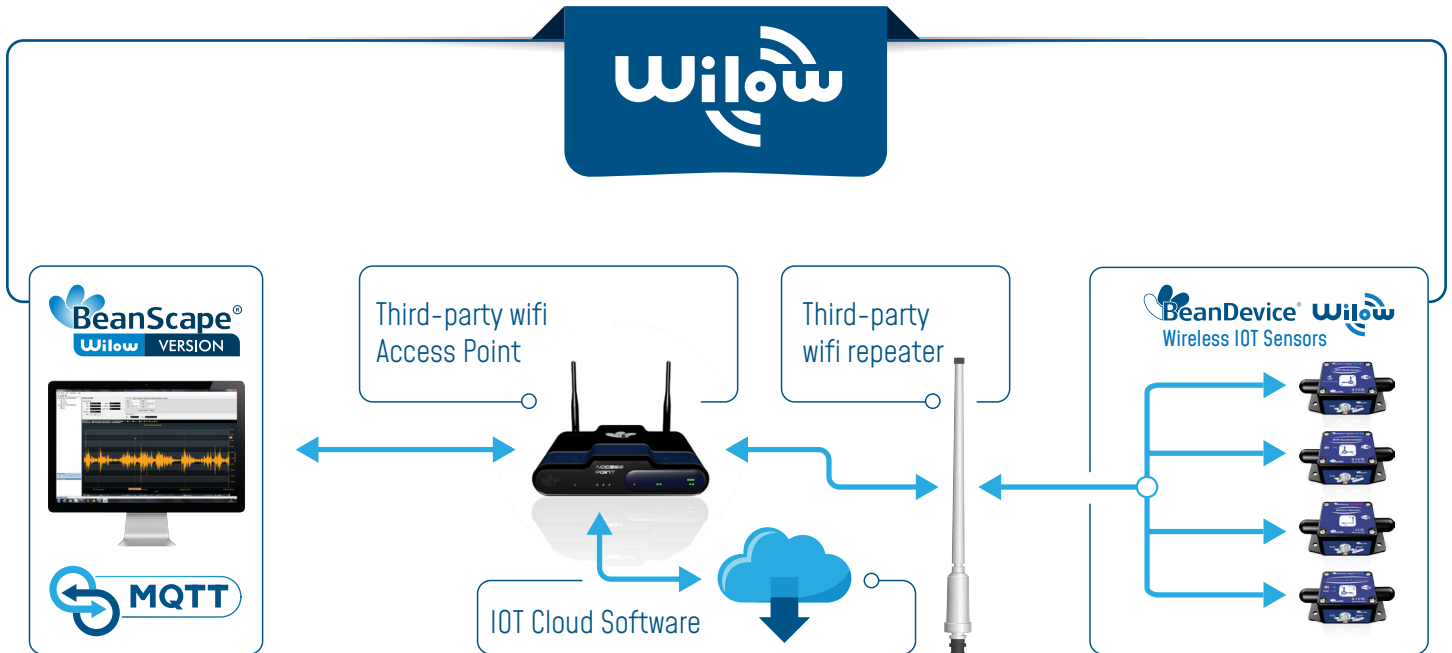

















Surveying and land surveying is the measurement and mapping of our surrounding environment using mathematics, specialized technology and equipment.

Discover how Beanair provides field-proven and cost-effective wireless IOT sensors for land surveying.

FINDING THE WIRELESS SENSOR FITTING YOUR APPLICATION



COMPARISON TABLE

		
Wireless range in Line-of- Sight (L.O.S.) and Non Line-of-Sight (NLOS)	200 m in L.O.S. 20-50 m in N.L.O.S. Wireless range can be extended by adding WIFI bridge/repeaters	500 m in L.O.S. 30-100 m in N.L.O.S
Wireless Technology	IEEE 802.11 b/g/n @2.4GHz	2.4GHz wireless based on IEEE 802.15.4E
Open Standard or proprietary protocol	Open-Standard protocol	Proprietary Protocol
Need a specific Wireless Network Coordinator [Gateway] ?		
Low Power	 	   
Network Aggregation capacity	  	
Available sensors/DAQ	Vibration & Peak Particle Velocity, shock, Inclinometer	temperature, IR temperature, humidity, dew point, Vibration & Peak Particle Velocity, shock, inclinometer, analog DAQ [4-20mA, ±20 mV, ±5V, ±10V]
IOT Ready (MQTT protocol)	YES. Free source codes available in C#, Labview, Android and NodeRed	
Energy Harvesting [Solar power supply]		
USB Link	USB 2.0	
USB power supply		
Easy Firmware update	USB and Wifi	
Store and Forward+		
Clock- synchronization	±30 ms	±2.5 ms
Encryption on Wireless Link	WEP, WAP, WAP2	
Wakeup function	Timer	Timer

OPEN-STANDARD WIFI SENSORS FOR INDUSTRIAL INTERNET OF THINGS













Until now, WIFI technology was extremely energy greedy and unreliable. Users working on Structural Health Monitoring (SHM) and condition monitoring were more favorable to deploy proprietary wireless IOT sensors offering a better reliability and a low power operation.

Thanks to more than 13 years of experience in sensing technology and wireless IOT sensors, our research and development team worked intensively with our customers to bring out WiLow® (Wifi Low Power) technology, a new generation of WIFI IOT sensors (vibration, inclination and shock) which is reliable, ultra-low power, open-standard and adapted to dynamic data acquisition.

WILOW® SENSOR SERIES DEPLOYMENT




MAIN FEATURES

 ULP (Ultra Low Power) Wifi Technology - IEEE 802.11 b/g/n (2.4 Ghz frequency band)	 Rugged aluminum casing Waterproof IP67/NEMA 6
 Embedded Data Logger: up to 5 million data points (with events dating)	 USB 2.0 for device configuration (including firmware update)
 Over the Air Firmware Upgrade via WIFI.	 Store and Forward+: Lossless data transmission with hard real-time
 SSD (Smart Shock Detection), WILOW® sensor can wakeup on shock detection (BeanDevice WILOW® AX-3DS only)	 Industrial temperature range -40 °C to +65 °C
 Onboard SNTP (Simple Net Time Protocol) Client with ±30ms of precision	 SSL/TLS Encryption over MQTT Data exchange
 Solar Power Supply (option)	 Integrated MQTT Data exchange with SSL/TLS Encryption. A lightweight and open-standard Internet of Things protocol.

By connecting **WILOW®** IOT Sensors to existing WIFI infrastructure, user can benefit from a rapid return on investment:

- Lower total cost of ownership-works
- Large installed base and consequent broad-based familiarity with configuration, use and troubleshooting at the physical and link layers
- Easy provisioning & IT friendly: **WILOW®** IOT sensors use IP-over-Ethernet networking environment

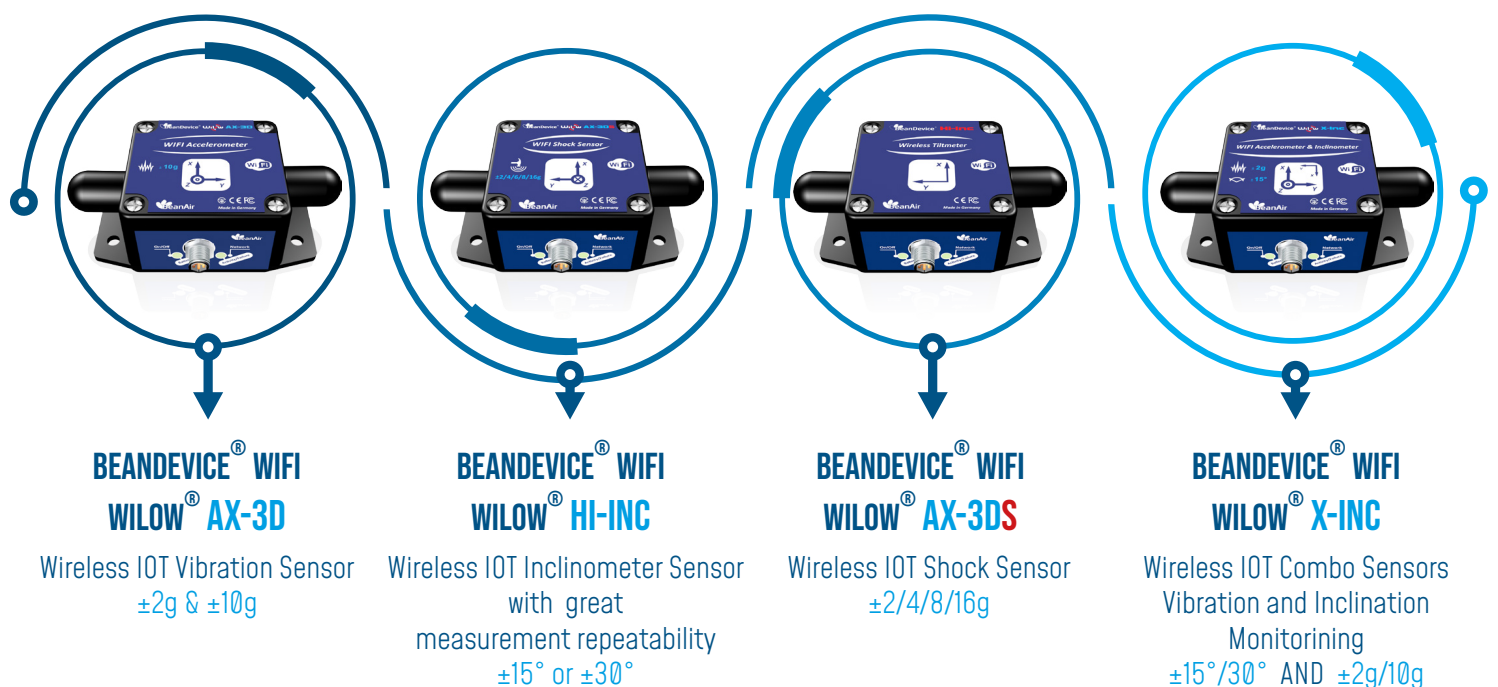

GET READY FOR INDUSTRIAL INTERNET OF THINGS (IOT)

Industrial Internet of things

Ready for Industrial Internet of things (IOT) applications, WiLow® sensors integrate natively MQTT (Message Queuing Telemetry Transport) data frame, a lightweight and open-source (OASIS & ISO/IEC 20922:2016 standards) Internet of Things protocol.

MQTT is based on publish/subscribe paradigm, therefore user can easily connect, configure and manage several WiLow® sensors at the same time from a unique IOT software platform.

Users looking for a high level of security can count on a mechanism to notify interested parties to an abnormal disconnection of a client using the Last Will and Testament feature.

No need to spend several months to develop a specific and complex supervision software, user can easily integrate WiLow® sensors in a third-party IOT Cloud platform (Amazon web services, IBM Watson, Microsoft Azure, Facebook Messenger, Alibaba Cloud....).

Non-developer users can still use the BeanScape® software to setup a quick and affordable Wifi sensor network.




TRIGGER DATA ACQUISITION ON SHOCK DETECTION

Thanks to our Smart Shock Detection (SSD) technology, the BeanDevice Wilow AX-3DS can wake up on a shock detection and starts immediately data acquisition and real-time wireless transmission. Unsolicited wakeup can be avoided by configuring both shock threshold (up to 16g) and a delay timer. User will spend less time to analyze data acquisition as both data recording & wireless transmission start when a shock threshold is reached. Battery life can be extended as Wilow® IOT sensors are most of the time in sleep power mode.



RELIABLE WIFI TECHNOLOGY THANKS TO OUR “STORE AND FORWARD+” FUNCTION

The **store and forward** technique operates by storing the message transmitted by WiLow® IOT sensors to a WIFI access point/ WIFI receiver. If the message is not received due to a network disruption, it will be retransmitted on the next transmission cycle. This technique enables a Lossless data transmission.

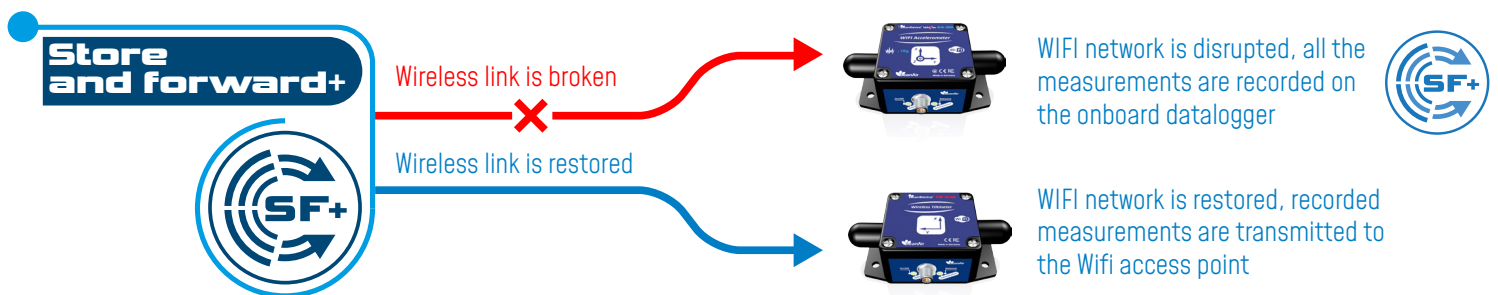


SMART AND FLEXIBLE POWER SUPPLY



WILOW® IOT SENSORS CAN BE POWER SUPPLIED FROM DIFFERENT POWER SOURCES :



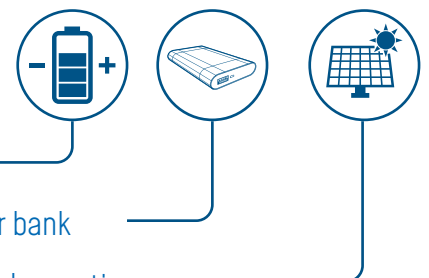

- ← Internal rechargeable Lithium-Polymer battery
- ← USB 5VDC POWER SUPPLY, compatible with any kind of USB power bank
- ← AUXILIARY POWER SUPPLY 6-24VDC compatible with solar energy harvesting



WILOW[®]—ULTRA LOW POWER WIFI ACCELEROMETER SELECTION GUIDE

Main Features	BeanDevice [®] Wilow [®] AX-3D		BeanDevice [®] Wilow [®] AX-3DS
Reference & measurement range	BND-WILOW-AX-3D-2G	BND-WILOW-AX-3D-10G	BND-WILOW-AX-3DS-16G
			
Measurement Range	±2g	±10g	±2/4/8/16g
Spectral noise density@ BW 10Hz	45 µg/√Hz	100 µg/√Hz	150 µg/√Hz
Applications	Vibration Monitoring		Mechanical Shock Monitoring
Maximum sampling rate per channel [SPS—sample per second]	2000 SPS		1600 SPS

WILOW[®]—ULTRA LOW POWER WIFI INCLINOMETER SELECTION GUIDE

Main Features	BeanDevice [®] Wilow [®] HI-INC	
Reference & measurement range	BND-WILOW-HI-INC-15B	BND-WILOW-HI-INC-30B
		
Sensor Repeatability	±0.003°	±0.004°
Measurement Range	±15°	±30°
Sensor Resolution	0.001°	
Spectral noise density@ BW 10Hz	0.0004 °/√Hz	
Maximum sampling rate per axis [SPS—sample per second]	2000 SPS	

WILOW[®]—ULTRA LOW POWER WIFI | COMMON SPECIFICATIONS

- **Maximum wireless Range [L.O.S.]**: 200 m, can be extended by adding WIFI Repeater/Bridge
- **Data Logger Size**: 5 million data points
- **Mounting techniques**: Screw mounition by default, options: 90 degree bracket (add the extension –BR) or magnetic mounting (add the extension –M)
- **Internal Battery/ External Power Supply**:
 - Internal Rechargeable Lithium-Ion 780 mAh
 - **External Power supply**:
 - USB power supply (5VDC)
 - Option for auxiliary power supply : 8-24VDC compatible with solar energy harvesting (add the extension –EHR)
- **Casing** : Aluminum casing - Dimensions in mm [LxWxH]:35x59x65 mm without antenna & eyelet, Weight (with internal battery, w/o mounting option) : 220g

OPTIONAL ACCESSORIES AND SERVICES



X-SOLAR | STAND-ALONE SOLAR POWER SYSTEMS

High efficiency Solar Panel with Solar Charging Controller and Lead-acid battery

REF : X-SOL-WILOW-12AH-20W-4CH-5V-CL

REF: X-SOL-7AH-SLP-VOUT-CL

Input voltage solar cell panel:
14-30VDC

Number of output voltage: 1

Output Voltage: 5VDC

Battery Capacity: 7Ah

Dimensions: 260 mm x 160 mm x 90 mm



IP Rating: Waterproof IP67 | NEMA 6

Weight: 4.5 kg



SOLAR PANEL

High efficiency Monocrystalline solar cell technology

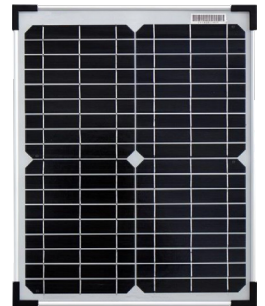

SOLAR PANEL

X-SOLAR



BeanDevice®
Wilow® AX-3D

BeanDevice®
Wilow® AX-3DS

BeanDevice®
Wilow® X-INC

BeanDevice®
Wilow® HI-INC

BeanDevice® Wilow®



MAGNETIC MOUNTING LID

SCREW MOUNTING LID

90° BRACKET



MECHANICAL MOUNTING OPTIONS

By default, the BeanDevice® Wilow® comes with a screw mounting lid.

Two other mounting options are available:

- Magnetic mounting
- 90° bracket

A RUGGEDIZED OUTDOOR IOT GATEWAY FOR YOUR MONITORING SITE



The **Wilow® IOT Gateway** is a ruggedized outdoor (IP66) IOT gateway designed for Harsh Industrial Environment. It supports both WIFI and 3G/4G/LTE wireless protocols and allows a very easy connection to our **Wilow® IOT sensors**.

Thanks to WDS (Wireless Distribution System, only available on Mains Power version) function, a wireless bridging with other WIFI Bridges/Repeaters can be configured for a better wireless network coverage. The combination of MQTT protocol and 4G connectivity enables effortless data transmission from the sensor to the cloud. The **BeanScape® Wilow® RA**, a supervision software dedicated to IOT sensors with remote access, can display in real-time all the collected data from the monitoring site. Provided with high gain outdoor antennas (12dBi for LTE, 9dBi for WIFI), the connection will be secured from the wireless IOT sensor to the remote supervision software. The **Wilow® IOT Gateway** can be powered from an external AC Power supply (90 ~ 264VAC) with UPS Battery or solar power supply. The internal Lead-acid battery provides instantaneous protection from external power supply interruptions, the wireless network activity is maintained during this time.

IOT GATEWAY WITH 4G CONNECTIVITY DEDICATED TO WILLOW® SENSORS

IOT Gateway with 4G connectivity dedicated to **Wilow®** sensors:

- Remote access to monitoring site thanks to the integrated 3G/4G/LTE Router (4G Connectivity CAT4 up to 150 Mbps) and the built-in MQTT broker
- WIFI connectivity (IEEE 802.11 b/g/n) 2.4GHz
- WDS (Wireless Distribution System) with WIFI AP/ Station/Bridge network configuration
- Robust, Waterproof (IP67) and High Gain antennas:
 - 3G/4G/LTE antenna (2x2 MIMO) with 12dBi of Gain
 - 2.4GHz antenna with 9dBi of Gain
- UPS Battery (Lead Acid Battery 12Ah)
- Ruggedized and watertight (IP66 | Nema 4) steel casing (LxWxh: 65x59x35mm, 9.8 Kg) with anti-thief protection
- Certifications for European Market (CE), North America (FCC) and Japan (Giteki)
- Industrial operating temperature (-15°C to +50°C)

APPLICATIONS

The **Wilow® IOT GATEWAY 4G** is the right solution for different monitoring applications:

- Structural Health Monitoring.
- Land Surveying.
- Industrial Applications
- Ground vibration monitoring on construction site.

Important: **BeanScape® Wilow® RA** is needed for Remote Acces

Our **2.4GHz sensor series** is a field-proven wireless IOT sensors for Industrial applications. It integrates a great diversity of measurements: vibration, Inclination, Temperature, Humidity, Shock and analog data acquisition for an easy connection to your own sensor.



BeanDevice® 2.4GHz



WIRELESS IOT SENSORS WITH INTEGRATED DATA LOGGER

The **BeanDevice® 2.4GHz** is a wireless sensor / DAQ providing a real-time wireless transmission and a high capacity data logger with low power operation. It can be used for both dynamic and static measurement.

BeanGateway® 2.4GHz






WIRELESS IOT GATEWAY

The **BeanGateway® 2.4GHz** is used to Build Beanair Wireless IOT sensors. It supports the conversation of data exchanged, compression and IP connectivity with the network thereby reducing the intelligence required in these platforms, maintenance and therefore the associated cost.





SmartSensor

WIRELESS IOT ACCELEROMETER SELECTION GUIDE

Main Features	BeanDevice® AX-3D	BeanDevice® AX-3DS	BeanDevice® AX-3D X-Range
			
Reference	BND-2.4GHz-AX-3D- 2G -RB BND-2.4GHz-AX-3D- 10G -RB	BND-2.4GHz-AX-3DS- 8G -RB BND-2.4GHz-AX-3DS- 8G -RB- SCM BND-2.4GHz-AX-3DS- 8G -RB- MM BND-2.4GHz-AX-3DS- 24G -RB BND-2.4GHz-AX-3DS- 24G -RB- SCM BND-2.4GHz-AX-3DS- 24G -RB- MM	BND-2.4GHz-AX-3D-XR- 2G -RB- MM BND-2.4GHz-AX-3D-XR- 2G -RB- SCM BND-2.4GHz-AX-3D-XR- 10G -RB- MM BND-2.4GHz-AX-3D-XR- 10G -RB- SCM
Measurement Range	±2g or ±10g	±2/4/8g or ±6/12/24g	±2g or ±10g
Spectral noise density@ BW 10Hz	±2g Version : 45 µg/√Hz ±10g version : 100 µg/√Hz	±24G Version : 650 µg/√Hz ±8G Version : 218 µg/√Hz	±2g Version : 45 µg/√Hz ±10g version : 100 µg/√Hz
Applications	Vibration Monitoring	Shock, Impact and vibration monitoring	High-Accuracy Vibration Monitoring
Maximum wireless Range (L.O.S. and N.L.O.S.)	500 m in L.O.S 30-100 meters in N.L.O.S		
Maximum sampling rate per channel (SPS—sample per second)	1000 SPS	1000 SPS	1000 SPS
Available Measurement mode	Low Duty Cycle 1s to 24h Streaming	Low Duty Cycle 1s to 24h Smart Shock Detection (SSD) Streaming	Low Duty Cycle 1s to 24h Streaming
Data Logger Size	1 million logs		8 million logs
Internal Battery	Rechargeable Lithium-Polymer battery 1250mAh		Rechargeable Lithium-Polymer battery 2200mAh
Mounting option	Adhesive Mounting	Screw Mounting Magnetic Mounting	
Casing	Waterproof IP67 aluminum enclosure Dimensions in mm (LxWxH) : 80x55x36 Weight : 155g		Waterproof IP67 Aluminum enclosure , Dimensions in mm (LxWxH) : 100 x 71 x 38 Weight : 225g (screw mounting) 252g (magnetic mounting)

BEANDEVICE® 2.4GHZ | WIRELESS AND ULTRA-LOW NOISE VIBRATION SENSOR AX-3D-SR | SCALABLE MEASURING RANGE ±1.2G AND ±2.4G

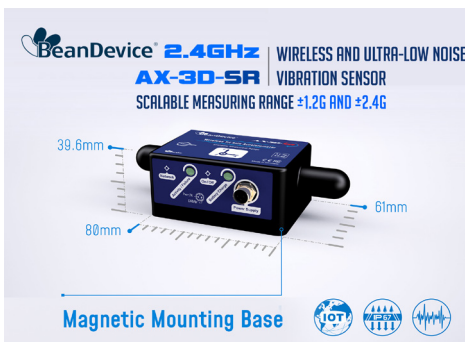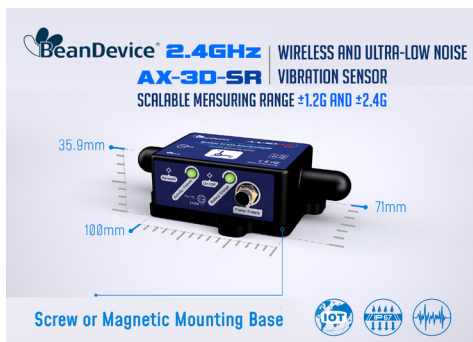


BND-2.4GHZ-AX-3D-SR-MR-PS-MO		
MR- Measurement Range: 1.2T tri-axis Low noise vibration sensor ±1.2g/±2.4g	PS - Power Supply RB Built-in rechargeable Lithium-Polymer battery 2Ah	MO - Mounting Option SCM - Screw Mounting Lid MM - Magnetic Mounting Lid
Accelerometer technology	Accurate and low power MEMS technology	
Scalable Measuring Range	user-selectable range ±1.2g or ±2.4g, with automatic range adjustment depending on the application	
Sensor resolution	0.085mg	
Noise density	20 µg/√Hz for ±1.2G measurement range 32 µg/√Hz for ±2.4G measurement range	
Sensor precision (full scale, @ 25°C @1Hz sampling rate)	±0.7mg for ±1.2g measurement range ±1.3mg for ±2.4g measurement range	
Sensitivity temperature dependency (temperature range -25°C to +85°C)	±0.1 %	
Offset LifeTime Drift (@25°C)	±4mg	
Sensor frequency Response [-3 dB]	DC to 40 Hz for ±1.2g measurement range DC to 70 Hz for ±1.2g measurement range	
Integrated battery charger	Integrated Lithium-ion battery charger with high precision battery monitoring . • Overvoltage/Overcurrent/Short-Circuit/Undervoltage protection • Battery Temperature monitoring	
Casing	• Aluminum AL6061 & Waterproof casing • Dimensions in mm (LxWxH), 100 x 71 x 38 (without Radome antennas, with mounting eyelet) • Weight (with internal battery) . 225g (screw mounting) 252g (magnetic mounting)	





SmartSensor

WIRELESS INCLINOMETER SELECTION GUIDE

Main Features	BeanDevice® INC	BeanDevice® HI-INC	BeanDevice® HI-INC X-Range
			
Reference	BND-2.4GHz-INC-30B-RB BND-2.4GHz-INC-90B-RB BND-2.4GHz-INC-30B-XT BND-2.4GHz-INC-90B-XT	BND-2.4GHz-HI-INC-15B-RB BND-2.4GHz-HI-INC-30B-RB BND-2.4GHz-HI-INC-15B-XT BND-2.4GHz-HI-INC-30B-XT	BND-2.4GHz-HI-INC-15B-XR-RB-SCM BND-2.4GHz-HI-INC-30B-XR-RB-SCM BND-2.4GHz-HI-INC-15B-XR-XT-SCM BND-2.4GHz-HI-INC-30B-XR-XT-SCM BND-2.4GHz-HI-INC-15B-XR-RB-MM BND-2.4GHz-HI-INC-30B-XR-RB-MM BND-2.4GHz-HI-INC-15B-XR-XT-MM BND-2.4GHz-HI-INC-30B-XR-XT-MM
Measurement Range	±30° or ±90°	±15° or ±30°	±15° or ±30°
Sensor Technology	Bi-Axis Inclinometer		
Sensor Resolution	±0.0025°	±0.001°	
Noise spectral density DC to 100 Hz	0.0008 °/√Hz	0.0004 °/√Hz	0.0004 °/√Hz
Sensor repeatability (full scale @25 °C)	±0.04° for bi-axis ±30° version ±0.08° for bi-axis ±90° version	±0.005° for bi-axis ±15° version ±0.006° for bi-axis ±30° version	
Maximum wireless Range (L.O.S. and N.L.O.S.)	500 m in L.O.S 30-100 meters in N.L.O.S		
Data Logger Size	1 million logs		8 million logs
Internal Battery	Rechargeable Lithium-Polymer battery 950mAh		Rechargeable Lithium-Polymer battery 2200mAh
Mounting option	Adhesive Mounting		Screw Mounting Magnetic Mounting
Casing	Waterproof IP67 aluminum enclosure Dimensions in mm (LxWxH) , 80x55x36 Weight , 155g		Waterproof IP67 Aluminum enclosure , Dimensions in mm (LxWxH) , 100 x 71 x 38 Weight , 225g (screw mounting) 252g (magnetic mounting)

BEANDEVICE® 2.4GHZ | WIRELESS TRI AXIS INCLINOMETER SENSOR HI-INC-SR | SCALABLE MEASURING RANGE $\pm 10^\circ$ AND $\pm 90^\circ$

BND-2.4GHZ-HI-INC-SR-MR-PS-MO		
MR- Measurement Range 10T Tri-axis $\pm 10^\circ$ / $\pm 90^\circ$	PS - Power Supply RB Built-in rechargeable Lithium-Polymer battery 2Ah	MO - Mounting Option SCM - Screw Mounting Lid MM - Magnetic Mounting Lid
Inclinometer technology	Accurate and low power MEMS technology	
Scalable Measuring Range	user-selectable range $\pm 10^\circ$ or $\pm 90^\circ$, with automatic range adjustment depending on the application	
Sensor resolution	0.0055°	
Noise density	for $\pm 10^\circ$ range · 0.0007 °/√Hz on Y Axis, 0.008 °/√Hz on X, Z Axis for $\pm 90^\circ$ range · 0.0012 °/√Hz on all axis	
Sensor precision (full scale, @ 25°C, Static Measurement Mode every 2s)	$\pm 0.005^\circ$ for $\pm 10^\circ$ measurement range $\pm 0.009^\circ$ for $\pm 90^\circ$ measurement range	
Offset temperature dependency (temperature range -25°C to +85°C)	$\pm 0.0008^\circ/\text{°C}$	
Sensitivity temperature dependency (temperature range -25°C to +85°C)	$\pm 0.1\%$	
Offset LifeTime Drift (@25°C)	$\pm 0.08^\circ$	
Integrated battery charger	Integrated Lithium-ion battery charger with high precision battery monitoring · • Overvoltage/Overcurrent/Short-Circuit/Undervoltage protection • Battery Temperature monitoring	
Casing	<ul style="list-style-type: none"> Aluminum AL6061 & Waterproof casing Dimensions in mm (LxWxH) · 100 x 71 x 38 (without Radome antennas, with mounting eyelet) Weight (with internal battery) · 225g (screw mounting) 252g (magnetic mounting) 	





SmartSensor

OPTIONAL ACCESSORIES AND SERVICES

X-SOLAR | HIGH EFFICIENCY SOLAR PANEL WITH SOLAR CHARGING CONTROLLER AND LEAD-ACID BATTERY



REF : X-SOL-14AH-SLP-VOUT-CL

Input voltage solar cell panel: 14-30VDC

Number of output voltage: 4

Output Voltage: 4VDC or 12VDC

Battery Capacity: 14Ah

Dimensions: 204 mm x 169 mm x 156 mm

IP Rating: Waterproof IP67 | NEMA 6

Weight: 8 kg



REF: X-SOL-7AH-SLP-VOUT-CL

Input voltage solar cell panel: 14-30VDC

Number of output voltage: 1

Output Voltage: 4VDC or 12VDC

Battery Capacity: 7Ah

Dimensions: 260 mm x 160 mm x 90 mm

IP Rating: Waterproof IP67 | NEMA 6

Weight: 4.5 kg



SOLAR PANEL

X-SOLAR



BeanDevice®
2.4GHz INC

BeanDevice®
2.4GHz HI-Inc

BeanDevice®
2.4GHz HI-Inc Xrange

BeanDevice®
2.4GHz AX-3D



PRIM-XTEND | REF : PRIM-XTEND




WATERPROOF IP67 BATTERY BOX FOR LONG-TERM MONITORING APPLICATIONS

- Battery Pack with 3 x C size primary cell, Li-SOCL2 Lithium Primary cell 3.6VDC Type [Ref : ER26500M]
- Suitable for BeanDevice® INC / HI-INC Xtender version [-XT extension in product reference]
- Waterproof (IP67) aluminum casing with 4 x eyelets for screw mounting
- Waterproof M8 plug , cable length : 2 meters, 5 meters and 10 meters
- Dimensions [with eyelets] : 155 x 80 x 40 mm
- Weight : 700 g





ProcessSensor | WIRELESS IOT DATA ACQUISITION (DAQ) INSTRUMENT

Main Features	BeanDevice® AN-420	BeanDevice® AN-V	BeanDevice® AN-mV
			
Reference	BND-2.4GHz-AN420-4CH	BND-2.4GHz-AN-V-4CH-MR	BND-2.4GHz-AN-mV-4CH
Measurement Range	4-20mA	±5V or ±10V	±20mV
Sensor Technology	Industrial sensors with 4-20mA output	Sensors with single-end or differential voltage output	Strain gage sensors (full bridge) Load Cell, Pressure sensor
Measurement Repeatability (full scale, @ 25°C)	< ±0.01%	< ±0.01%	< ±0.025% Static Measurement mode 2s < ±0.35% Dynamic Measurement mode 10Hz
External sensor power supply	4.5 to 20 volts, configurable from the BeanScope® software		
Number of channels	4 channels		
Maximum wireless Range	650 meters (Line of Sight) , 30-100 meters (Non Line of Sight)		
Maximum sampling rate per channel	400 Samples per second (16-bit ADC)		
Data Logger Size	1 million data points		
Battery	Lithium-polymer Rechargeable battery with 2200 mAh of capacity		
Operating temperature	-40°C to +65°C		
Casing	Aluminum, Watertight IP67 NEMA 4 casing dimensions (without antenna) L x w x h : 156mm x 82mm x 57mm Weight : 760g		


OPTIONAL ACCESSORIES

DISPLACEMENT SENSOR WITH INTEGRATED SPRING RETURN

Displacement Sensors compatible with Beandevic® 2.4GHz | AN-V

- Measurement range 10 - 100 mm
- Long mechanical life
- Excellent repeatability <0.01 mm

REF : DISP-SENS-SR-MS-YY-CL-XX

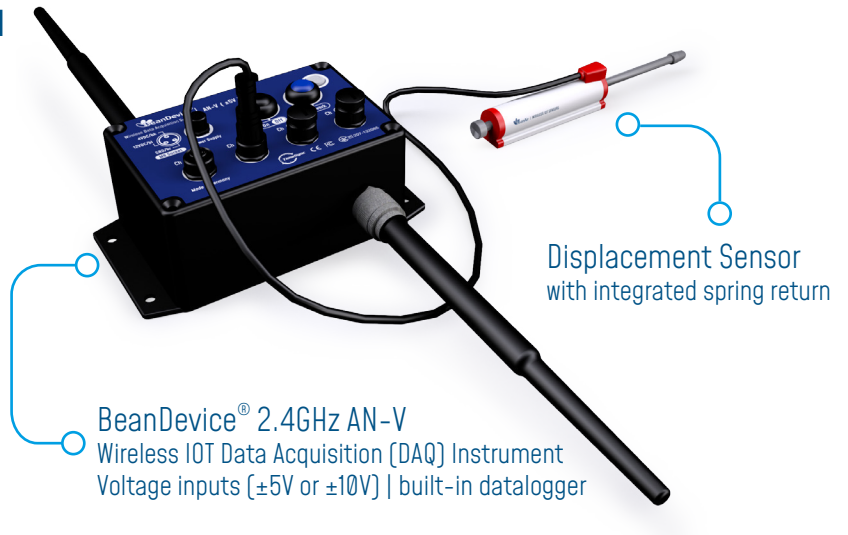

DISPLACEMENT SENSOR WITH BALL JOINT






Displacement Sensors compatible with Beandevic® 2.4GHz | AN-V



- Measurement range 10 - 400 mm
- Long mechanical life
- Excellent repeatability <0.01 mm

REF : DISP-SENS-BJ-MS-YY-CL-XX






Main Features	BeanDevice®		BeanDevice®		BeanDevice®
	ONE-T-ST	ONE-T-HA	ONE-T-HAEY	ONE-T-STCORE	ONE-T-ST-CL
					
Reference	BND-2.4GHz-ONE-T-ST	BND-2.4GHz-ONE-T-HA	BND-2.4GHz-ONE-T-HAEY	BND-2.4GHz-ONE-T-STCORE	BND-2.4GHz-ONE-T-ST-CL
Sensor Technology	standard accuracy	High accuracy	High accuracy with eyelet probe for wall mounting	standard accuracy with Temperature core probe with straight stainless steel Handle	standard accuracy with cable
Measurement Range	-25°C to +75°C	-10°C to +60°C	-10°C to +60°C	-50°C to +150°C	-50°C to +150°C
Sensor Resolution	0.1 °C	0.0034 °C	0.0034 °C	0.1 °C	0.1 °C
Sensor Accuracy	<ul style="list-style-type: none">±0.3 °C between -10 °C and +60 °C	<ul style="list-style-type: none">±0.2°C between -10°C and -5 °C±0.1°C between -5°C and +45°C±0.2°C between +45°C and +60°C		<ul style="list-style-type: none">±0.3 °C between -10 °C and +60 °C±[0.3 + 0.012(T-60)] °C between +60 °C and +150 °C± [0.3 - 0.012(T+10)] °C between -50 °C and -10 °C	
Maximum wireless Range (L.O.S.)	300m				
Data Logger Size	1 million logs				
Battery size	2100 mAh				
Mounting Techniques	Screw Mounting				
Casing	Waterproof IP67 Polycarbonate enclosure Dimensions in mm [LxWxH], 119 mm x 35 mm x 35 mm Weight (battery included), 120g				

Main Features	BeanDevice® ONE-TH	BeanDevice® ONE-TIR
		
Reference	BND-2.4GHz-ONE-TH-CL	BND-2.4GHz-ONE-TIR
Sensor Technology	Temperature, Humidity & Dew Point	IR temperature (non-contact temperature sensor)
Measurement Range	Temperature: -40°C to +85 °C Humidity: 0 to 100% RH	-40°C to +85°C for ambient temperature [Ta] -70°C to +380°C for object temperature [To]
Sensor Resolution	Temperature: 0.01 °C Humidity: 0.01% RH	0.02 °C
Sensor Accuracy	±0.1 °C , for temperature range +20°C to +60°C ±1.5 %RH for Humidity range 0 to 90 %RH and temperature range +10°C to +60°C	±0.5 °C
Maximum wireless Range (L.O.S.)	300m	
Data Logger Size	1 million logs	
Battery size	2100 mAh	
Mounting Techniques	Screw Mounting	
Casing	Waterproof IP67 Polycarbonate enclosure Dimensions in mm [LxWxH]: 119 mm x 35 mm x 35 mm Weight [battery included]: 120g	

DIGITAL SENSOR B-TH-01 | DIGITAL HUMIDITY AND TEMPERATURE SENSOR



DIGITAL SENSOR



Temperature Sensor technology: Thermistor
 Measurement range: 40°C to +85 °C
 Accuracy Tolerance: ±0.1 °C , for temperature range +20°C to +60°C
 Sensor resolution: 0.01 °C
 Dimensions[DxL]: 18mm x 57mm



BeanGateway®

WIRELESS IOT SENSORS COORDINATOR

MAIN FEATURES


- Builds and manages Beanair® Wireless IOT sensors
- **Wireless protocol stack:** IEEE 802.15.4
- **Several versions:** Ethernet, Modbus TCP / IP & Modbus RS485 / RS232
- **Maximus Radio range:** 1km (LOS)
- Embedded wireless IOT sensors diagnostic tool
- Advanced UPS (Uninterruptible power supply)
- Wireless IOT Sensors mapping & context is stored on embedded flash
- **<< Plug & Play >> installation:** no knowledge regarding Wireless IOT Sensors is necessary
- Integrated Lithium-Ion battery charger with high-precision battery monitoring
- Standard interface with our Wireless IOT Sensors Scada supervision Software (**BeanScape® 2.4GHz**)



INDOOR VERSION



OUTDOOR VERSION

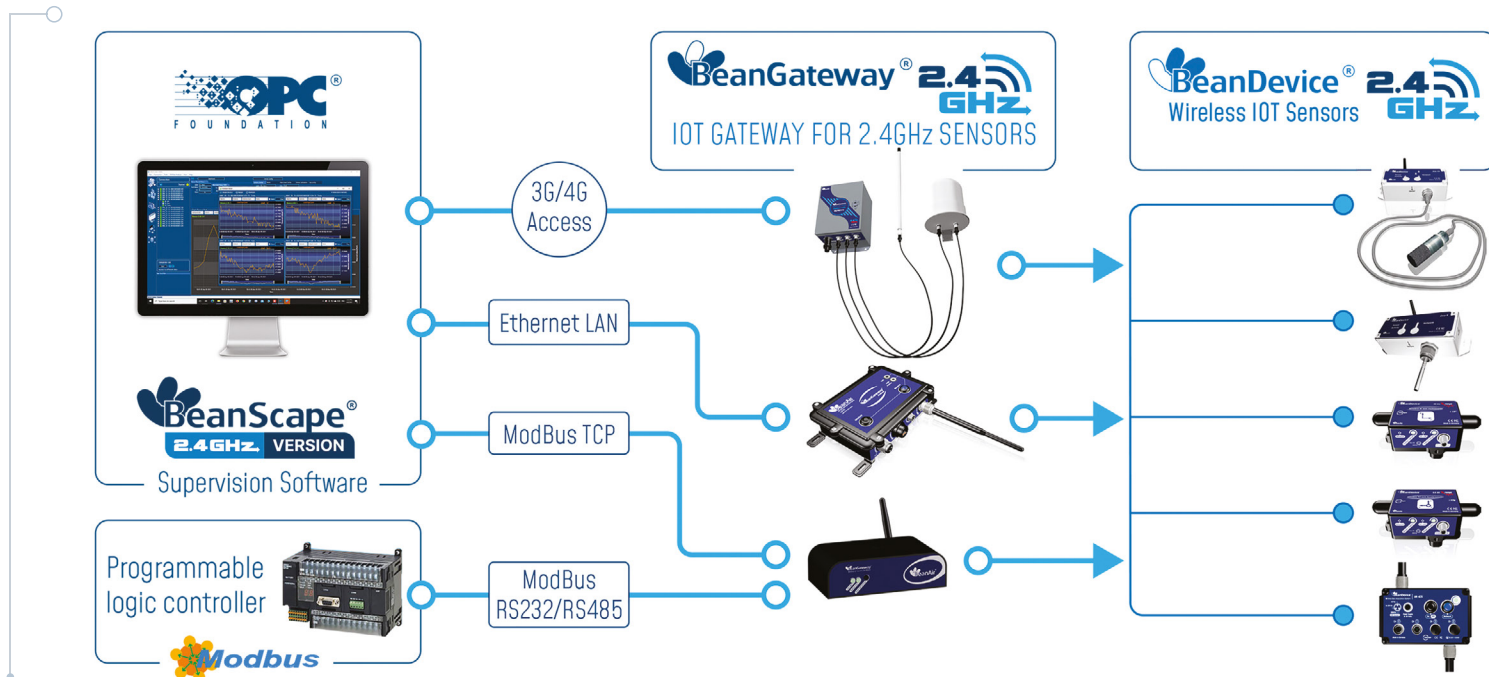

WIRELESS IOT SENSORS COORDINATOR | 3G/4G/LTE LINKS | REMOTE ACCESS

OUTDOOR VERSION (WATERPROOF)

The **BeanGateway® 2.4Ghz-4G version** is a ruggedized outdoor wireless coordinator (IP66) designed for Structural Health Monitoring, Ground vibration monitoring and Land Surveying applications. Integrating both 2.4GHz and 3G/4G/LTE wireless protocols, it is used to build and manage Beanair® wireless sensor network. The **BeanGateway® 2.4Ghz-4G version** comes with two power supply versions:

- Solar Panel (50W Monocrystalline Technology)
- Mains power supply (94-264VAC)

An integrated rechargeable Lead-acid battery with a capacity of 12Ah is used as an UPS battery (uninterruptible power supply). It provides instantaneous protection from external power supply interruption; wireless sensor networks & 3G/4G/LTE activities are maintained during this time. Users looking for a safe deployment on a remote site will appreciate our powerful WSN (Wireless Sensor Networks) mapping management:


- Automatic backup on both flash memory and **BeanScape® 2.4GHz** software.
- Export/Import function on others **BeanGateway® 2.4Ghz**

APPLICATIONS

• LAND SURVEYING

• GROUND VIBRATION MONITORING

• STRUCTURAL HEALTH MONITORING

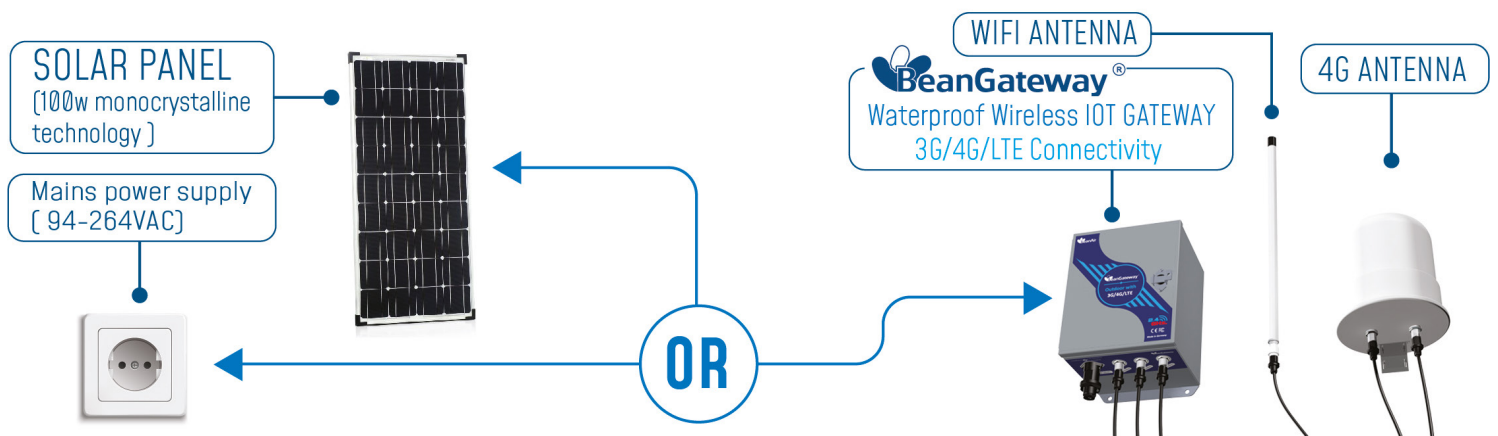

MAIN FEATURES

- Wireless IOT sensors Coordinator
- Ultra-Low-Power and license-free **2.4Ghz** radio technology (IEEE 802.15.4E)
- Remote access thanks to the integrated 3G/4G/LTE Router (4G Connectivity CAT4 up to 150 Mbps)
- Configuration and supervision of Wireless IOT sensors
- Advanced Wireless IOT sensors diagnostic tool
- Data Organization from the various Wireless IOT sensors
- Data exchange with the **BeanScape® 2.4Ghz** (Wireless IOT sensors supervision software)
- Robust, Waterproof and High Gain antennas:
 - 3G/4G/LTE antenna (2x2 MIMO) with 12dBi of Gain
 - 2.4GHz antenna with 9dBi of Gain
- Advanced UPS (Uninterruptible power supply) with lead-acid battery (capacity: 12Ah)
- Ruggedized and Waterproof IP66 casing with anti-thief protection
- Two power-supply versions: AC power supply and solar panel

WIRELESS IOT COORDINATOR SELECTION GUIDE

Product description	Product Ref.	Ethernet Interface	ModBus ASCII / RTU over RS485	ModBus ASCII / RTU over RS232	ModBus IP	Waterproof IP66/IP67	3G/4G/LTE	Power Supply
BeanGateway® Ethernet Indoor casing	BGTW-2.4GHz-ETH-IND	✓						Mains 8-28VDC
BeanGateway® Ethernet Outdoor casing	BGTW-2.4GHz-ETH-OUT	✓				✓		Mains 8-28VDC
BeanGateway® Ethernet ModBus TCP/IP Indoor casing	BGTW-2.4GHz-ETH-MODIP-IND	✓			✓			Mains 8-28VDC
BeanGateway® Ethernet ModBus TCP/IP Outdoor casing	BGTW-2.4GHz-ETH-MODIP-OUT	✓			✓	✓		Mains 8-28VDC
BeanGateway® Ethernet ModBus TCP/IP & Modbus over RS485 Indoor casing	BGTW-2.4GHz-ETH-MODRS485-IND	✓	✓		✓			Mains 8-28VDC
BeanGateway® Ethernet ModBus TCP/IP & Modbus over RS485 Outdoor casing	BGTW-2.4GHz-ETH-MODRS485-OUT	✓	✓		✓	✓		Mains 8-28VDC
BeanGateway® Ethernet ModBus TCP/IP & Modbus over RS232 Indoor casing	BGTW-2.4GHz-ETH-MODRS232-IND	✓		✓	✓			Mains 8-28VDC
BeanGateway® Ethernet ModBus TCP/IP & Modbus over RS232/RS485 Indoor casing	BGTW-2.4GHz-ETH-MODSERIAL-IND	✓	✓	✓	✓			Mains 8-28VDC
BeanGateway® 3G/4G/LTE Outdoor casing	BGTW-2.4GHz-4G-MPWR-OUT					✓	✓	Mains 8-28VDC
BeanGateway® 3G/4G/LTE Outdoor casing	BGTW-2.4GHz-4G-SOLAR-OUT					✓	✓	Solar Power Supply

AN EASY INTEGRATION INTO YOUR IT SYSTEM

Thanks to ModBus protocol available on our [BeanGateway® 2.4Ghz](#), seamless integration with a third-party PLC / Embedded PC is possible.

ModBus registers enable data collection from the wireless sensor networks.

The **BeanScape® 2.4GHz** is a real time wireless IOT sensors supervision and control monitor. It allows the user to monitor and operate in real time BeanAir® wireless IOT sensors.

The **BeanScape® 2.4GHz** is also equipped with a smart expert system that allows users to interpret elements such as data acquisition or alarms related to the sensor network.

SOFTWARE VERSIONS

						
Number of managed BeanDevice® 2.4GHz	5	35	35	Unlimited	Unlimited	Unlimited
Multiple BeanGateway® (Wireless IOT Gateway) connections	✗	✗	✗	✓	✓	✓
Period technical assistance [e-mail]	1 month	1 month	1 year	1 year	1 year	1 year
OPC Server DA	✗	✗	✗	✗	✓	✓
Free of cost ?	✓	✓	✗	✗	✗	✗
Real-time graph display	✓	✗	✓	✓	✓	✓
Alarm notification by email: System and Data Acquisition alarms	✗	✗	✓	✓	✓	✓
Streaming with Event-Trigger [S.E.T.] mode	✗	✗	✓	✓	✓	✓
FTP client	✗	✗	✗	✓	✓	✓
NTP client	✗	✗	✓	✓	✓	✓
Real-Time FFT, Real-Time Velocity	✗	✗	✗	✓	✓	✓
Automatic Reports [Waveform , FFT, PPV, Velocity]	✗	✗	Only Waveform report	✓	✓	✓
Multi-user access	✗	✗	✗	✗	✗	✓
Free updates	✓	✓	1 year	1 year	1 year	1 year

MINIMUM SYSTEM REQUIREMENTS


- 2.33GHz or faster x86-compatible processor
- Microsoft® Windows® XP (32-bit), Windows Server® 2003 (32-bit), Windows Server 2008 (32-bit), Windows Vista® (32-bit), Windows 7 (32-bit and 64-bit), Windows 10 (32-bit and 64-bit)
- 2GB of RAM
- 5 GB of disk space
- 128MB of graphics memory

CONNECT OUR WIRELESS IOT SENSORS TO A THIRD-PARTY SOFTWARE

Both [BeanScape® 2.4GHz Premium+ / Multiview](#) integrate an OPC DA server (Data Access).

OPC DA is particularly well suited for real time measurement and data sharing. Each data/measurement can be associated to a tag or its attributes and shared with one or several OPC clients.


It opens up to many third party applications (SCADA, web portals etc..). Our OPC server is DA 2, DA 2.5 and DA 3 compliant and allows two different presentations. The first is a compact presentation of the sensor tree, presenting all the secondary attributes under the form of attributes. The second is an extended presentation of the sensor tree where each secondary attribute is presented by an OPC item/ tag rather than an attribute.

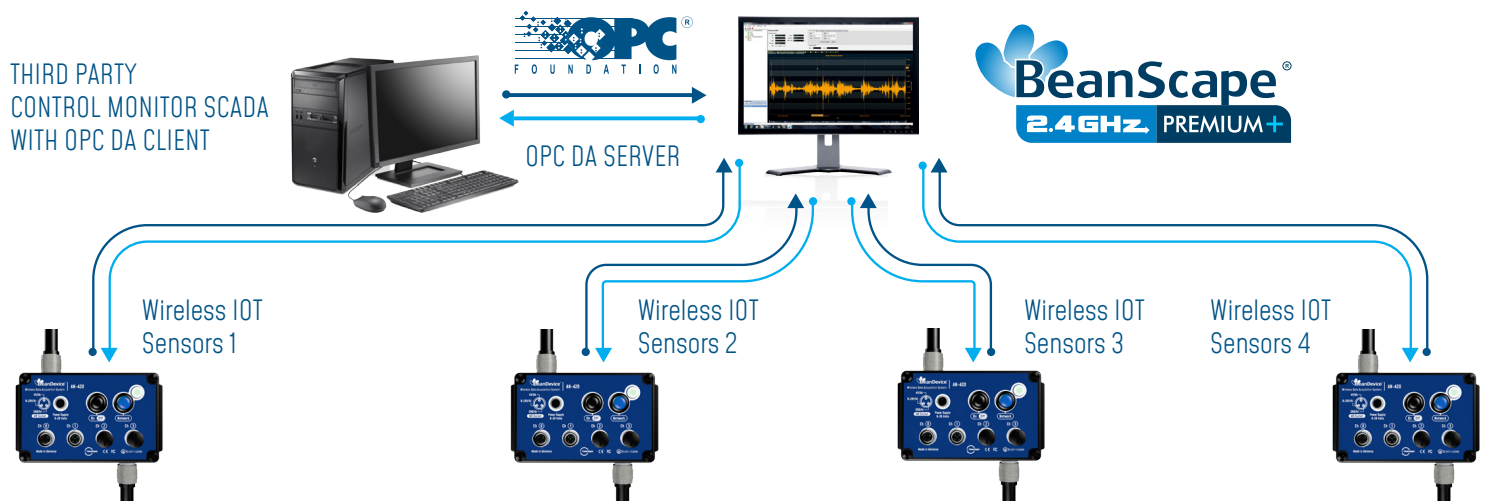

User looking for an easy integration with their PLC/Embedded PC can select the [BeanGateway® 2.4GHz](#) with Modbus communication link .

Modbus registers allows to collect data measurement and to configure remotely Beanair Wireless IOT Sensors.

Modbus protocol will work perfectly with [Beandevise® 2.4GHz](#) operating with a slow measurement heartbeat.

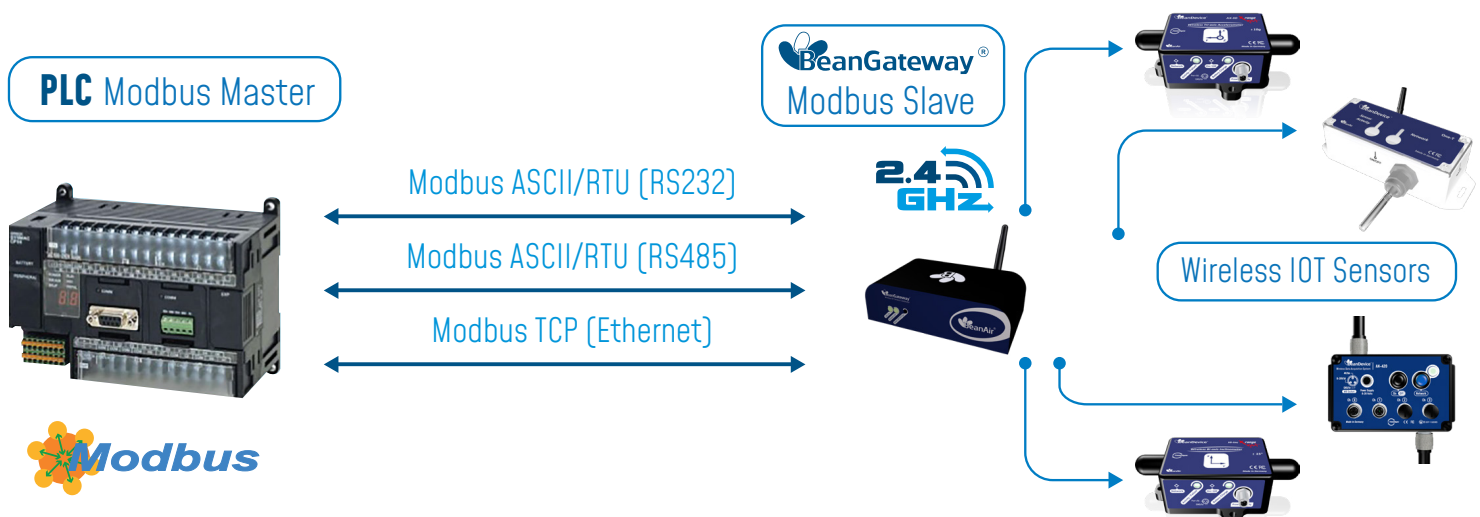

OVERVIEW AND MAIN FEATURES

The **BeanScape® Wilow®** is a real time Supervision software dedicated to Wilow® Wireless IOT sensors. It's also equipped with a smart expert system that allows users to interpret elements such as data acquisition or alarms related to the Wireless IOT sensors network.

The **BeanScape® Wilow®** comes with outstanding features:

- Supervision software fully dedicated to Wilow® Wireless IOT sensors
- Integrated MQTT Broker for a remote access to monitoring site (BeanScape® Wilow® RA)
- Fully integrated Wireless IOT Sensors maintenance tool
- User friendly and highly adaptable to user's environment
- Highly intuitive and easy to use GUI (Graphical User Interface)
- Real time integrated database
- The **BeanScape® Wilow® Premium/RA** provides a complete vibration diagnostic and report:
 - Real-Time vibration, FFT and Peak Particle Velocity display
 - Advanced vibration analysis tool: FFT, PPV (Peak Particle Velocity) on the $\pm 2g$ version only,
 - Amplitude measurement for structure movement monitoring
 - Automatic FFT and Peak Particle Velocity reports (meeting the DIN4150-3 standard)
 - Alarm generation by email when a vibration threshold is reached
- Highly customizable data panel board
- No hidden fees, and no additional subscription

SEVERAL VERSIONS ARE AVAILABLE (SEE COMPARISON TABLE FOR MORE DETAILS):

- **BeanScape® Wilow® Manager**: the right software version for configuring Beanair Wireless IOT Sensors
- **BeanScape® Wilow® Lite**: the right software version to evaluate quickly Beanair Wireless IOT Sensors
- **BeanScape® Wilow® Basic**: Same features than BeanScape® Wilow® Lite, with Alarm notification by email
- **BeanScape® Wilow® Premium** : Same features than BeanScape® Wilow® Basic, with advanced vibration analysis tools (Real-Time Velocity and FFT, PPV values).
- **BeanScape® Wilow® RA**: Same features than BeanScape® Wilow® Premium, with remote access to monitoring site (MQTT Architecture)







REAL TIME & FULLY INTEGRATED DATA BASE :

The real time database records high sampling measurement plots and Wireless IOT Sensors activities with a small memory footprint :

- No installation is needed
- Data backup (activable/disactivable functionality).
- Easily exportable data in CSV format (Access, Excel, Matlab, Labview...).

SOFTWARE VERSIONS

					
Period technical assistance	6 months	6 months	1 year	1 year	1 year
Free of cost ?	✓	✓	✗	✗	✗
Number of managed Beandevic [®] Wilow	35	5	35	unlimited	unlimited
Real-time graph display	✗	✓	✓	✓	✓
Alarm notification by email: System and Data Acquisition alarms	✗	✗	✓	✓	✓
Streaming with Event-Trigger (S.E.T.) mode	✗	✓	✓	✓	✓
Real-Time FFT, Real-Time Velocity	✗	✗	✗	✓	✓
Automatic reports by email (Waveform, FFT, PPV, Particle Velocity)	✗	✗	Only Waveform report	✓	✓
Remote access (based on MQTT Architecture)	✗	✗	✗	✗	✓
Integrated MQTT Broker	✗	✗	✗	✗	✓
MQTT full services (Diagnostics, Measurement and remote configuration)	✓	✓	✓	✓	✓
Free updates	✓	✓	1 year	1 year	1 year

MINIMUM SYSTEM REQUIREMENTS

- 2.33GHz or faster x86-compatible processor
- Microsoft[®] Windows[®] XP (32-bit), Windows Server[®] 2003 (32-bit), Windows Server 2008 (32-bit), Windows Vista[®] (32-bit), Windows 7 (32-bit and 64-bit), Windows 10 (32-bit and 64-bit)
- 4GB of RAM
- 10 GB of disk space
- 1 GB of graphics memory



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm



BeanAir Germany
Wolfener Straße 32-34
12681 Berlin - Germany



Visit us:
www.beanair.com



Email:
info@beanair.com



Office line:
+49 (0) 30 98366680