

General information

PVS28320191003

The UWT 6008 Ethernet IP weight transmitter stems from the experience of Pavone Systems and it is unique in the weight transmitter family. It is ideal for all industrial applications where it is necessary to know the load distribution on the different cells. The UWT 6008 Ethernet IP weight transmitter is able to monitor all load cells and generate alarms due to excessive cell signal drift, missing connections, failure of one cell and unbalanced weight distribution. The emulative control allows the weighing system to work even in case of failure on one load cell, until its replacement. The Software Optimization is given for free. This Software allows you to run certain activities such as calibration or monitoring directly from your computer. The Optimization software is provided by Pavone Systems and guarantees a perfect instrument run.

Software Optimization 1.3.12: [optimization_weighing_software.zip](#)Ethernet IP EDS file: [uwt_6008_ethernet_ip_eds.zip](#)Technical Manual: [uwt-6008_en.pdf](#)

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).



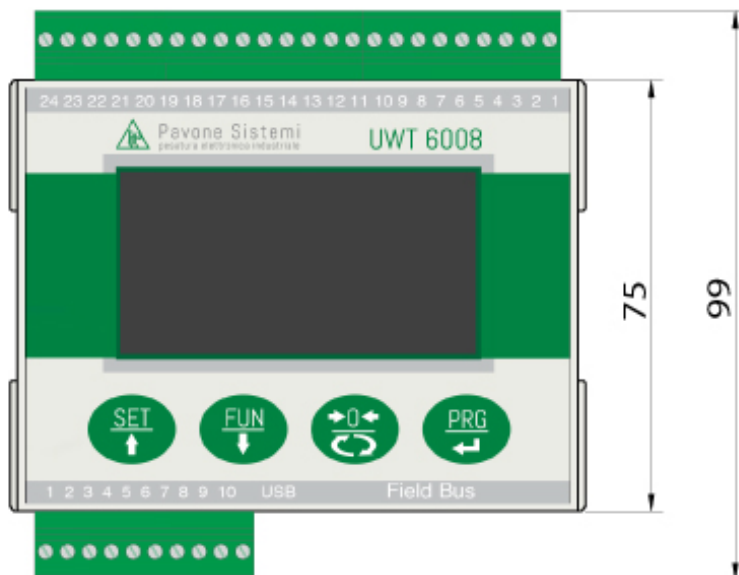
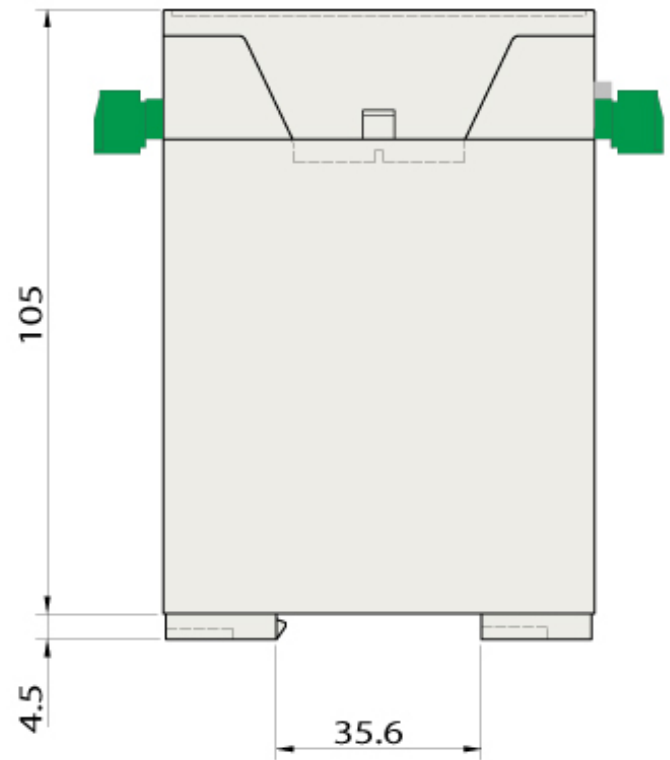
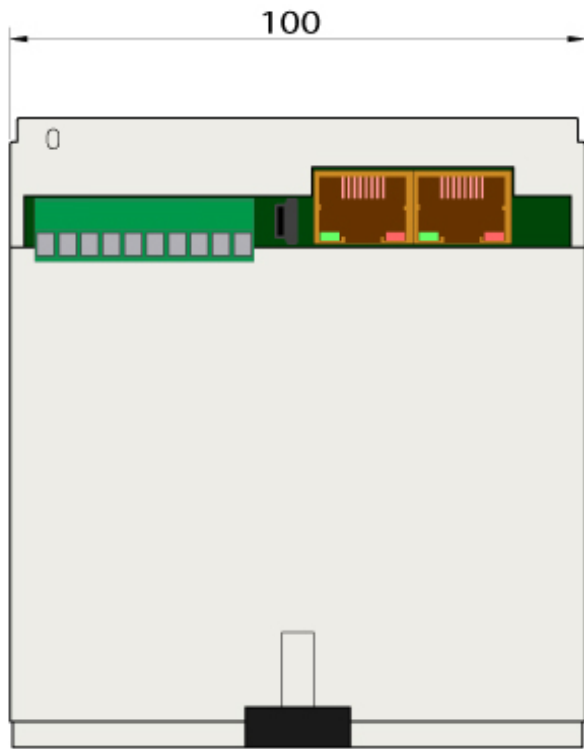
SCIGATE AUTOMATION (S) PTE LTD
No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm

Technical specifications

PVS28320191003

Measuring range:	-3.9 ÷ +3.9 mV/V
Input sensitivity:	0.02 µV/count
Full scale non-Linearity:	<0.01%
Gain drift:	< 0.001% FS/°C
Display:	128 x 64-pixel graphic LCD
A/D Converter:	24 bits
Internal Resolution:	> 16.000.000 points
Transducer input voltage:	5 Vdc (230 mA max.)
Frequency signal acquisition:	12,5 ÷ 300 Hz
Visible resolution (in divisions):	999999
Divisions value (adjustable):	x1, x2, x5, x10, x20, x50
Decimal figures range:	0 ÷ 4
Temperature range:	-10 ÷ +50°C (max. humidity: 85% without condensation)
Storage temperature:	-20 ÷ +70°C
Filter:	5 ÷ 250 Hz
Logic output:	2 relays, Max. 48 Vac/Vdc, 2A each
Logic input:	2 opto-isolated at 12/24 Vdc PNP (external power supply)
Serial port:	1 USB device + 1 RS232C + 1 RS485
Analog output Non-Linearity:	< 0,02%
Temperature drift analog output:	0,001% FS/°C
Power supply:	12-24 Vdc ±15% - power consumption 4 W
Microcontroller:	ARM Cortex M0+ at 32 bits, 256KB Flash reprogrammable on-board from USB
Data storage:	64 Kbytes expandable up to 1024 Kbytes
Regulatory compliance:	EN61000-6-2, EN61000-6-3 for EMC; EN61010-1 for Electrical Safety, EN45501 for metrology
Number of load cells:	1 ÷ 8
Dimensions:	100 x 75 x 110 mm (L x H x P)

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

Weight Transmitter UWT 6008 Ethernet IP


All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).