


R08ID3S-CHU1

8.4" Panel PC (Intel® Atom™ Dual Core D2550 Processor)


Mechanical Design



Chassis

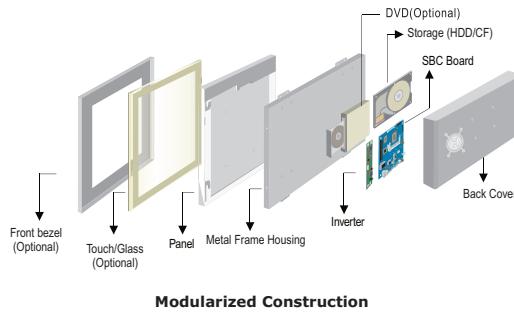


Modularized Construction





1. DC-IN Power Jack
2. VGA Out
3. USB
4. RS-232/422/485
5. RJ-45
6. Dimming Knob

FRONT VIEW




SIDE VIEW



SIDE VIEW



BACK VIEW



BOTTOM VIEW



- * Measurements shown in mm
- * Tolerance of all dimensions is shown of follow 0~30 mm ± 0.1 mm, 30~50 mm ± 0.15 mm, 50~120 mm ± 0.2 mm, above 120 mm ± 0.25 mm
- * Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Specifications

System:

- CPU : Intel®Atom™ Dual Core D2550 1.86GHz Processor
- Memory Slot : 1 x SODIMM, Max 4GB DDR3 1600/1333
- System Chipset : Intel®Nm10
- IDE/SATA : 2 x SATA
- LAN : Dual Broadcom BCM57780 GbE controller

Input / Output :

- Serial Ports : 1 x RS232, 1 x RS232/422/485
 - USB Ports : 2 x USB
 - Ethernet : 2 x RJ45-10/100/1000
 - VGA : 1 x VGA
 - Power Input : 1 x DC-IN Power Jack
- Default setting:RS232

Expansion Slots:

- 1 x Mini PCIe slot (for wireless module)
- 1 x Mini PCIe slot (for SATA SSD)

* A customized housing is needed if you would like to have the PCI expansion.

Power Specifications :

- Power Input : 12V DC-IN Power input
- Power Consumption : 35W (typ.)(Max.backlight & high CPU load)

Accessories :

- External Power Supply 50W w/power cord

Panel Spec :

- Size/Type : 8.4"TFT
- Resolutions : 800x600
- Brightness : 600 (typ.)
- Contrast Ratio : 600: 1 (typ.)
- Viewing Angle : -75~75(H);-60~70(V)
- Max. Colors : 16.2M(8bits/color)

Environment Considerations :

- Operating Temperature : 0 deg.C to 50 deg.C
- Operating Humidity : 30% to 90% (non condensing)

Order Options :

Mechanical : Chassis	RAM : SODIMM DDR3
Touch : 4 Wires Resistive(Optional)	1600/1333 Max 4GB
	OS : Windows 7 embedded /
	Windows XP embedded
	(Optional)



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592

Tel: (65) 6561 0488

Fax: (65) 6562 0588

Email: sales@scigate.com.sg

Web: www.scigate.com.sg

Business Hours: Monday - Friday 8.30am - 6.15pm



09-May-2016 V1.4

Note: All Specifications are subject to change without prior notice!