

Switch-Pak™ AX1X

with Compact Junction Box



Application

The intrinsically safe or general purpose level switch package provides high or low liquid level detection with one relay or reed switch output, and a compact junction box for wiring termination. Available in three level sensor technologies, choose the sensor type based upon your application media. This PP or PVDF level switch package is selected for bulk storage, IBC or drum, and neutralization tank applications, connected to a PLC or relay controller.



SCIGATE AUTOMATION (S) PTE LTD

No.1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm

Features

- Rugged polypropylene or PVDF construction for use with corrosive liquids
- Available in intrinsically safe and general purpose classifications
- 60VA relay or 15VA dry contact switches selectable NO or NC via wiring
- Offered in three sensing technologies for broad application coverage
- Polypropylene enclosure rated NEMA 4X with swivel base for conduit alignment



AU18-4243 Shown

Key Benefits

- Ideal single-point high or low level switch solution for PLC or controller input
- Available in three sensor technologies and two materials for all types of liquid media

Sensor Technologies



LU10

SWITCH-TEK™

Ultrasonic Level Switch - IS

Broadly applied in chemicals and light weight oils



SWITCH-TEK™

Vibration Level Switch

- GP
Applied in wastewater with



LV10

SWITCH-TEK™

Vertical Buoyancy Level Switch

- GP
Applied in clean water and

Switch-Pak™ AX1X


with Compact Junction Box



Specifications

- Length:** 6" to 10' (15cm to 3m)
- Accuracy:** ± 1mm in water
- Repeatability:** ± 0.5mm in water
- Orientation:** ± 20° vertical
- Switch points:** 1 (factory set)
- Supply voltage:** AV16: N/A
AU18: 12-36 VDC
AZ18: 12-30 VDC
- Consumption:** AV16: N/A
AU18 / AZ18: 25 mA max.
- Contact type:** AV16: (1) SPDT reed
AU18 / AZ18: (1) SPST relay
- Contact rating:** AV16: 15 VA, 0.25A max.
AU18 / AZ18: 60 VA, 1A max.
- Contact output:** Selectable NO / NC
- Process temp.:** F: -40° to 176°
C: -40° to 80°
- Ambient temp.:** F: -40° to 140°
C: -40° to 60°
- Installed height:** 3.6" (9.1cm) above tank process mount
- Pressure:** AV16: 25 psi (1.7 bar)
AU18 / AZ18: 150 psi (10 bar)
- Enclosure rating:** NEMA 4X (IP65)
- Enclosure mat.:** PP, UL94VO
- Terminal strip:** 6-pole, socket
- Cond. entrance:** 1/2" NPT
- Wetted material:** AV16-224X: PP
AU18-224X: PP
AU18-524X: PVDF
AZ18-424X: PP-Ryton®
- Process mount:** -X243: 2" NPT
-X247: 1-1/2" G
- Classification:** AV16 / AZ18: general purpose, AU18: intrinsically safe (see LU10 data sheet for details)
- Compliance:** CE

Dimensions

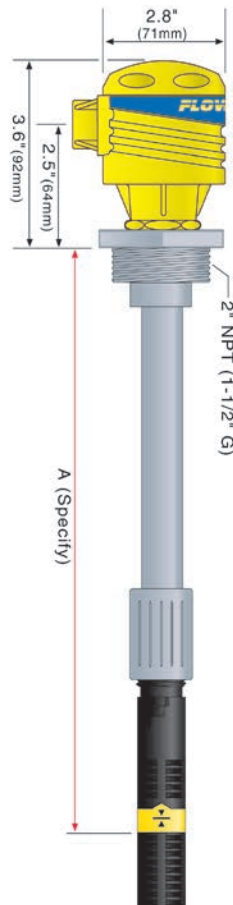

Fittings

For optimum performance, install Switch-Pak™ using the below recommended or direct equivalent fittings.


P/N	DESCRIPTION
LM52-2400	3" NPT x 2" NPT, PVC, schedule 40
LM52-2800	3" NPT x 2" NPT, PVC, schedule 80
LM52-3800	4" NPT x 2" NPT, PVC, schedule 80
LM52-2410	3" socket x 2" NPT, PVC, schedule 40
LM52-3410	4" socket x 2" NPT, PVC, schedule 40
LM52-2810	3" socket x 2" NPT, PVC, schedule 80
LM52-3810	4" socket x 2" NPT, PVC, schedule 80
LM52-2890	2" NPT bulkhead, PVC
LM52-2850	2" ANSI x 2" NPT, PVC, schedule 80
LM50-1001	2" NPT side mount bracket, PP

Relay Control

For remote relay control, add a LC4X (general purpose) or LC9X (isolation) controller to Switch-Pak™. They're available in two configurations with one or two switch inputs and one or two relay outputs for pump shut off, valve closure or alarm actuation.



Ordering

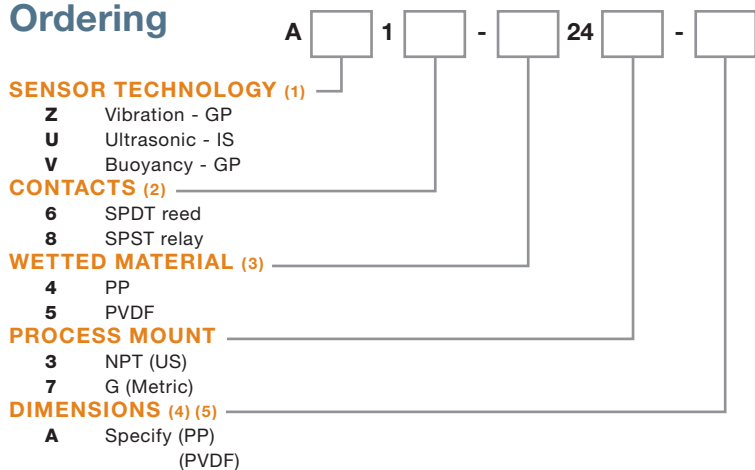

NOTES

- 1) Select the best sensor technology based upon your application.
- 2) Available only in the following configurations:
Vibration = AZ18 (General purpose with relay contact)
Ultrasonic = AU18 (Intrinsically safe with relay contact)
Buoyancy = AV16 (General purpose with reed contact)
- 3) PVDF is only available with ultrasonic or buoyancy sensors.
- 4) Specify the A-dimension at the end of the part number (ie: AV16-4243-17"). The dimension may be specified in 1/2" (1.3cm) increments from 6" to 10' (15cm to 3m).
- 5) To calculate the length adder, round up the A-dimension to the next foot (30cm), multiply it by the selected material, and add that sum to the price. For PP, add \$10 per foot (30cm). For PVDF, add \$50 per foot (30cm).